

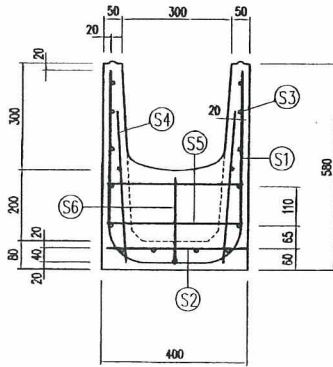


底部

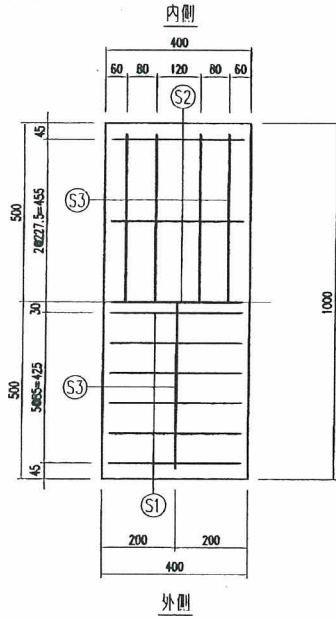

側壁部


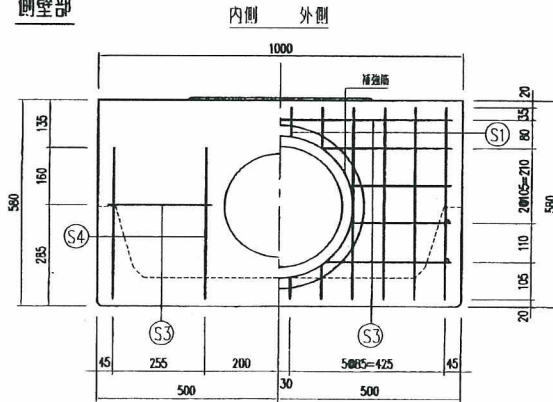


鉄筋加工図

Ⓜ D10×12-1354


Ⓜ D6×8-426

Ⓜ D10×4-370




Ⓜ D10×5-370

Ⓜ D6×2-245





Ⓜ D6×16-940



補強筋 D6×2-1257

補強筋 D6×2-1445



品名	マルチスリット側溝用柵	設計条件	T-25	設計基準強度	$\sigma_{ck}=30N/mm^2$ ( $\sigma_{ca}=10N/mm^2$ )	図	A	縮	1	設計・製図	製図	承認	
寸法	300	図面種別	配筋図	許容応力度	$\sigma_{sa}=160N/mm^2$	面	2	尺	10	設計	製図	承認	図面番号
												masu300b2	