


ワイフリューム H500xB300

2-110


鉄筋加工図

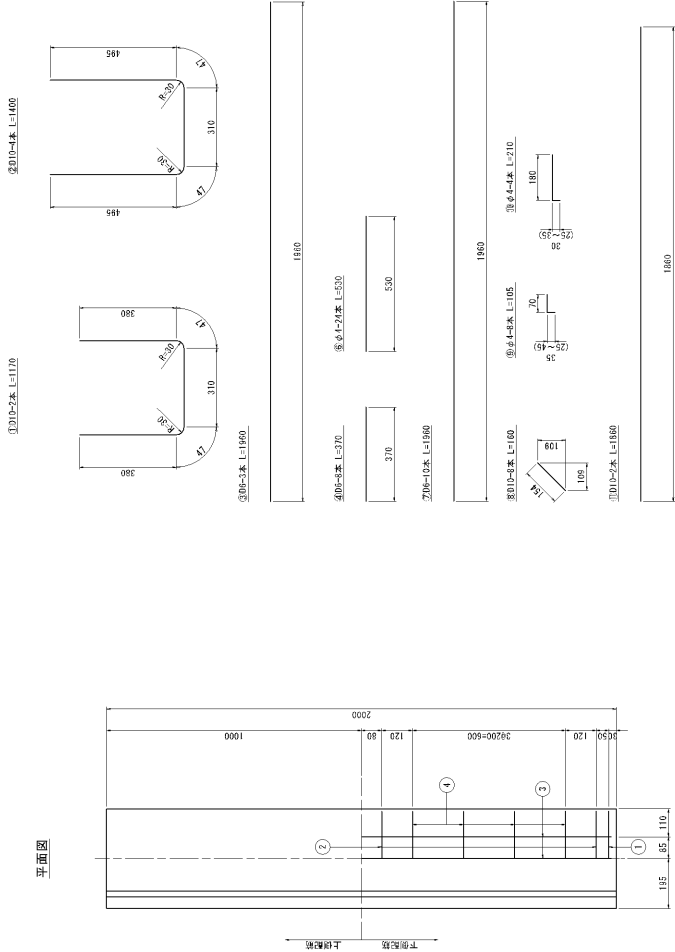


材料表 (一本当り)

種別	No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D10	1170	2	1.310	U	S32BSA
	2	D10	1400	4	3.126	U	S32BSA
	3	D6	1860	3	1.464	—	S32BSA
	4	D6	370	8	0.737	—	S32BSA
	5	—	—	—	—	—	—
	6	φ4	530	24	1.259	—	S32BSA
	7	D6	1860	8	3.904	—	S32BSA
	8	D10	160	8	0.717	—	S32BSA
	9	φ4	106	8	0.063	—	S32BSA
	10	φ4	210	4	0.063	—	S32BSA
	11	D10	1860	2	2.083	—	S32BSA
筋							
計					14.776		
製品重量					374	kg	


側面図

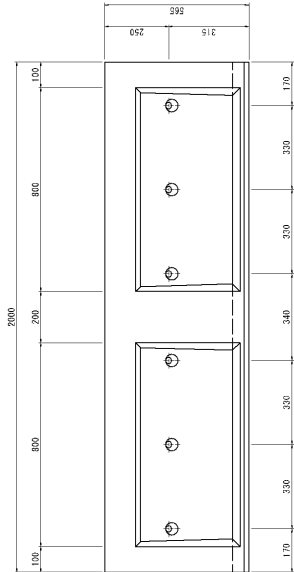

断面図



側正図

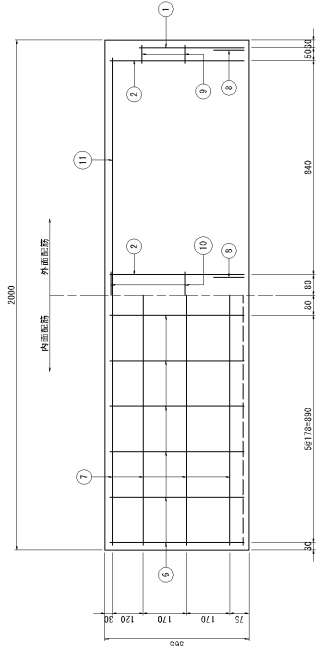


ワイドフレーム H500xB400

2-110

材料表 (一本当り)



種別No	径 (mm)	本数	重量 (kg)	形状	材質	
1	D10	2	1.422	U	SUS304	
2	D10	1600	4	3.360	U	SUS304
3	D6	1660	3	1.464	—	SUS304
4	D6	470	8	0.606	—	SUS304
5	—	—	—	—	—	—
6	φ4	530	24	1.250	—	SUS304
7	D6	1660	8	3.904	—	SUS304
8	D10	160	8	0.717	—	SUS304
9	φ4	106	8	0.083	—	SUS304
10	φ4	210	4	0.083	—	SUS304
11	D10	1660	2	2.083	—	SUS304
計						
			15.311			
部品重量			405	kg		

平面図

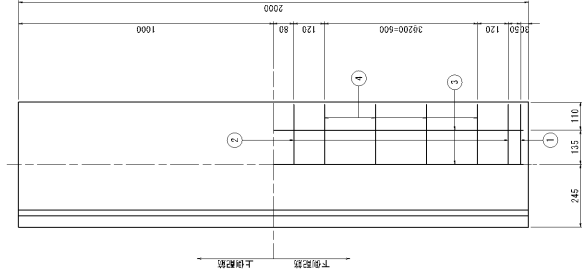


①D10×2本 L=1210

②D10×4本 L=1660




③D10×3本 L=1660



④D10×3本 L=170




⑤D10×3本 L=170




⑥D10×4本 L=1660




⑦D10×2本 L=1660




側面図

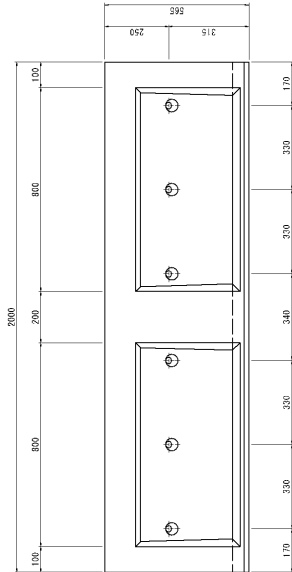

断面図




側面図

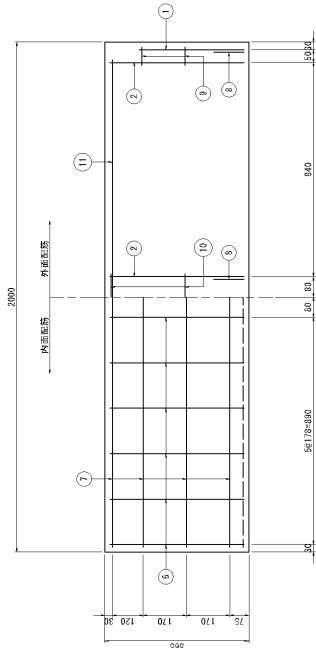


ワイフリューム H500xB500

2-110

継ぎ加工図

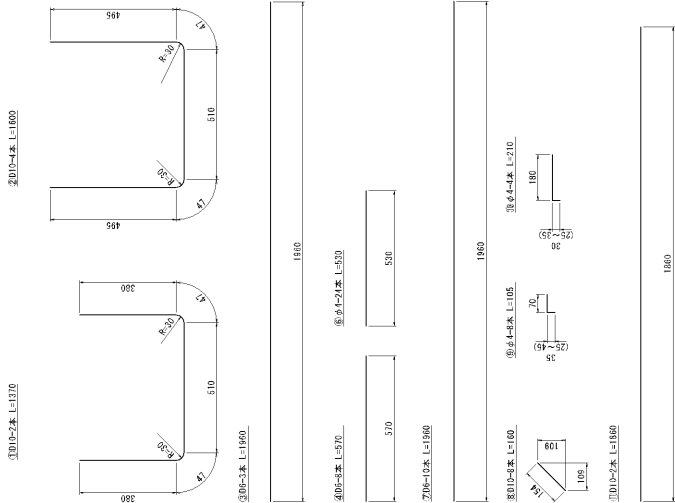


平面図

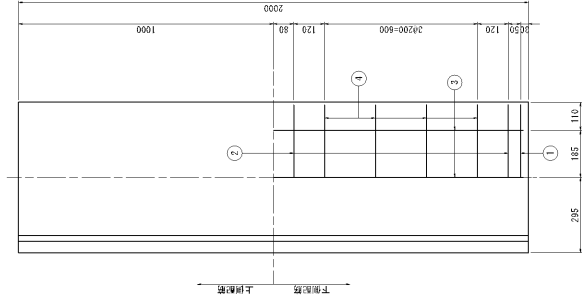


材料表 (一本当り)

種別	No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D10	1370	2	1.524	U	S32B5A
	2	D10	1600	4	3.584	U	S32B5A
	3	D6	1600	3	1.464	—	S32B5A
	4	D6	570	8	1.155	—	S32B5A
	5	—	—	—	—	—	—
	6	φ4	520	24	1.259	—	S32B5A
	7	D6	1600	8	3.904	—	S32B5A
	8	D10	160	8	0.717	—	S32B5A
	9	φ4	105	8	0.083	—	S32B5A
	10	φ4	210	4	0.083	—	S32B5A
	11	D10	1600	2	2.083	—	S32B5A
筋							
計					15.846		
部品重量					436	kg	


側面図

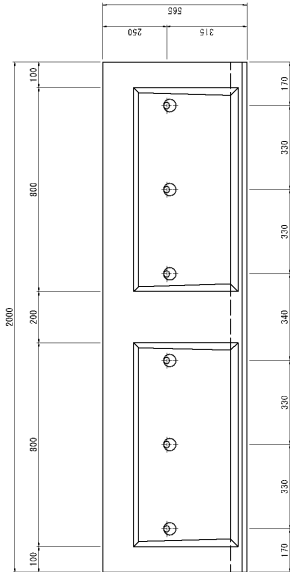

断面図




側面図

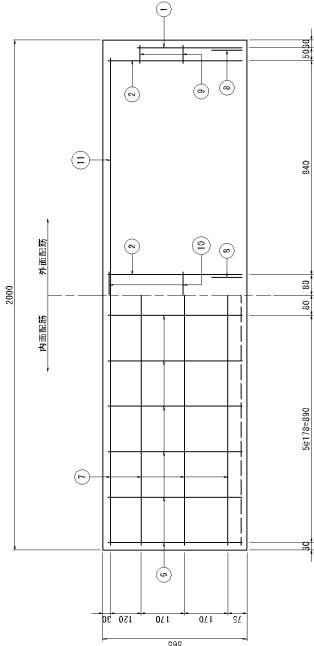


ワイドフレーム H500xB600

2-110

鉄筋加工図

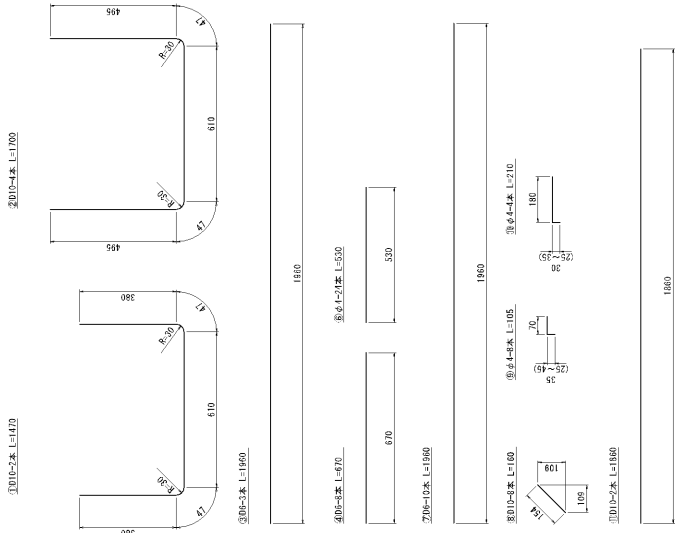


平面図

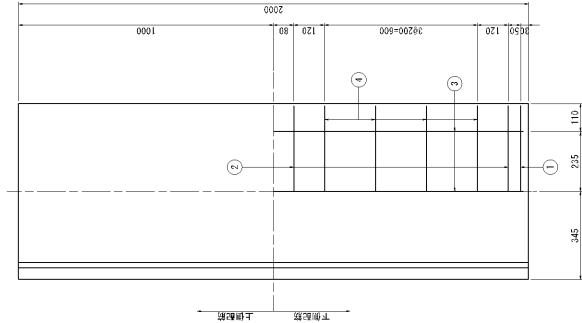


材料表 (一本当り)

種別No	径 (mm)	本数	重量 (kg)	形状	材質
1	D10	2	1.646	U	S32B5A
2	D10	2	1.646	U	S32B5A
3	D10	2	1.646	U	S32B5A
4	D6	8	1.252	—	S32B5A
5	—	—	—	—	—
6	Φ4	520	24	—	S32B5A
7	D6	1660	8	—	S32B5A
8	D10	1660	8	—	S32B5A
9	Φ4	106	8	—	S32B5A
10	Φ4	210	4	—	S32B5A
11	D10	1660	2	—	S32B5A
計			466		
部品重量			466		


側面図

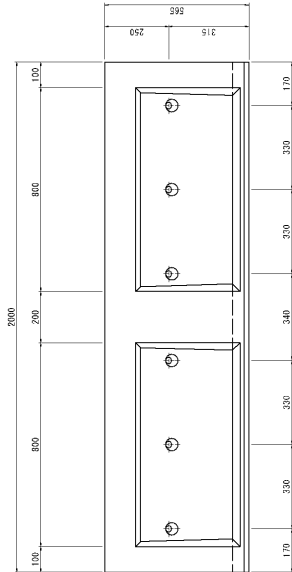

断面図




側面図

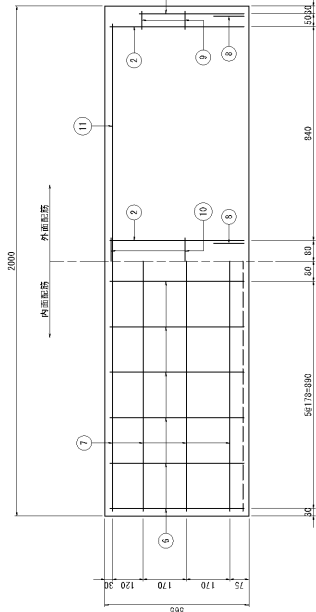


ワイフリューム H500xB700

2-110

鉄筋加工図

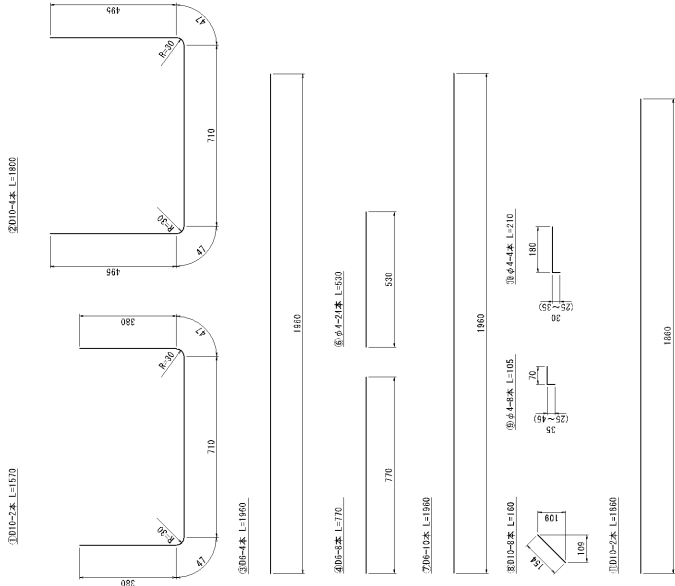


平面図

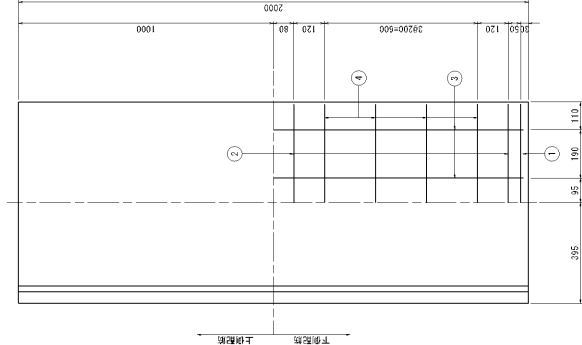


材料表 (一本当り)

種別No	径 (mm)	本数	重量 (kg)	形状	材質
1	D10	2	1.758	U	S32B5A
2	D10	4	4.032	U	S32B5A
3	D6	8	1.862	—	S32B5A
4	D6	8	1.524	—	S32B5A
5	—	—	—	—	—
6	φ4	530	24	—	S32B5A
7	D6	1960	8	—	S32B5A
8	D10	180	8	—	S32B5A
9	φ4	105	8	—	S32B5A
10	φ4	210	4	—	S32B5A
11	D10	1860	2	—	S32B5A
計					
部品重量			497	kg	


側面図

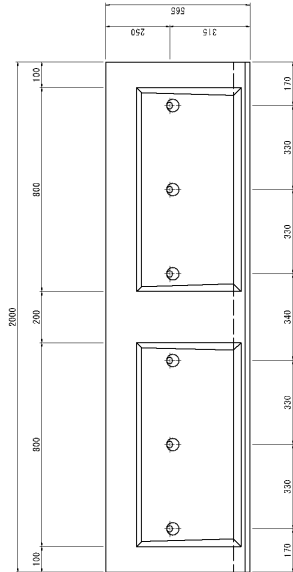

断面図

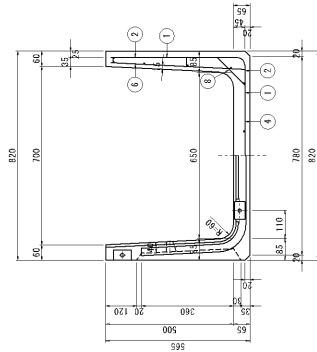

側面図

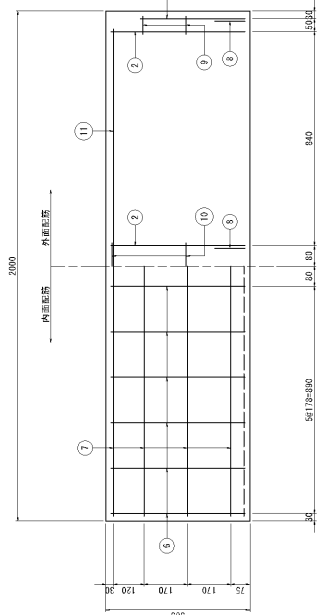


ワイドフレーム H500xB800

2-110


材料表 (一本当り)

種別No	径 (mm)	本数	重量 (kg)	形状	材質
1	D10	870	2	U	SUS304
2	D10	1900	4	U	SUS304
3	D6	1960	4	—	SUS304
4	D6	870	8	—	SUS304
5	—	—	—	—	—
6	φ4	530	24	—	SUS304
7	D6	1960	8	—	SUS304
8	D10	160	8	—	SUS304
9	φ4	106	8	—	SUS304
10	φ4	210	4	—	SUS304
11	D10	1960	2	—	SUS304
計					
部品重量			527	kg	


平面図

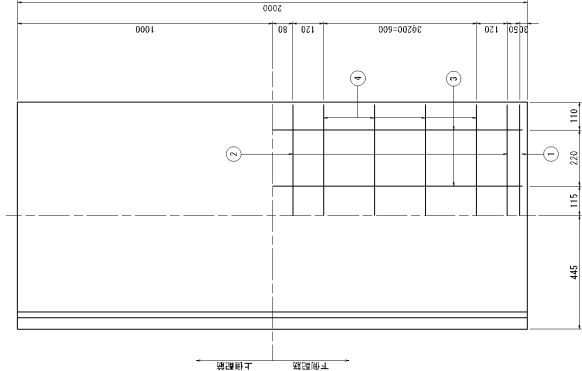


縁部加工図

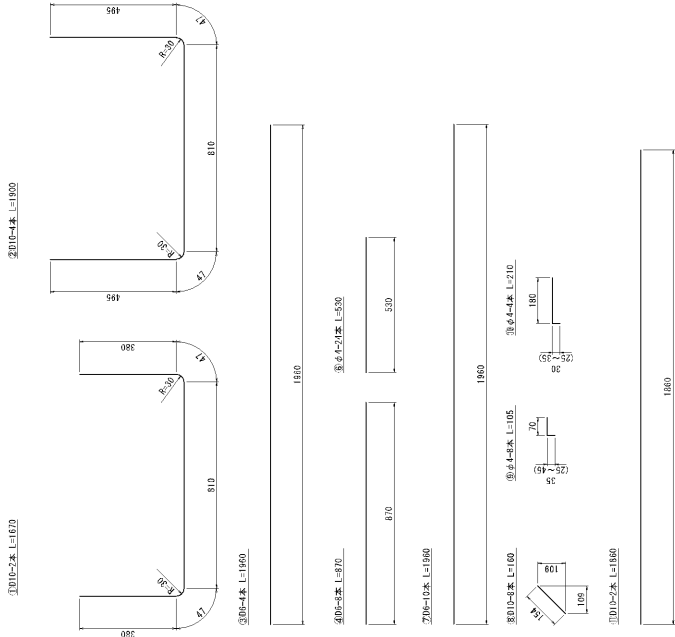


側面図

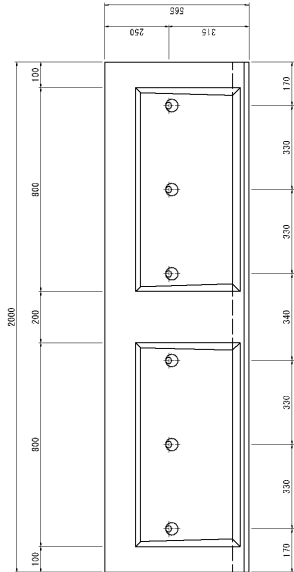

断面図

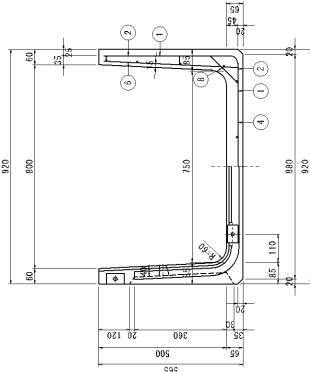


側正図

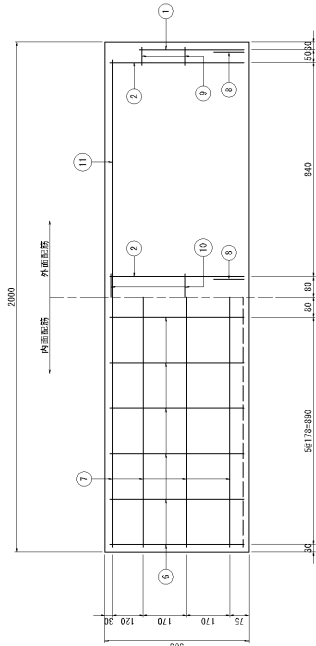

ワイドフレーム H500xB900

2-110


鉄筋加工図

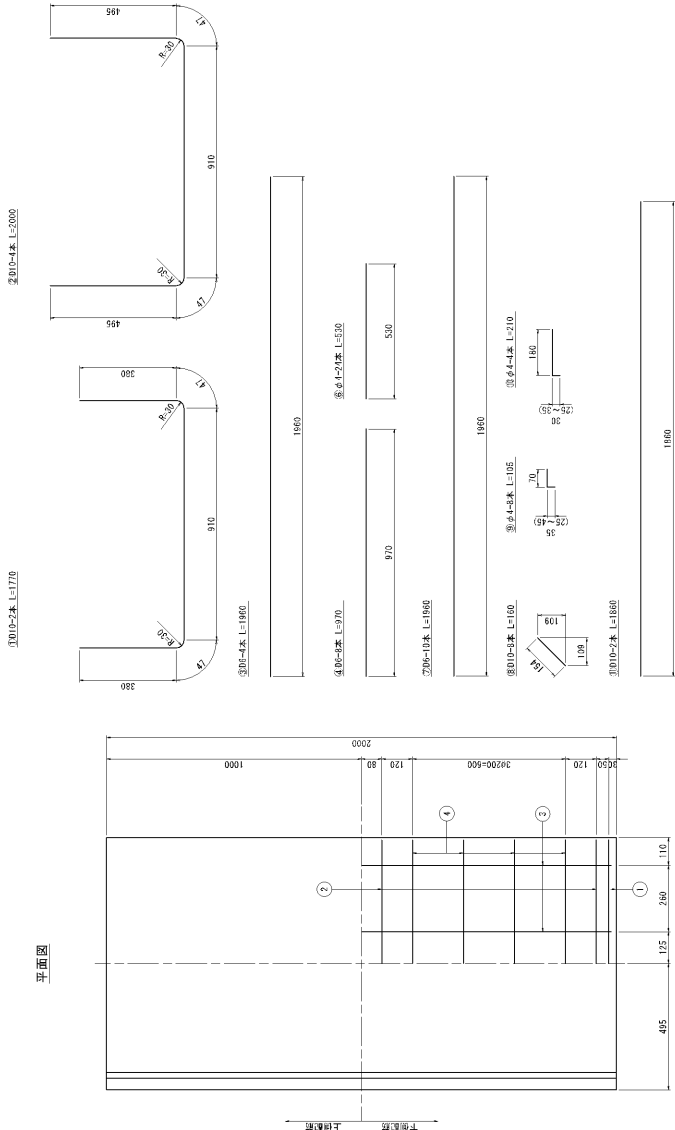


材料表 (一本当り)

種別No	径 (mm)	本数	長さ (mm)	重量 (kg)	形状	材質
1	D10	2	1860	0.3295	U	S3295A
2	D10	2	1860	0.3295	U	S3295A
3	D6	4	1000	0.083	U	S3295A
4	D6	4	1000	0.083	U	S3295A
5	-	-	-	-	-	-
6	φ4	520	24	1.250	U	S3295A
7	D6	1860	8	3.904	U	S3295A
8	D10	1860	8	0.717	U	S3295A
9	φ4	106	8	0.083	U	S3295A
10	φ4	210	4	0.083	U	S3295A
11	D10	1860	2	2.083	U	S3295A
計				18.475		
部品重量				558	kg	


側面図

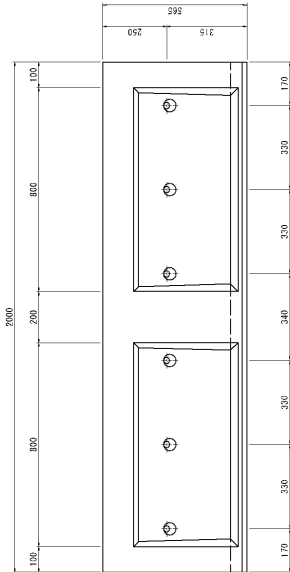

断面図

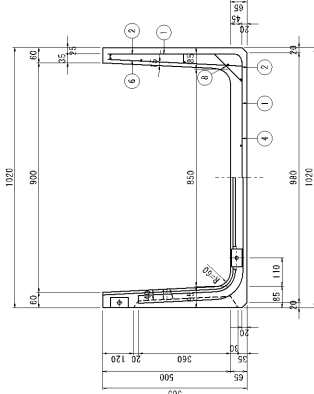


側面図

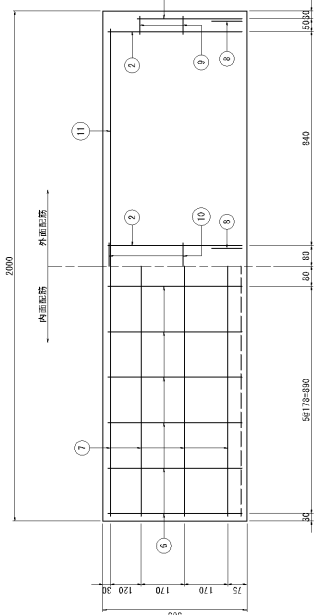


ワイドフレーム H500xB1000

3-110

鉄筋加工図

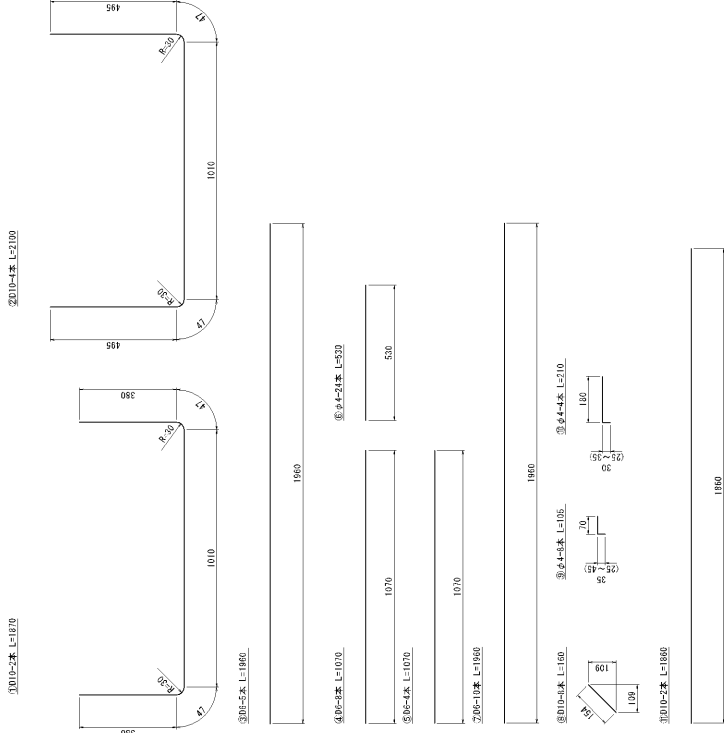


平面図

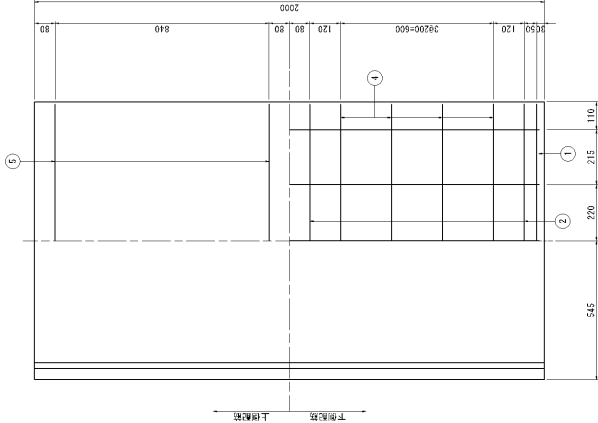


材料表 (一本当り)

種別	N°	径	長さ	本数	重量	形状	材質
鉄	1	10D	1870	2	2.594	—	S313FA
	2	10D	2100	4	4.704	—	S313FA
	3	10D	1960	5	2.440	—	S313FA
	4	10D	1070	8	2.131	—	S313FA
	5	10D	1070	4	1.066	—	S313FA
	6	6E	530	24	1.259	—	S313FA
	7	10D	1960	8	3.904	—	S313FA
	8	10D	1860	8	0.717	—	S313FA
	9	6E	1050	8	0.983	—	S313FA
	10	6E	210	4	0.083	—	S313FA
	11	10D	1860	2	2.083	—	S313FA
筋							
	計				20.564		
総重量					588	kg	


側面図

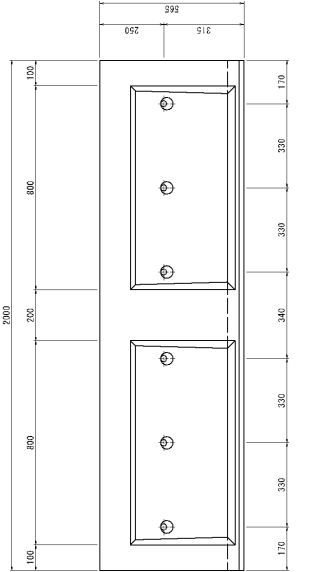

断面図

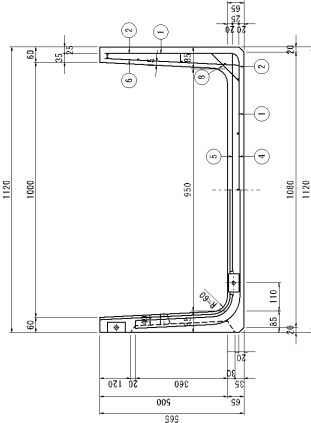


側面図

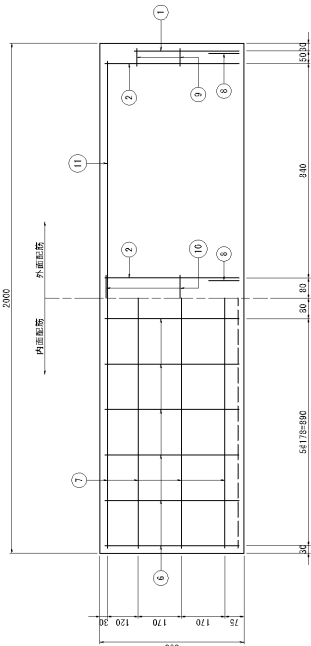


ワイフリューム H600xB500

2-110

鉄粉加工図

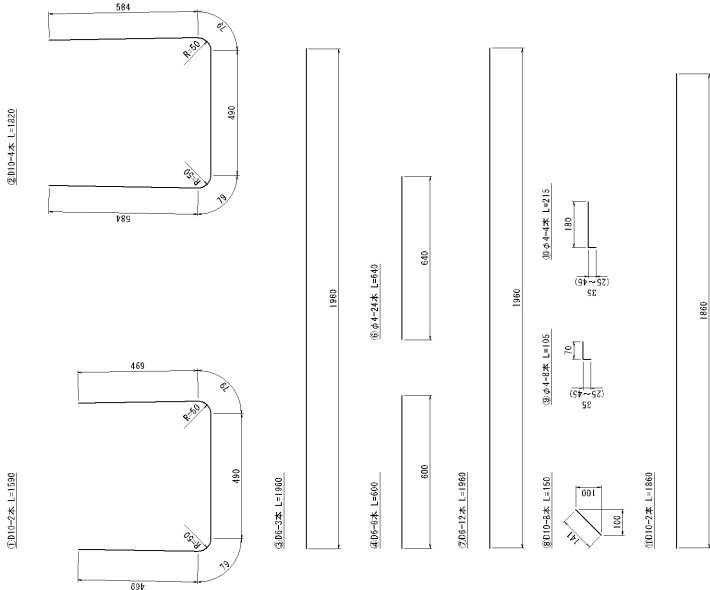


平面図

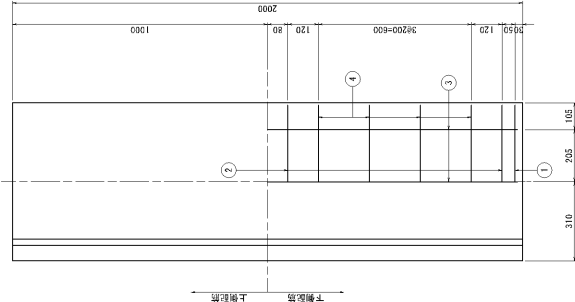


材料表 (一本当り)

種別	N.0	径	長さ	本数	重量	形状	材質
鉄	1	D10	1500	2	1.781	U	SPC55A
	2	D10	1800	4	4.077	U	SPC55A
	3	D6	1500	2	1.464	U	SPC55A
	4	D6	1800	8	1.195	U	SPC55A
	5	-	-	-	-	-	-
	6	φ4	640	24	1.521	-	SPC55A
	7	D6	1800	10	4.580	-	SPC55A
	8	D10	150	8	0.672	-	SPC55A
	9	φ4	105	8	0.052	-	SPC55A
	10	φ4	215	4	0.052	-	SPC55A
	11	D10	1800	2	2.052	-	SPC55A
筋							
計					17.841		
製品重量					493	kg	


側面図

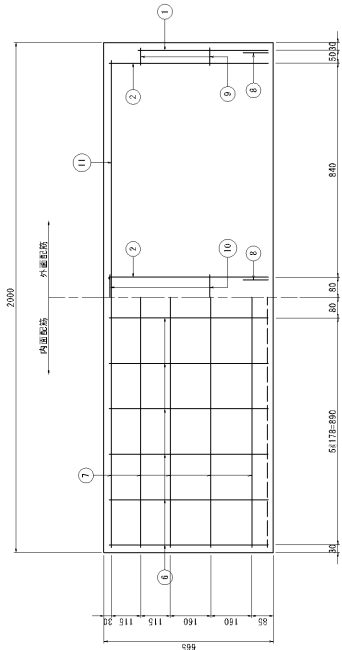

断面図




側面図

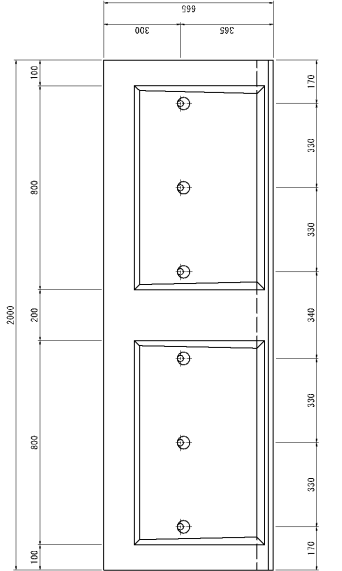


ワイドフレーム H600xB600

2-110

鉄粉加工図

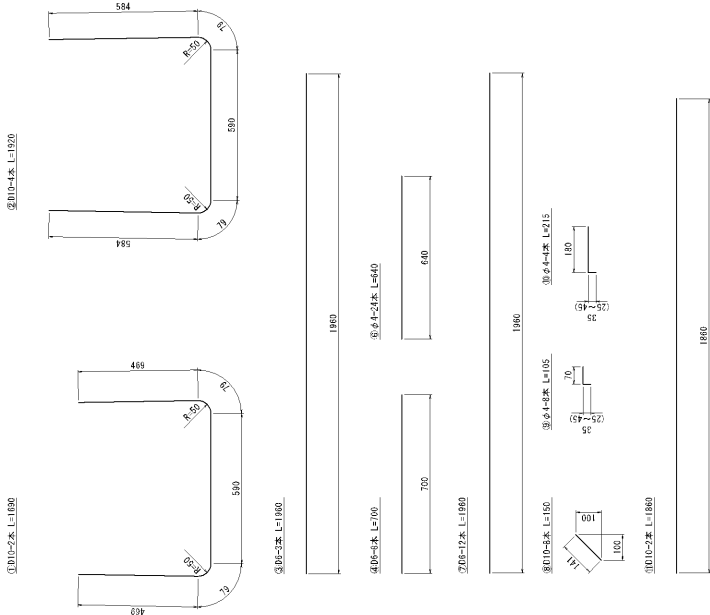


平面図

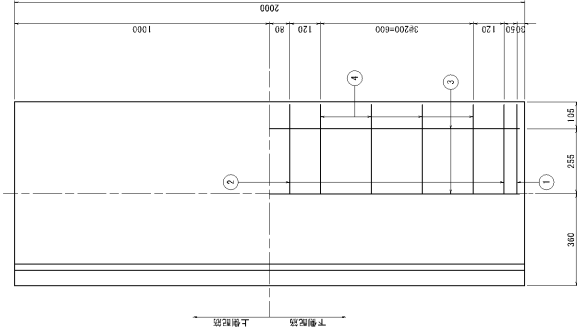


材料表 (一本当り)

種別	N	径	長さ	本数	重量	形状	材質
鉄	1	D10	1000	2	1.800	—	SPC55A
	2	D10	1000	4	4.201	—	SPC55A
	3	D6	1000	2	1.464	—	SPC55A
	4	D6	700	8	1.394	—	SPC55A
	5	—	—	—	—	—	—
	6	φ4	640	24	1.521	—	SPC55A
	7	D6	1000	10	4.580	—	SPC55A
	8	D10	150	8	0.672	—	SPC55A
	9	φ4	105	8	0.065	—	SPC55A
	10	φ4	215	4	0.065	—	SPC55A
	11	D10	1000	2	2.063	—	SPC55A
筋	—	—	—	—	—	—	—
	—	—	—	—	—	—	—
計					18.276	—	—
製品重量					52.4	kg	—


側面図

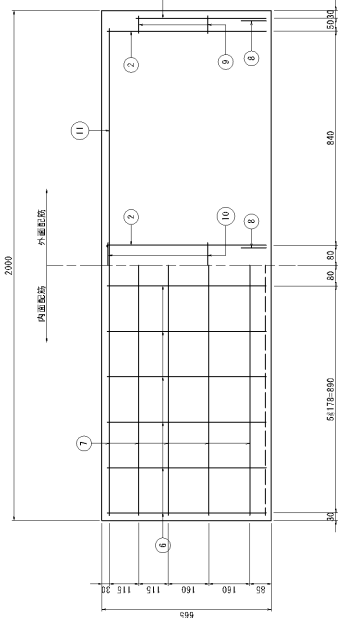

断面図




側面図

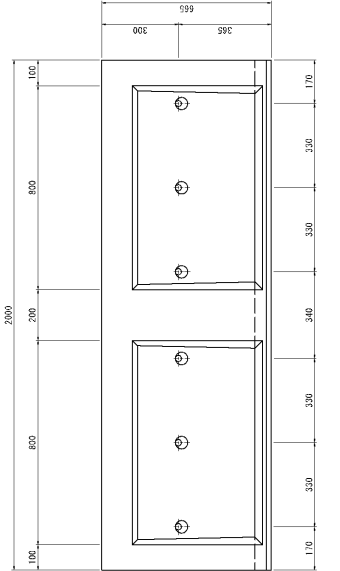


ワイドフレーム H600xB700

2-110

鉄粉加工図

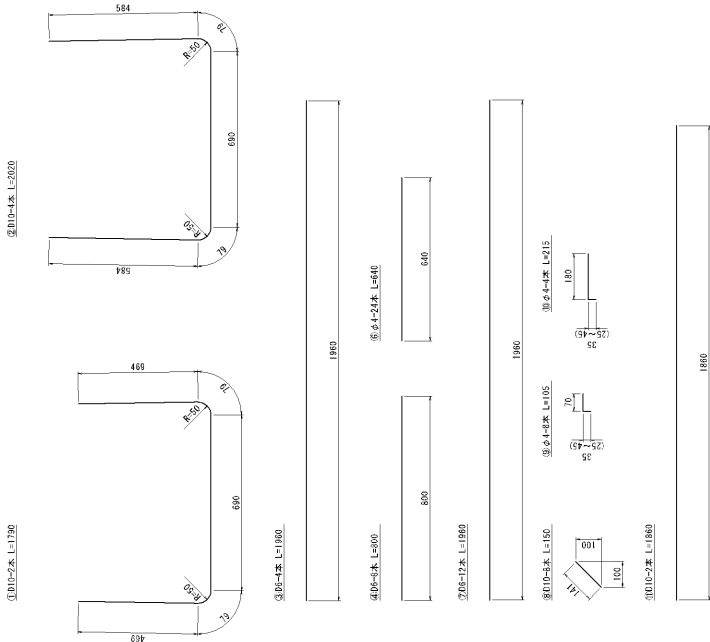


正面図

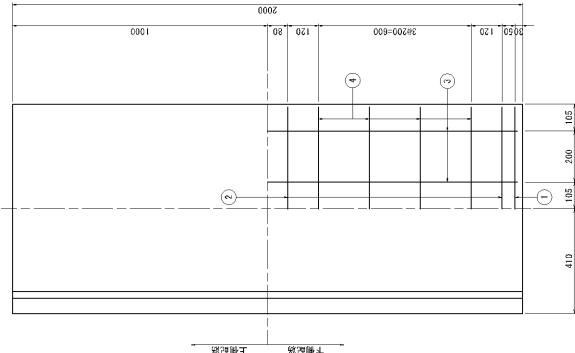


材料表 (一本当り)

種別	N	φ	径	長さ	本数	重量	形状	材質
鉄	1	D10	1960	2	2.005	—	—	SP-SC54
	2	D10	2020	4	4.525	—	—	SP-SC54
	3	D6	1960	4	1.867	—	—	SP-SC54
	4	D6	800	8	1.594	—	—	SP-SC54
	5	—	—	—	—	—	—	—
鉄	6	φ4	640	24	1.521	—	—	SP-SC54
	7	D6	1960	10	4.580	—	—	SP-SC54
	8	D10	150	8	0.672	—	—	SP-SC54
	9	φ4	105	8	0.063	—	—	SP-SC54
	10	φ4	215	4	0.063	—	—	SP-SC54
	11	D10	1860	2	2.063	—	—	SP-SC54
筋	—	—	—	—	—	—	—	—
	—	—	—	—	—	—	—	—
計					—	16.400	—	—
製品重量					554	kg	—	—


側面図

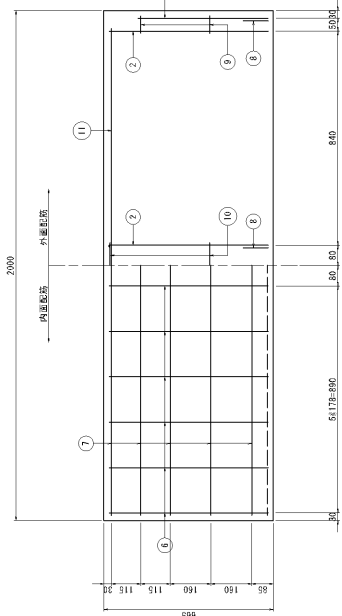

断面図

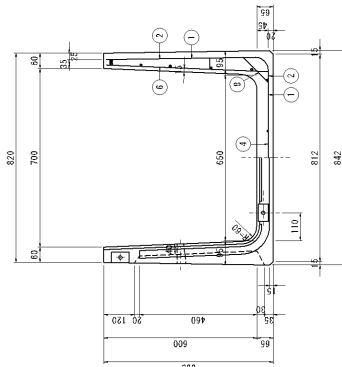


側面図

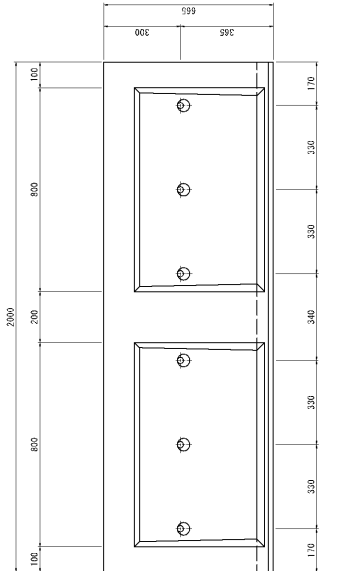


ワイドフレーム H600xB800

2-110

鉄粉加工図

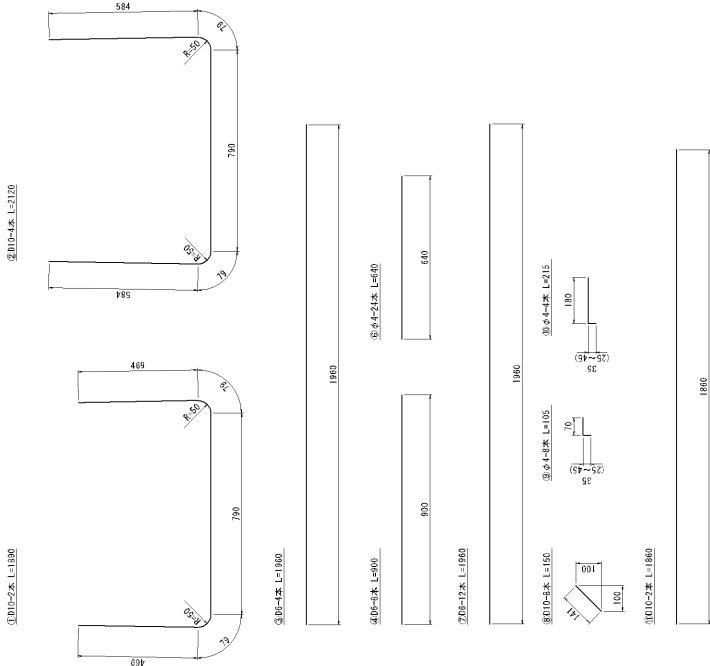


平面図

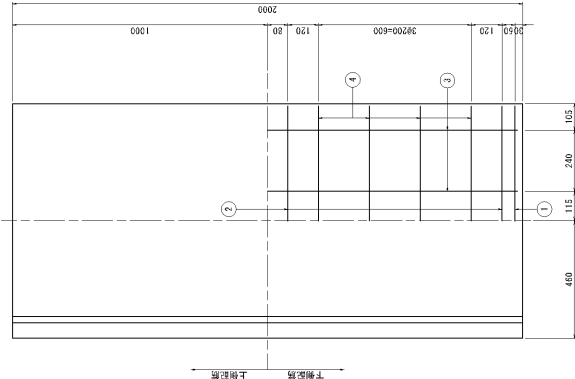


材料表 (一本当り)

種別	N	径	長さ	本数	重量	形状	材質
鉄	1	D10	1800	2	2.117	U	SP35A
	2	D10	2120	4	4.748	U	SP35A
	3	D6	1800	4	1.802	U	SP35A
	4	D6	900	8	1.792	U	SP35A
	5	-	-	-	-	-	-
	6	φ4	640	24	1.521	-	SP35A
	7	D6	1800	10	4.580	-	SP35A
	8	D10	150	8	0.672	-	SP35A
	9	φ4	105	8	0.062	-	SP35A
	10	φ4	215	4	0.062	-	SP35A
	11	D10	1800	2	2.062	-	SP35A
筋							
計					16.802		
製品重量					595	kg	


側面図

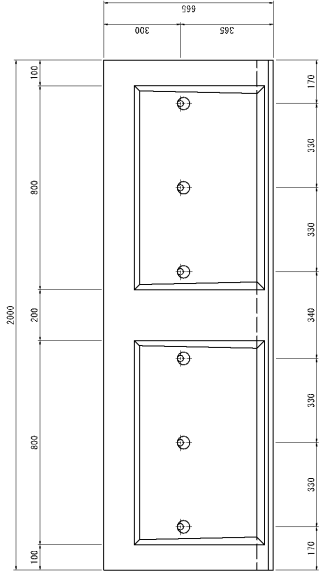

断面図

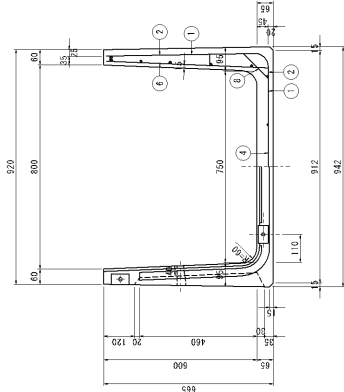

側面図

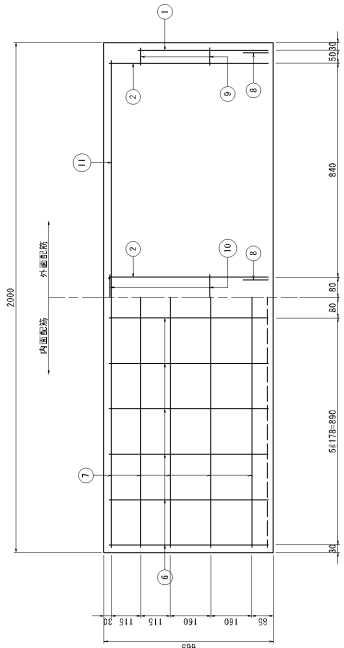


ワイドフレーム H600xB900


$$S=1:10$$

材 料 表 (一本当り)						材 質
種類	ノ 度	張 数	本 数	重 量	形 状	
軸	1	010	1960	2	2.728	—
	2	010	2720	4	4.572	U
	3	06	1960	4	1.502	—
	5	06	1060	6	1.502	—
	8	—	—	—	—	—
	8	—	460	54	—	—
	8	—	460	54	—	—
	8	—	1960	9	4.580	—
	8	010	1960	9	0.571	—
	9	54	105	8	0.053	—
	10	54	215	4	0.085	—
筋	11	010	1960	2	2.803	—
	計				20.470	
部品番号						615

材料表 (一本当り)

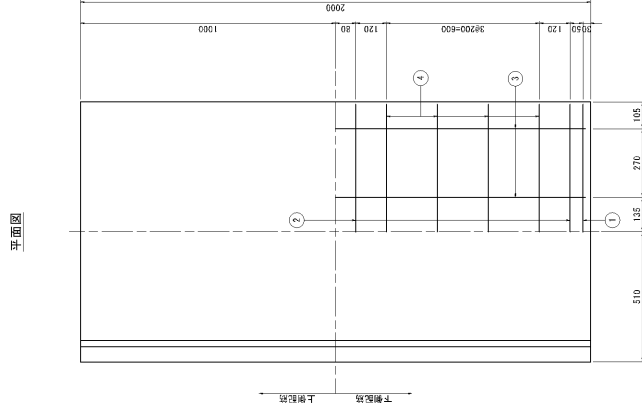

平面图

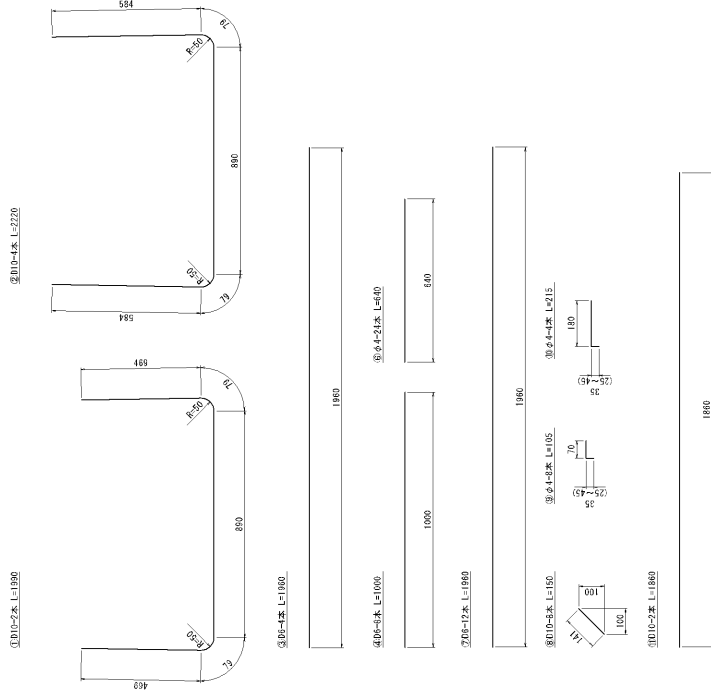

側面図



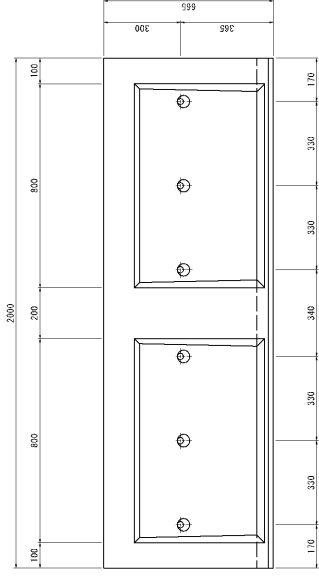


圖 10

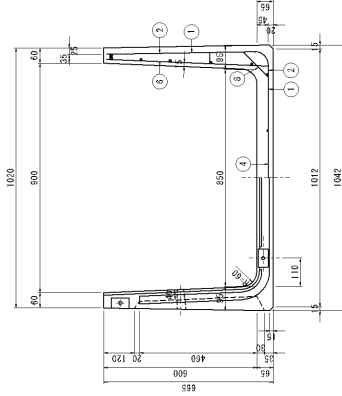


側面図

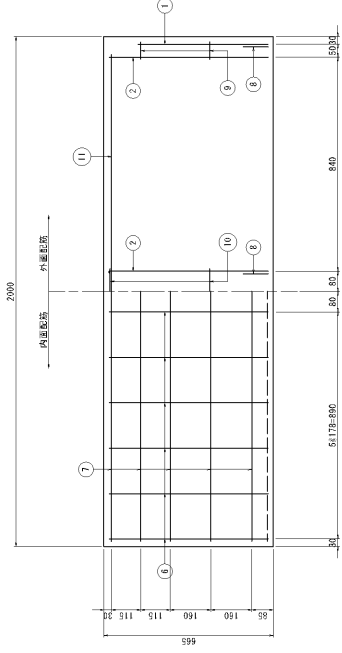


ワイドフレーム H600xB1000

3=110

鉄筋加工図

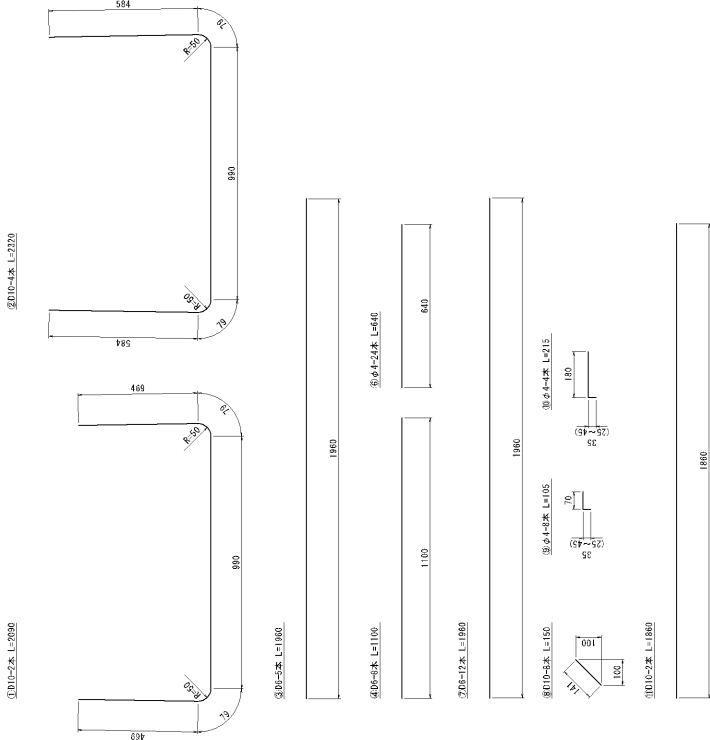


平面図

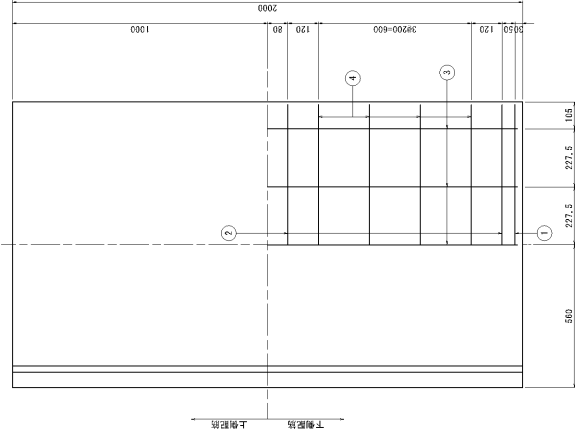


材料表 (一本当り)

種別No	役長 (mm)	本数	重量 (kg)	形状	材質
1	D10	2000	2.541	U	SD35A
2	D10	2250	4.597	U	SD35A
3	D10	1960	5.240	U	SD35A
4	D10	1100	8.291	U	SD35A
5	-	-	-	-	-
6	D6	640	1.521	U	SD35A
7	D6	1960	4.580	U	SD35A
8	D10	150	8.672	U	SD35A
9	D6	105	8.052	U	SD35A
10	D6	215	4.052	U	SD35A
11	D10	1860	2.052	U	SD35A
計			21.482		
製品重量			644	kg	


側面図

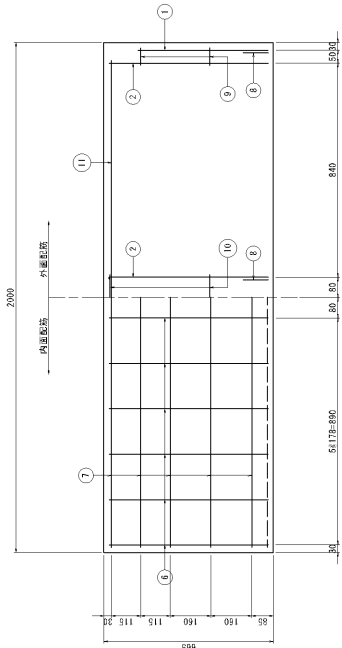

断面図

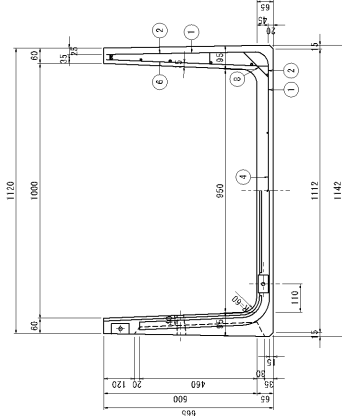

側面図

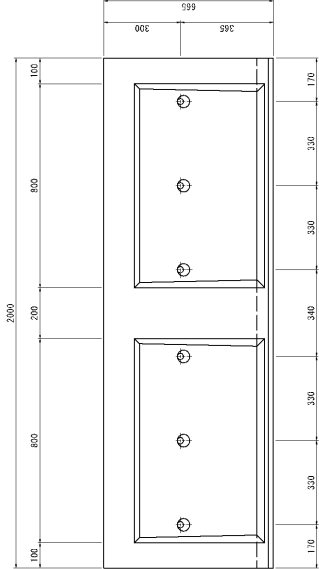


ワイドフレーム H600xB1200

2=110


鉄筋加工図

①D10-2本 L=2720

②D10-2本 L=2720

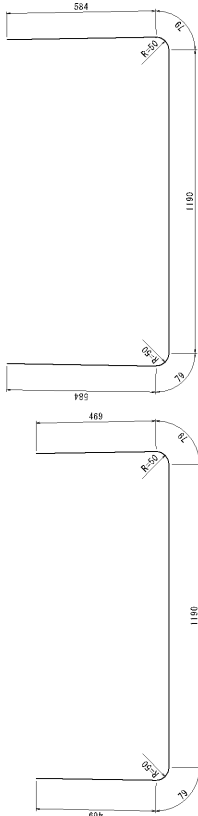


平面図

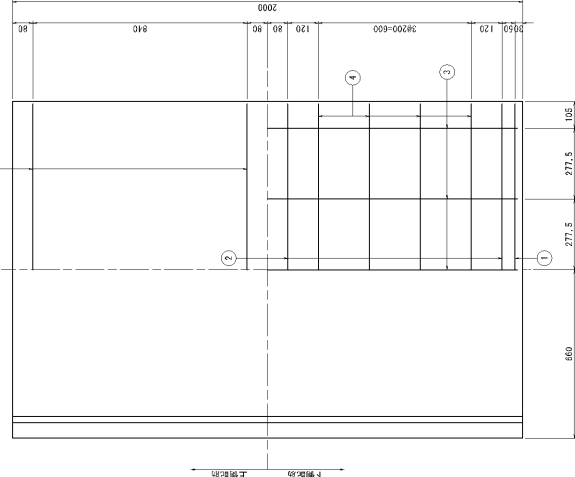


材料表 (一本当り)

種別No	役	長さ (mm)	本数	重量 (kg)	形状	材質
1	D10	2720	2	2.655	└┐	SD355A
2	D10	2520	4	5.645	└┐	SD355A
3	D6	1860	5	2.440	└┐	SD355A
4	D6	1300	8	2.590	└┐	SD355A
5	D6	1300	4	1.295	└┐	SD355A
6	φ4	640	24	1.521	└┐	SD355A
7	D6	1860	10	4.580	└┐	SD355A
8	D10	150	8	0.672	└┐	SD355A
9	φ4	105	8	0.052	└┐	SD355A
10	φ4	215	4	0.052	└┐	SD355A
11	D10	1860	2	2.052	└┐	SD355A
計						
鉄						
筋						
計					23.839	
製品重量					707	kg


側面図

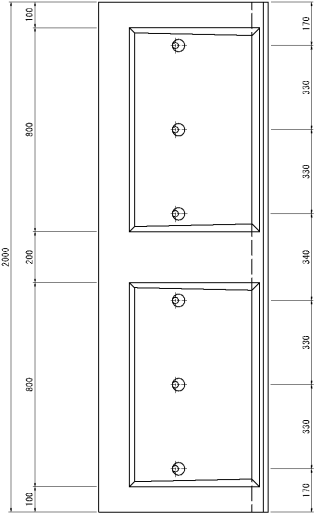

断面図

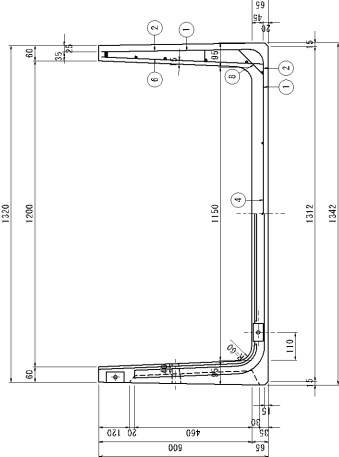


側面図

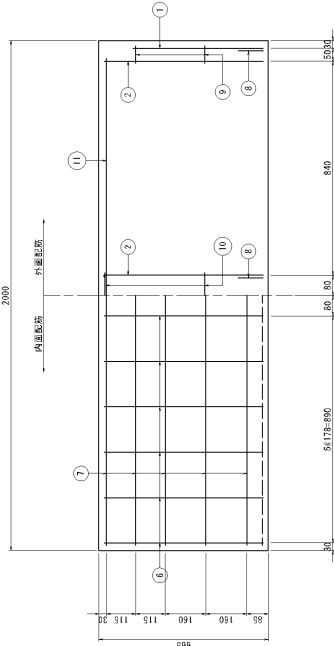






ワイドフレーム H700xB400

515

鉄筋加工図

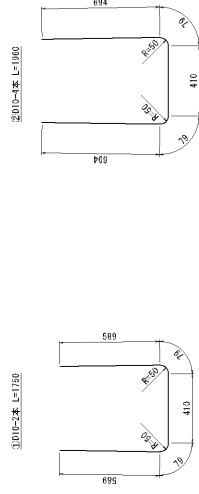

類別No	定具	式	本數(量)	形狀	材質
1	D10	1750	2	1,450	S235A
2	D10	1960	4	1,960	S235A
3	D6	1960	3	1,464	S235A
4	D6	520	8	1,038	S235A
5	—	—	—	—	—
6	φ4	750	20	1,465	S235A
7	D6	1960	10	4,660	S235A
8	D10	220	8	0,988	S235A
9	φ4	120	6	0,095	S235A
10	φ4	225	4	0,069	S235A
11	D10	1960	2	2,083	S235A
計				18,463	

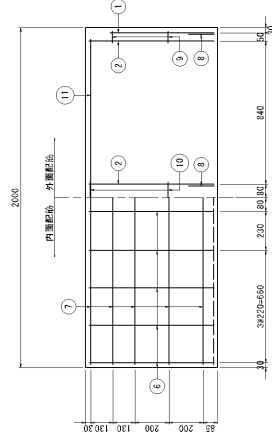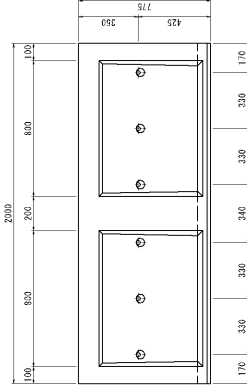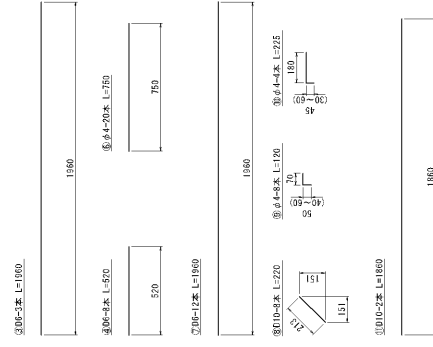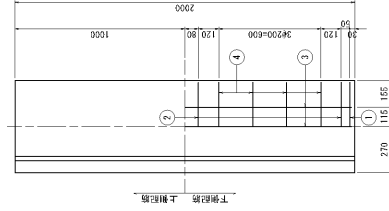

ワイドフレーム H700xB500

$$S=1:15$$

鉄筋加工図



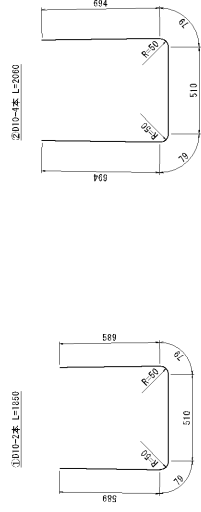



圖 恒斗

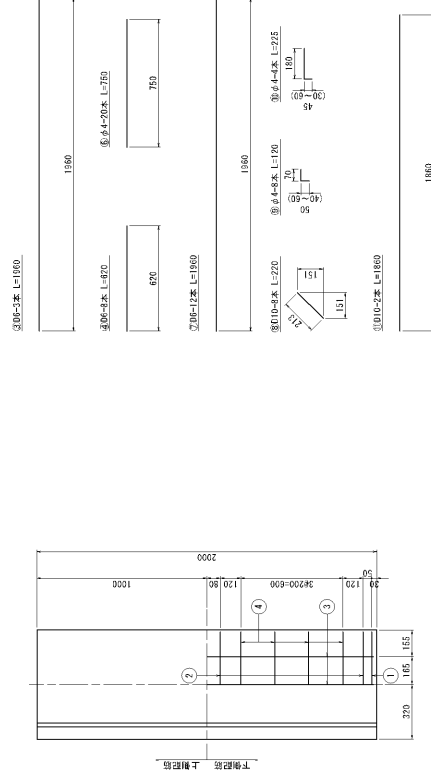


側面図

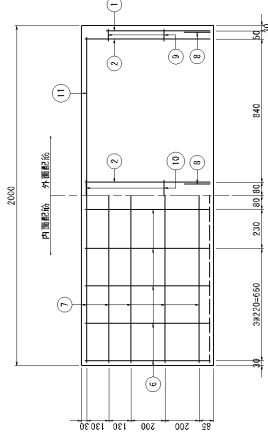

斷面図



側面図

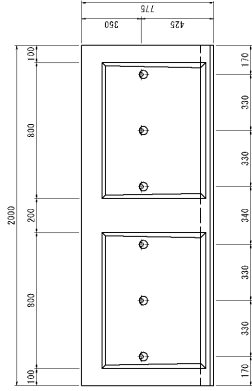

材料表 (一本当り)


類別No.	座号	本数	数量	形状	材料	
鐵	1	010	1850	2	2,072	532414
	2	010	2060	4	4,814	532414
	3	06	1960	3	1,464	532414
	4	06	620	8	1,238	532414
	5	—	—	—	—	532414
	6	54	750	20	1,485	532414
	7	06	1660	10	4,650	532414
	8	10	220	8	9,088	532414
	9	54	120	6	995	532414
	10	54	225	4	869	532414
	11	010	1680	2	2,083	532414
総計					19,093	
集計数量		621	58			

製品番号


ワイドフレーム H700xB600

515


鉄筋加工図

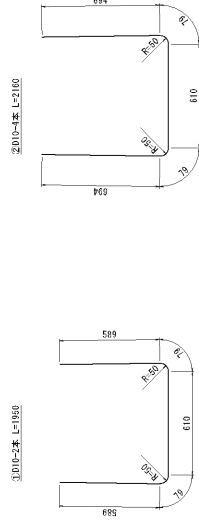


圖面平

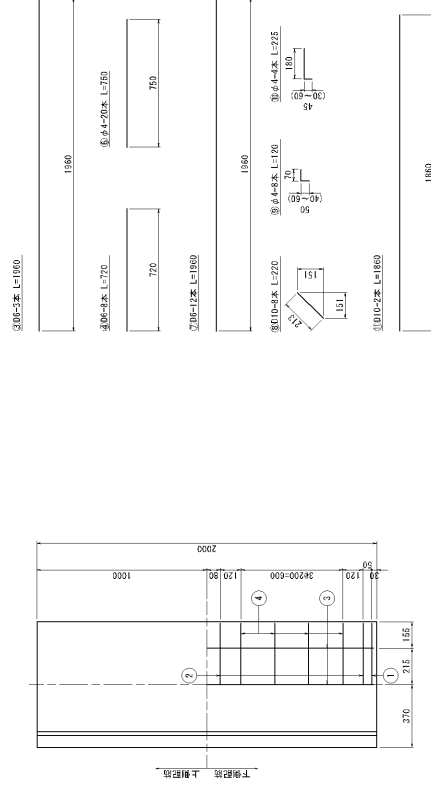


側面圖

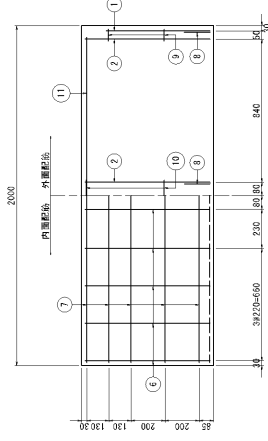

断面図



側面図

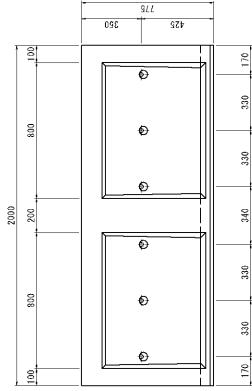

材料表 (一本当り)

類別No	座号	本数	重量 (kg)	形状	材質	
鉄	1	010	1950	2	4.184	532414
	2	010	2160	4	4.838	532414
	3	006	1960	3	1.464	532414
	4	006	720	8	1.534	532414
	5	—	—	—	—	532414
	6	54	750	20	1.485	532414
	7	006	1660	10	4.660	532414
	8	010	220	8	0.988	532414
	9	54	120	8	0.095	532414
	10	54	225	4	0.069	532414
	11	010	1660	2	2.083	532414
計				10.530		

計

10.530

鉄

11


座号

11

ワイドフリーーム H700xB800

2-115


鉄筋加工図

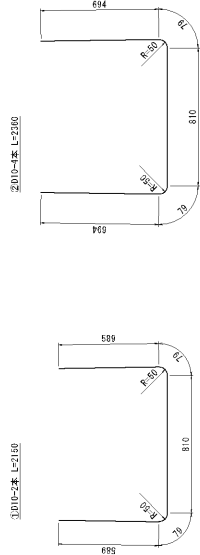

平面図

材料表 (一本当り)

種別No	径	長さ (mm)	本数 (本)	重量 (kg)	形状	材質
1	D10	2150	2	2.408	U	S3245A
2	D10	2350	4	5.286	U	S3245A
3	D6	1860	4	1.952	—	S3245A
4	D6	920	8	1.823	—	S3245A
5	—	—	—	—	—	—
6	φ4	750	20	1.465	—	S3245A
7	D6	1860	8	4.689	—	S3245A
8	D10	120	8	0.695	—	S3245A
9	φ4	120	8	0.092	—	S3245A
10	φ4	225	4	0.062	—	S3245A
11	D10	1860	2	2.063	—	S3245A
計				21.097		
製品重量				727	kg	

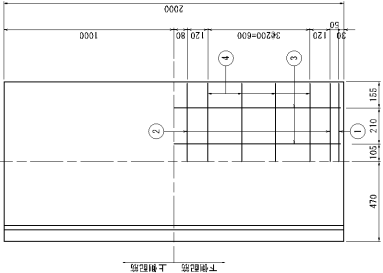


①D10-2本 L=1000



②D10-4本 L=2100



③D10-2本 L=1860




④φ4-8本 L=120




⑤D10-2本 L=1860




側面図

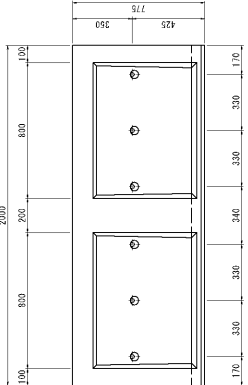

断面図




側面図

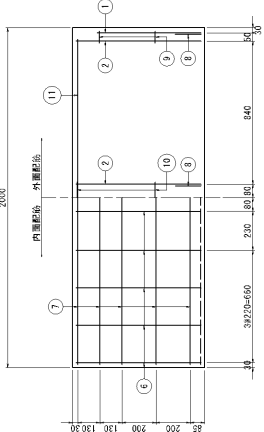


ワイドフレーム H700xB900

$$S=1:15$$

鐵筋加工圖

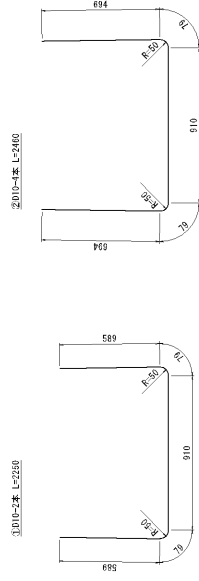


图恒斗

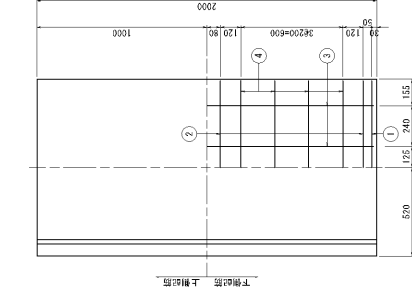


材料表 (一本当り)


類別	N	徑	量	孔	數	量	形	狀	材	質
鐵	1	D10	2750	2	2,330	—	—	—	52245A	
	2	D10	2460	4	5,510	—	—	—	52245A	
	3	D6	1960	4	1,852	—	—	—	52245A	
	4	D6	1020	8	2,032	—	—	—	52245A	
	5	—	—	—	—	—	—	—	—	
	6	5-4	750	20	1,485	—	—	—	52245A	
	7	D6	1460	10	4,050	—	—	—	52245A	
	8	D10	220	8	0,988	—	—	—	52245A	
	9	5-4	120	8	0,995	—	—	—	52245A	
	10	5-4	225	4	0,639	—	—	—	52245A	
	11	D10	1860	2	2,053	—	—	—	52245A	
總	計				21,532					
總	計				762					

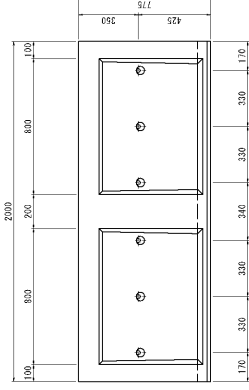

断面图




側面図

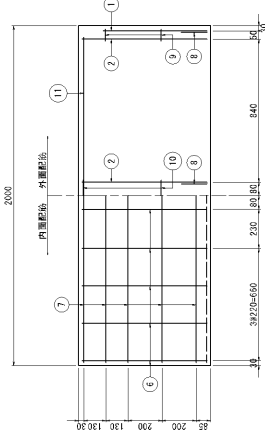

ワイドフレーム H700xB1000

2-1 15



鉄筋加工図

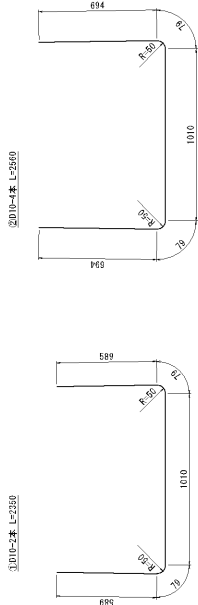


平面図

材料表 (一本当り)


種別No	径	長さ (mm)	本数 (個)	重量 (kg)	形状	材質
1	D10	2350	2	2.632	U	S3281A
2	D10	2550	4	5.734	U	S3281A
3	D6	1860	5	2.400	—	S3281A
4	D6	1120	8	2.231	—	S3281A
5	—	—	—	—	—	—
6	D4	750	20	1.465	—	S3281A
7	D6	1860	6	4.689	—	S3281A
8	D4	120	8	0.695	—	S3281A
9	D4	125	8	0.695	—	S3281A
10	D4	225	4	0.692	—	S3281A
11	D10	1860	2	2.683	—	S3281A
計				22.655		
製品重量			797	kg		

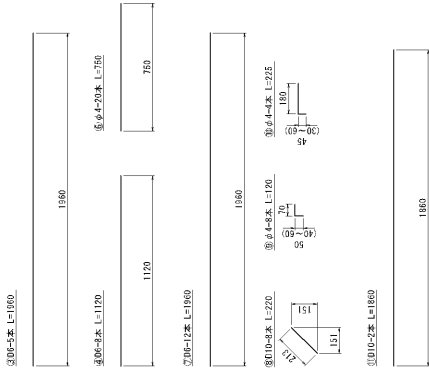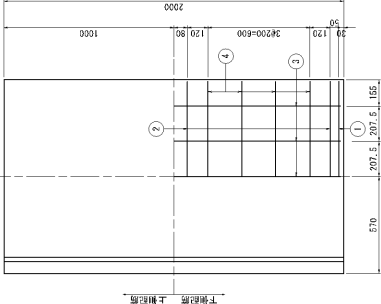


側面図

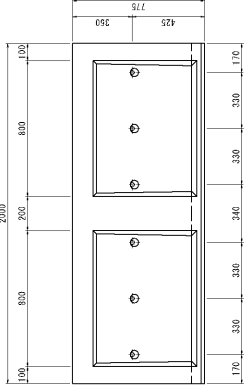

断面図




側面図

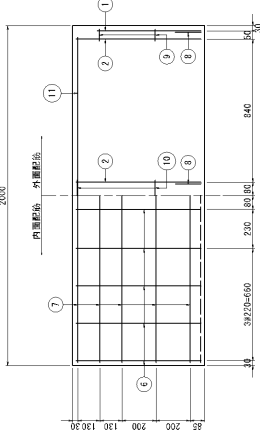

ワイドフレーム H700xB1100

2-1 15


鉄筋加工図

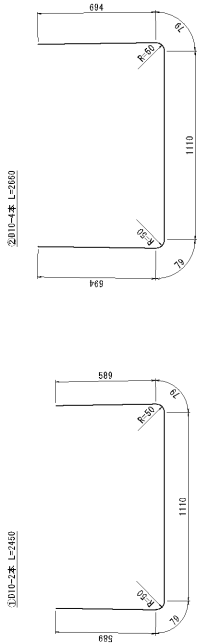

平面図


材料表 (一本当り)

種別No	径	長さ	本数	重量	形状	材質
1	Ø10	2650	2	2.744	U	S328A
2	Ø10	2650	4	5.958	U	S328A
3	Ø6	1960	5	2.400	—	S328A
4	Ø6	1220	8	2.430	—	S328A
5	—	—	—	—	—	—
6	Ø4	750	20	1.465	—	S328A
7	Ø6	1960	8	4.680	—	S328A
8	Ø4	750	8	0.605	—	S328A
9	Ø4	1220	8	0.605	—	S328A
10	Ø4	225	4	0.062	—	S328A
11	Ø10	1860	2	2.063	—	S328A
計				22.190		
製品重量			823	kg		

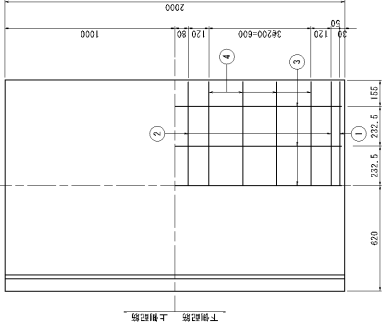


下側記号 上側記号

側面図

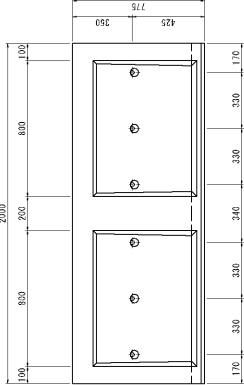


側面図

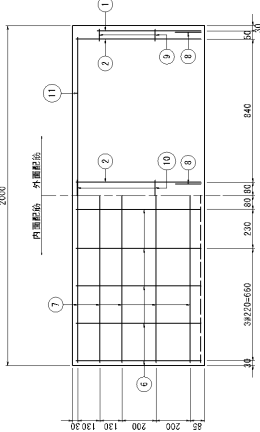


ワイドフレーム H700xB1300

2-115

鉄筋加工図

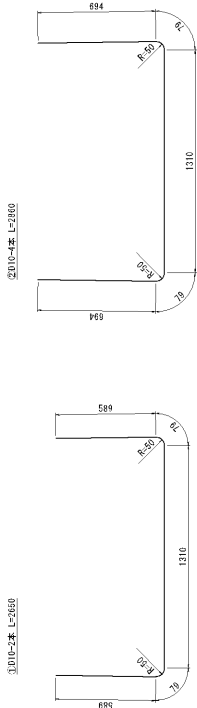


平面図

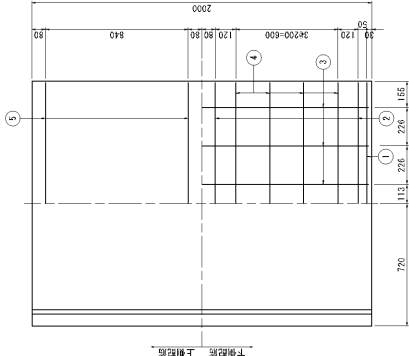


材料表 (一本当り)

種別No	径	長さ	本数	重量	形状	材質
1	100	7650	2	2.948	U	S3245A
2	100	2800	4	6.406	U	S3245A
3	106	1860	6	2.978	—	S3245A
4	106	1420	8	2.479	—	S3245A
5	106	1420	4	1.414	—	S3245A
6	106	750	20	1.465	—	S3245A
7	106	1860	10	4.689	—	S3245A
8	106	130	8	0.695	—	S3245A
9	54	130	8	0.095	—	S3245A
10	54	225	4	0.062	—	S3245A
11	100	1860	2	2.063	—	S3245A
計				26.162		
製品重量			933	kg		


側面図

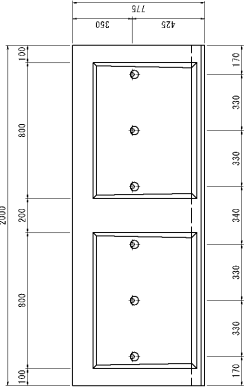

断面図

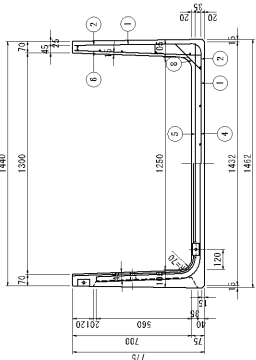


側面図

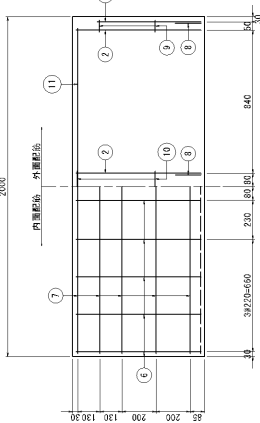

ワイドフレーム H700xB1400


2-115

鉄筋加工図

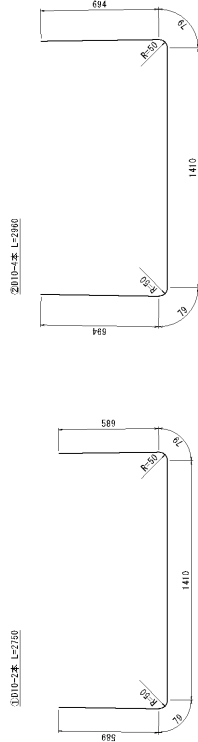


材料表 (一本当り)


種別No	径	長さ	本数	重量	形状	材質
1	D10	2750	2	3.060	U	S328YA
2	D10	2950	4	6.830	U	S328YA
3	D6	1860	6	2.978	U	S328YA
4	D6	1520	8	3.078	U	S328YA
5	D6	1520	4	1.514	U	S328YA
6	D4	750	20	1.485	U	S328YA
7	D6	1860	8	4.680	U	S328YA
8	D4	120	8	0.295	U	S328YA
9	D4	120	8	0.295	U	S328YA
10	D4	225	4	0.082	U	S328YA
11	D10	1860	2	2.083	U	S328YA
						筋
						鉄
						製品重量
				938 kg		
				25.783		

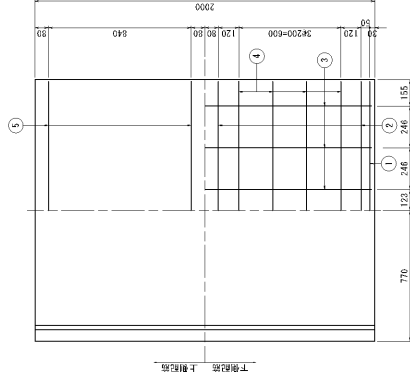


側面図

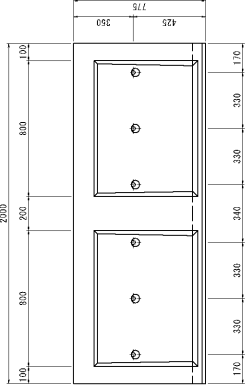

断面図

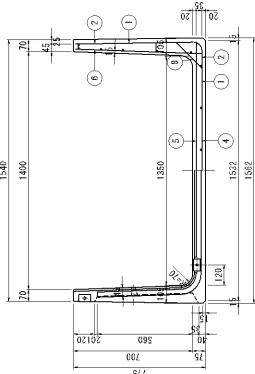

側面図

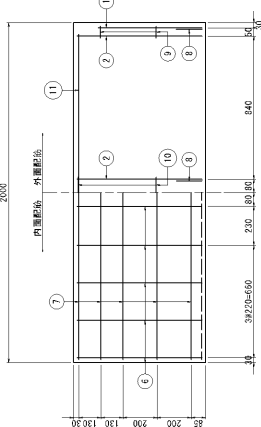


ワイドフリーム H800xB500

2-1 15


材料表 (一本当り)

種別	No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
鉄	1	D13	1900	2	3.781	53HSA
	2	D13	2220	4	8.836	53HSA
	3	D6	1900	3	1.464	53HSA
	4	D6	650	8	1.295	53HSA
	5	-	-	-	-	-
鉄	6	φ4	640	20	1.663	53HSA
	7	D6	1900	10	4.880	53HSA
	8	D10	220	8	0.396	53HSA
	9	φ4	120	12	0.143	53HSA
	10	φ4	230	6	0.137	53HSA
防	11	D10	1660	2	2.083	53HSA
計				25.268		
製品重量				731 kg		


平面図

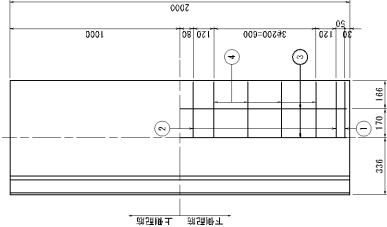


鉄筋加工図

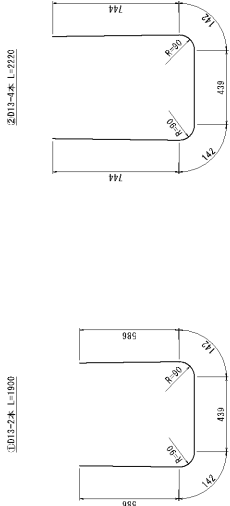


前面図

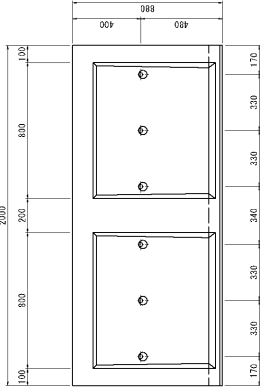

断面図



側面図

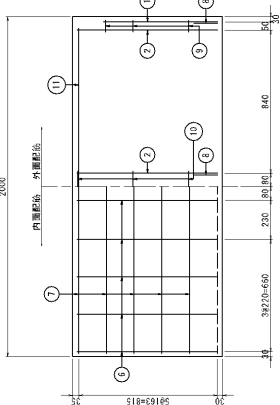



ワイドフリー ム H800xB600

2-1 15


材料表 (一本当り)

種別No	径寸 (mm)	本数	重量 (kg)	形状	材質	
1	D13	2000	2	3.960	—	S315FA
2	D13	2320	4	9.234	—	S315FA
3	D6	1660	3	1.464	—	S315FA
4	D6	750	8	1.464	—	S315FA
5	—	—	—	—	—	—
6	φ4	640	20	1.653	—	S315FA
7	D6	1660	10	4.880	—	S315FA
8	D10	220	8	0.395	—	S315FA
9	φ4	120	12	0.143	—	S315FA
10	φ4	230	6	0.137	—	S315FA
11	D10	1660	2	2.083	—	S315FA
計						
計				76.942		
製品重量			76.9 kg			


平面図

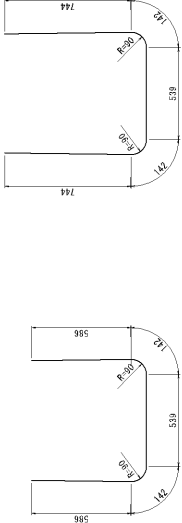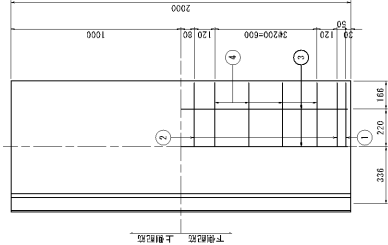


側面図

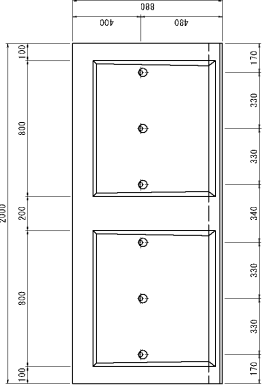

断面図



側面図

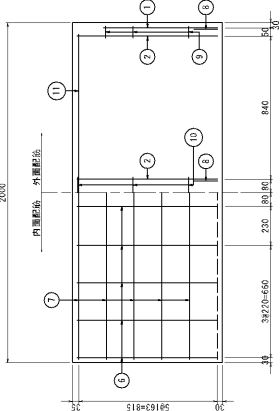


ワイドフリーム H800xB700

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2100	2	—	53HSLA
2	D13	2420	4	—	53HSLA
3	D6	1660	3	—	53HSLA
4	D6	650	8	—	53HSLA
5	—	—	—	—	—
6	φ4	640	20	—	53HSLA
7	D6	1660	10	—	53HSLA
8	D10	220	8	—	53HSLA
9	φ4	120	12	—	53HSLA
10	φ4	230	6	—	53HSLA
11	D10	1660	2	—	53HSLA
計					
計点数量			26.860		


平面図

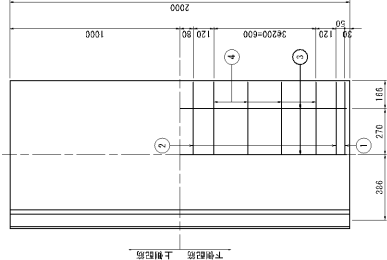


鉄筋加工図

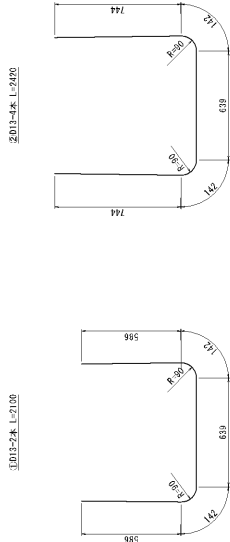


前面図

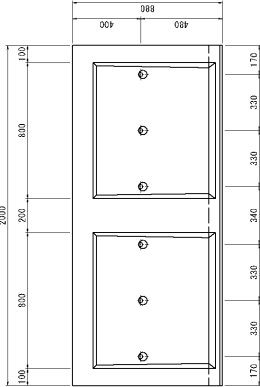

断面図



側面図

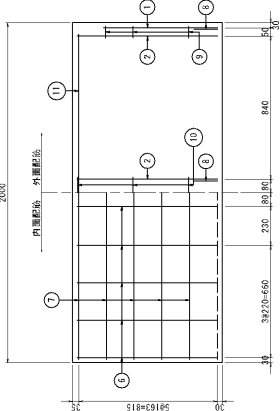


ワイドフリーム H800xB800

2-1 15


材料表 (一本当り)

種別	No	径 (mm)	長さ (mm)	本数 (kg)	重量 (kg)	形状	材質
鉄	1	D13	2200	2	4.378	┐┐	S315FA
	2	D13	2520	4	10.009	┐┐	S315FA
	3	D6	1660	4	1.952	┐┐	S315FA
	4	D6	650	8	1.892	┐┐	S315FA
	5	-	-	-	-	┐┐	-
鉄	6	φ4	640	20	1.653	┐┐	S315FA
	7	D6	1660	10	4.880	┐┐	S315FA
	8	D10	220	8	0.395	┐┐	S315FA
	9	φ4	120	12	0.143	┐┐	S315FA
	10	φ4	230	6	0.137	┐┐	S315FA
	11	D10	1660	2	2.083	┐┐	S315FA
	12	-	-	-	-	┐┐	-
粘	13	-	-	-	-	┐┐	-
	14	-	-	-	-	┐┐	-
計				28.144			
製品重量				844	kg		


平面図

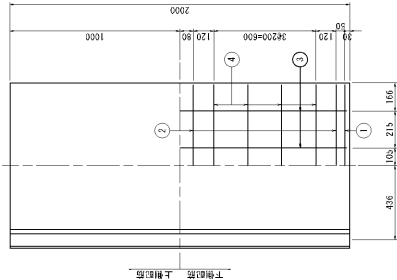


鉄筋加工図

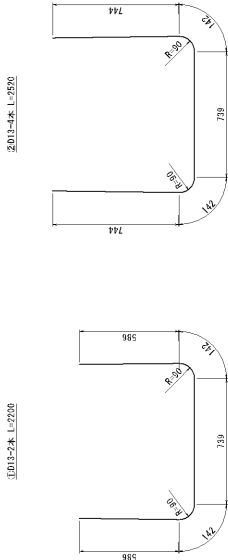


側面図

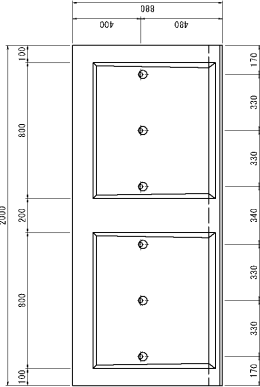

断面図



側面図



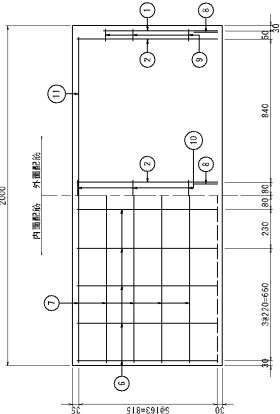


ワイドフレーム H800xB900


515

材料表 (一本当り)


類別	N.O.	徑 mm	七 字	本 體 重 量 (kg)	形 狀	材 質
1	D13	2000	2	4.577	—	SJ94FA
2	D12	2620	4	10.428	U	SJ94FA
3	B6	1660	4	1.552	—	SJ94FA
4	B6	1050	8	2.092	—	SJ94FA
5	—	—	—	—	—	SJ94FA
6	G4	640	20	1.453	—	SJ94FA
7	B6	1660	10	4.890	—	SJ24FA
8	D10	220	8	0.580	—	SJ24FA
9	G4	120	12	0.143	—	SJ24FA
10	G4	230	6	0.327	—	SJ24FA
11	D10	1660	2	2.083	—	SJ41FA
注				28.941		
總計			822	kg		

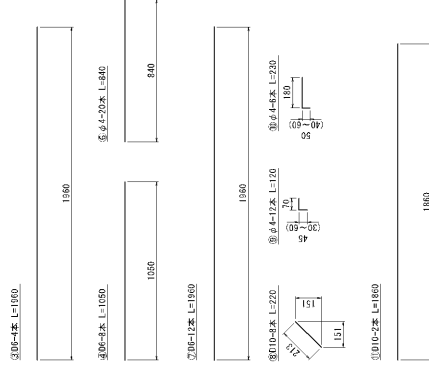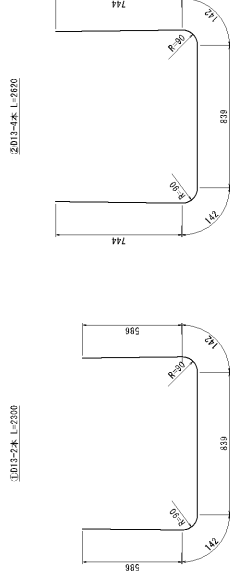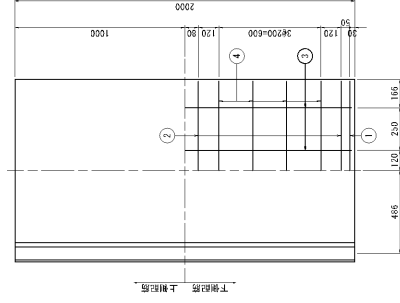


側面図

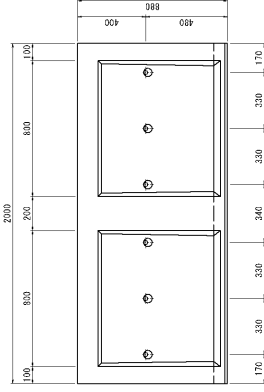

断面图



侧面图

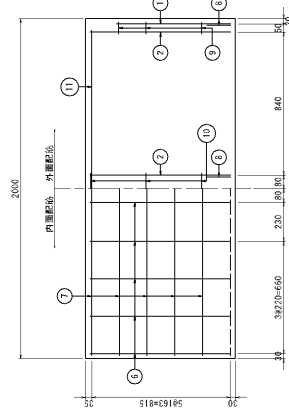


ワイドフレーム H800xB1000

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2400	2	U	S355A
2	D13	2720	4	U	S355A
3	D6	1660	4	—	S355A
4	D6	1150	8	—	S355A
5	—	—	—	—	—
6	φ4	640	20	—	S355A
7	D6	1660	10	—	S355A
8	D10	2720	8	—	S355A
9	φ4	120	12	—	S355A
10	φ4	230	6	—	S355A
11	D10	1660	2	—	S355A
計			28.737		
部品数量				919 kg	


平面図

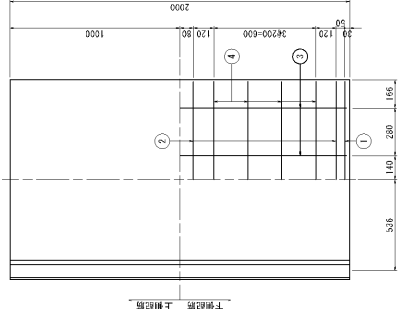


鉄筋加工図

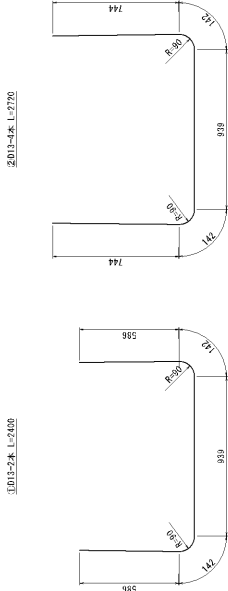


側面図

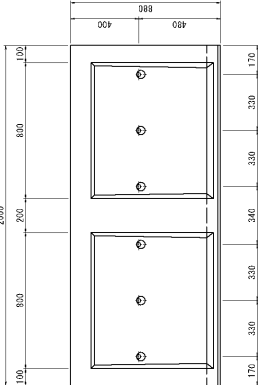

断面図



側面図

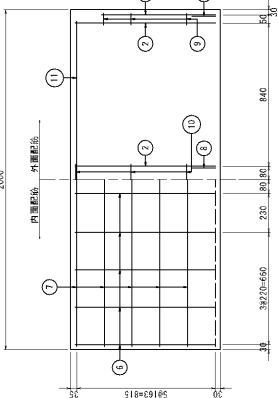


ワイドフレーム H800xB1100

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2500	2	—	S315A
2	D13	2820	4	—	S315A
3	D6	1660	5	—	S315A
4	D6	1250	8	—	S315A
5	—	—	—	—	—
6	φ4	640	20	—	S315A
7	D6	1660	10	—	S315A
8	D10	220	8	—	S315A
9	φ4	120	12	—	S315A
10	φ4	230	6	—	S315A
11	D10	1660	2	—	S315A
計			31.021		
製品重量			957 kg		


平面図

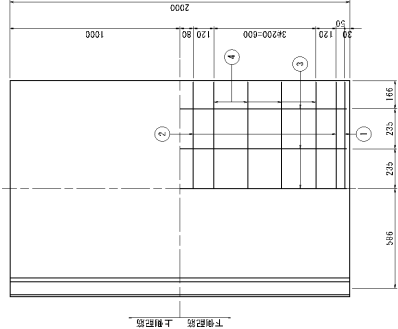


鉄筋加工図

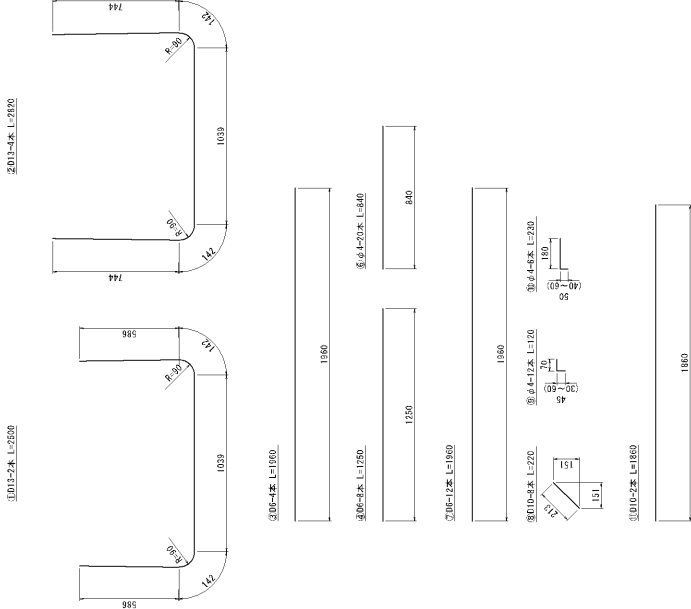


前面図

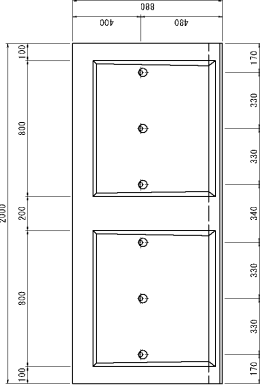

断面図



側面図

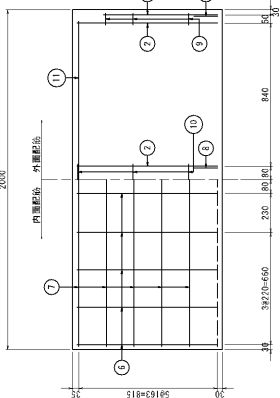


ワイドフレーム H800xB1200

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2600	2	—	S355A
2	D13	2920	4	—	S355A
3	D6	1660	5	—	S355A
4	D6	1350	8	—	S355A
5	—	—	—	—	—
6	φ4	640	20	—	S355A
7	D6	1660	10	—	S355A
8	D10	220	8	—	S355A
9	φ4	120	12	—	S355A
10	φ4	230	6	—	S355A
11	D10	1660	2	—	S355A
計					
計			31.817		
部品数量			934 kg		

平面図

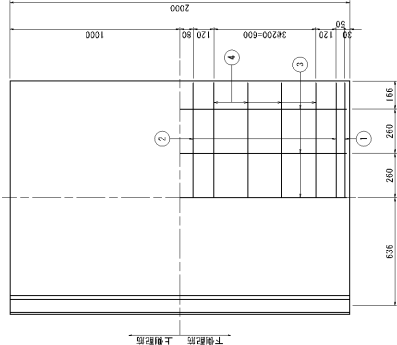

鋳造加工図

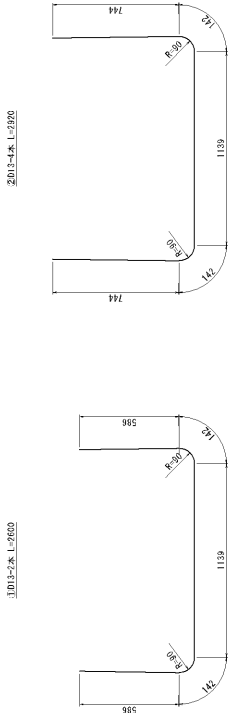

①D13-2本 L=1660



2004-20本 L=840




②D10-2本 L=1660




③D10-2本 L=220




④D10-2本 L=1660




側面図

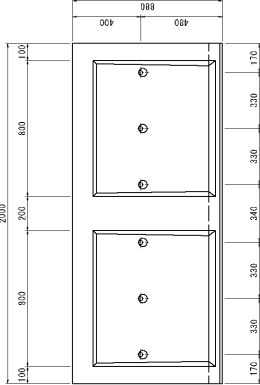

断面図

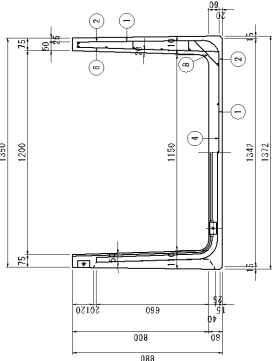

側面図

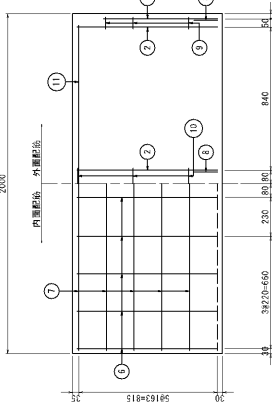


ワイドフレーム H800xB1300

2-1 15

材料表 (一本当り)


種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2700	2	U	53HSLA
2	D13	3020	4	U	53HSLA
3	D6	1660	5	—	53HSLA
4	D6	1450	8	—	53HSLA
5	D6	1450	4	—	SP295A
6	φ4	640	20	—	53HSLA
7	D6	1660	10	—	53HSLA
8	D10	220	8	—	53HSLA
9	φ4	120	12	—	53HSLA
10	φ4	230	6	—	53HSLA
11	D10	1660	2	—	53HSLA
計					
部品重量			1032 kg		
			34.057		

平面図

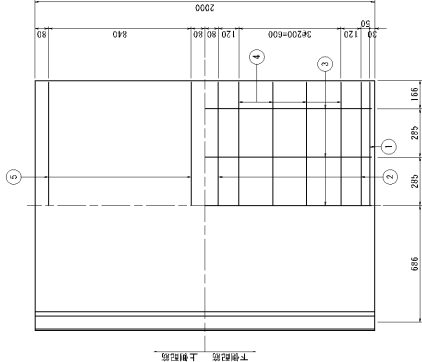


下部配置 上部配置

端加工図

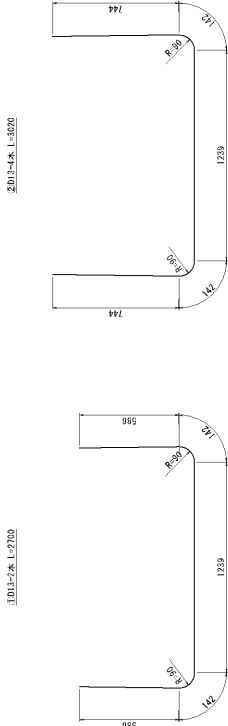

①D13-2本 L=1660




②D6-4本 L=1450




③D6-2本 L=1450




④D10-2本 L=220




⑤D10-2本 L=1660




側面図

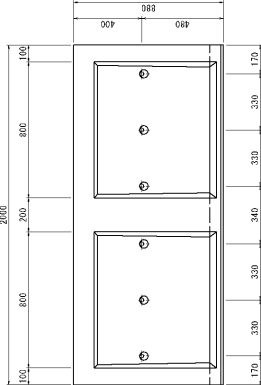

断面図

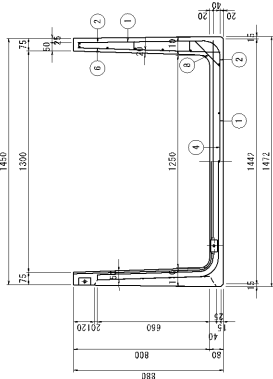

側面図

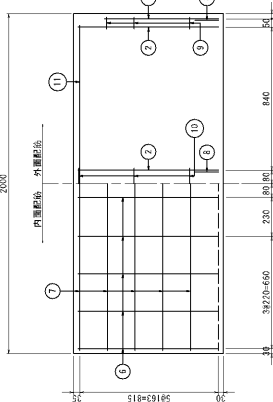


ワイドフレーム H800xB1400

2-1 15


材料表 (一本当り)

種別	N.0	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	2900	2	5.572	□	Sr235A
	2	D13	3120	4	12.418	□	Sr235A
	3	D6	1980	6	2.928	—	Sr235A
	4	D6	1550	8	2.068	—	Sr235A
	5	D6	1550	4	1.544	—	Sr235A
	6	φ4	840	20	1.663	—	Sr235A
鉄	7	D6	1980	10	4.880	—	Sr235A
	8	D10	220	8	0.666	—	Sr235A
	9	φ4	120	12	0.143	—	Sr235A
	10	φ4	230	6	0.137	—	Sr235A
	11	D10	1980	2	2.083	—	Sr235A
						—	
鋁						—	
						—	
計					35.442		
重量質量				1000	kg		


平面図

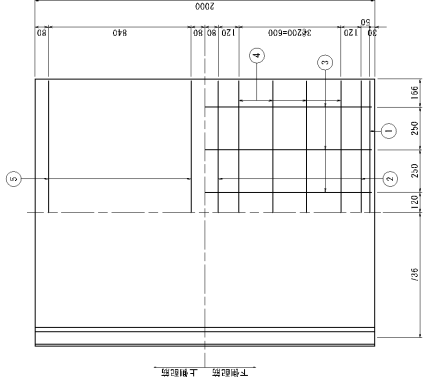


鋳造加工図

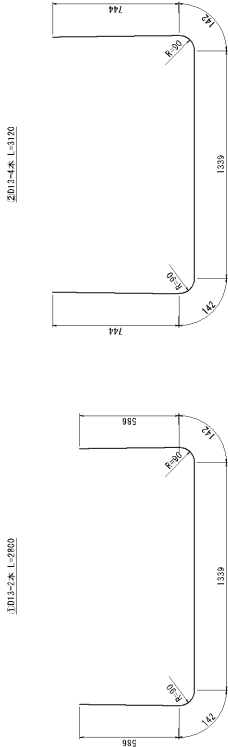


側面図

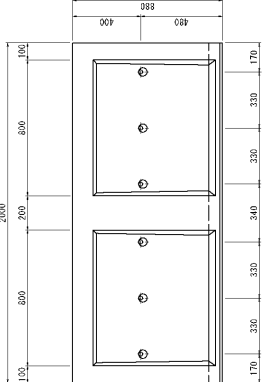

断面図

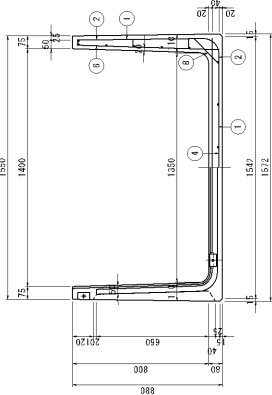

側面図

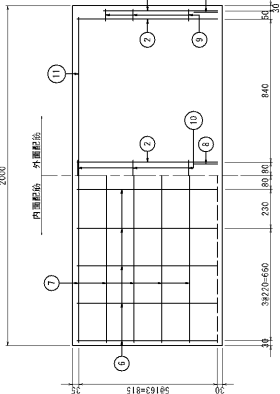


ワイドフレーム H800xB1500

2-1 15

材料表 (一本当り)


種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D13	2900	2	5.771	┐	SUS304
2	D13	3220	4	12.815	┐	SUS304
3	D6	1980	6	2.928	┐	SUS304
4	D6	1650	8	2.267	┐	SUS304
5	D6	1650	4	1.643	┐	SUS304
6	φ4	840	20	1.663	┐	SUS304
7	D6	1980	10	4.889	┐	SUS304
8	D10	220	8	0.666	┐	SUS304
9	φ4	120	12	0.142	┐	SUS304
10	φ4	230	6	0.137	┐	SUS304
11	D10	1980	2	2.083	┐	SUS304
計				35.337		
重量				1107 kg		

平面図

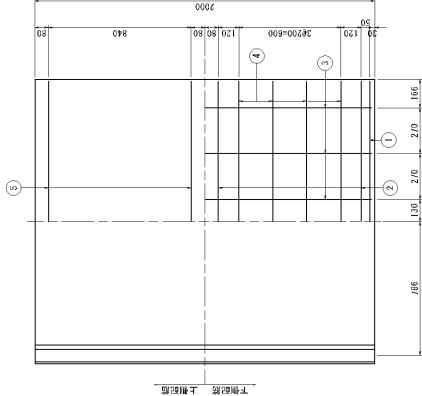

下側記号 上側記号

鋳造加工図

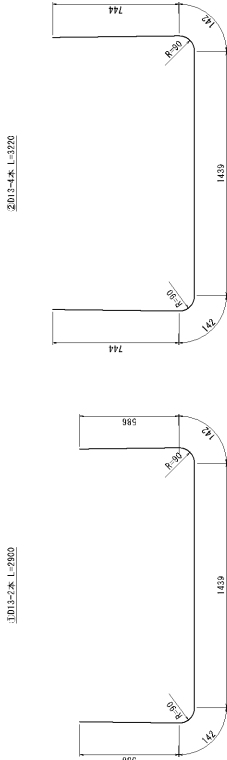

②013-2本 L=1980

②013-4本 L=1980

②013-4本 L=1650

②013-4本 L=1650

②013-2本 L=1980

②013-4本 L=1980


②013-2本 L=220

②013-4本 L=220


②013-2本 L=1980

②013-4本 L=1980

側面図

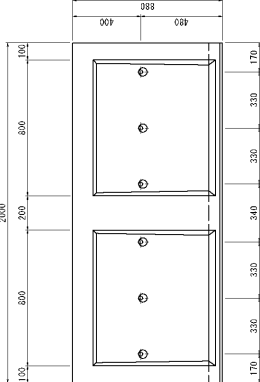

側面図

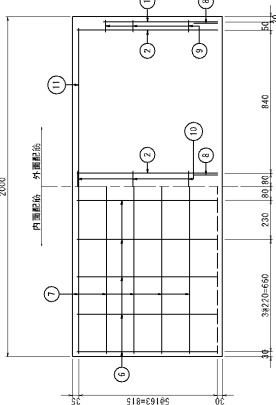


ワイドフレーム H800xB1600

2-1 15


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D13	3000	2	5.970	┐	SUS304
2	D13	3320	4	13.214	┐	SUS304
3	D6	1980	6	2.928	—	SUS304
4	D6	1750	8	3.466	—	SUS304
5	D6	1750	4	1.743	—	SUS304
6	φ4	940	20	1.663	—	SUS304
7	D6	1980	10	4.880	—	SUS304
8	D10	220	8	0.666	—	SUS304
9	φ4	120	12	0.143	—	SUS304
10	φ4	230	6	0.137	—	SUS304
11	D10	1980	2	2.083	—	SUS304
計				37.233		
重量				1145	kg	


平面図

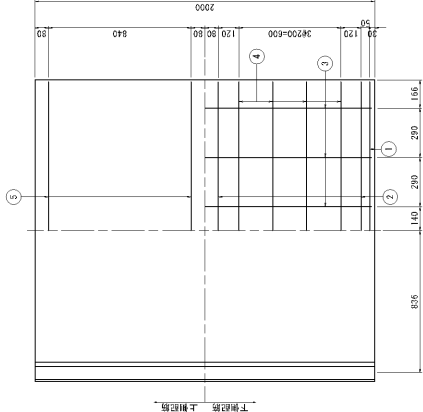


鋳造加工図

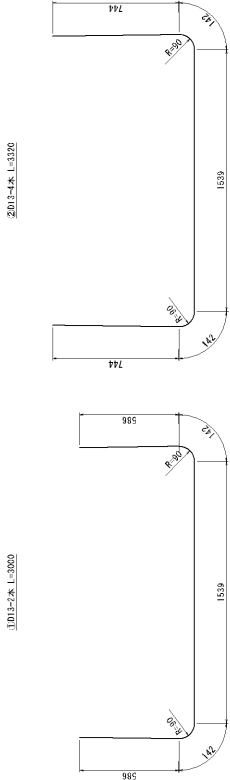


鋳造加工図

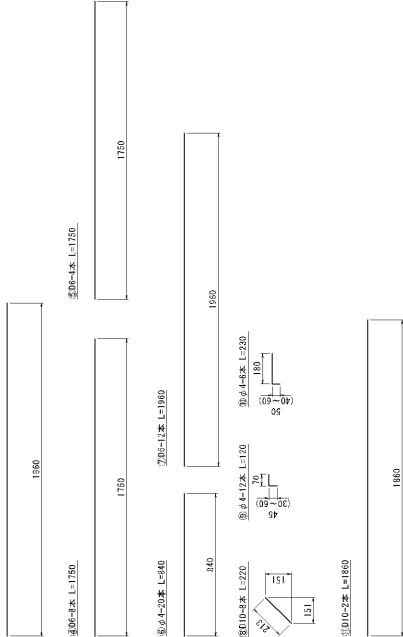


側面図

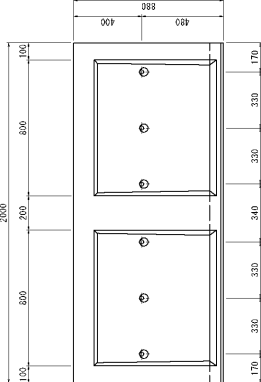

断面図

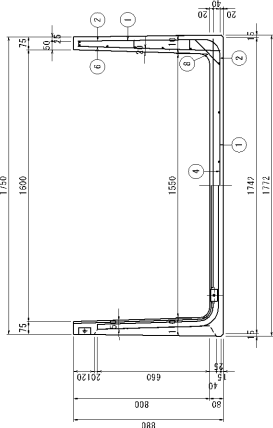

側面図

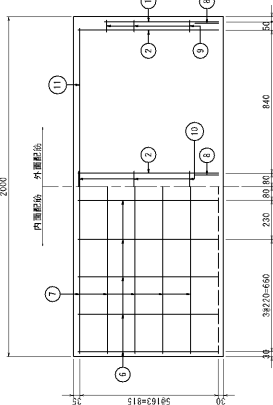


ワイドフリー ユーム H900xB600

2-115


材料表 (一本当り)

種別No	径 寸 (mm)	本数	重量 (kg)	型 式	材 質	
1	D13	200	2	4.378	U	S315FA
2	D13	2500	4	10.149	U	S315FA
3	D6	1660	3	1.464	—	S315FA
4	D6	760	8	1.514	—	S315FA
5	—	—	—	—	—	—
6	φ4	640	20	1.861	—	S315FA
7	D6	1660	12	5.856	—	S315FA
8	D10	260	8	1.165	—	S315FA
9	φ4	130	12	0.154	—	S315FA
10	φ4	230	6	0.127	—	S315FA
11	D10	1660	2	2.083	—	S315FA
計						
計						28.791
製品重量		954	kg			


平面図

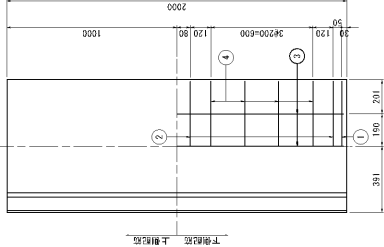


鉄筋加工図

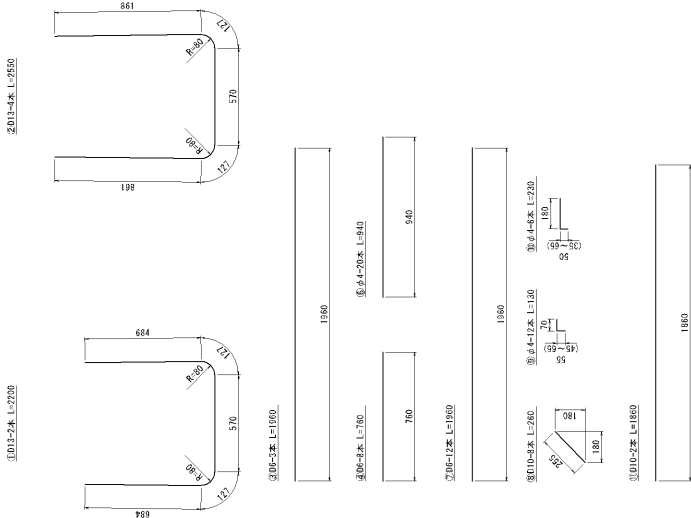

前面図

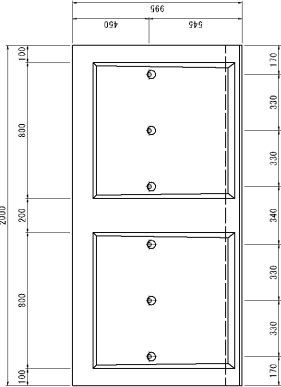

側面図

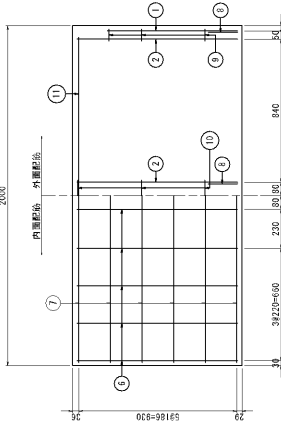


ワイドフレーム H900xB700

$$S=1:15$$


材料表 (一本当り)

標別No	径	七 本 長 (mm)	七 本 量 (kg)	沙	材
1	D13	2300	2, 537	—	33945A
2	D13	2650	4, 054 ¹⁾	—	33945A
3	D6	1660	3, 184	—	33945A
4	D6	660	1, 713	—	33945A
5	—	—	—	—	33945A
6	φ 44	440	2, 181	—	33945A
7	D6	1660	12, 556	—	33241A
8	D10	260	8, 165	—	33241A
9	φ 44	130	12, 034	—	33241A
10	φ 44	260	9, 537	—	33943A
11	D10	1660	2, 263	—	33943A
計			78, 557		
品質管理	999	検			


圖 恒斗

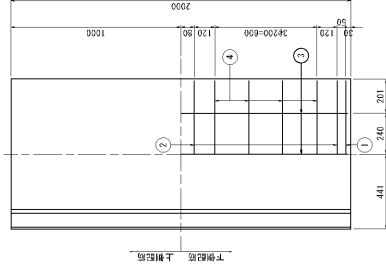


側面図

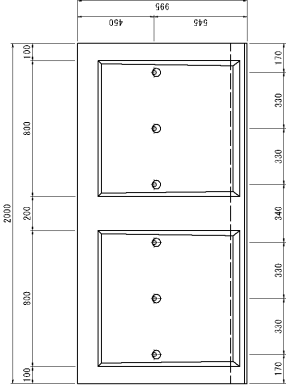


断面図



側面図

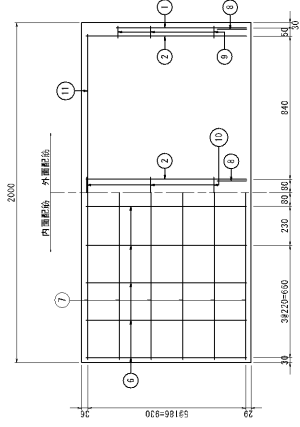

鐵筋加工圖

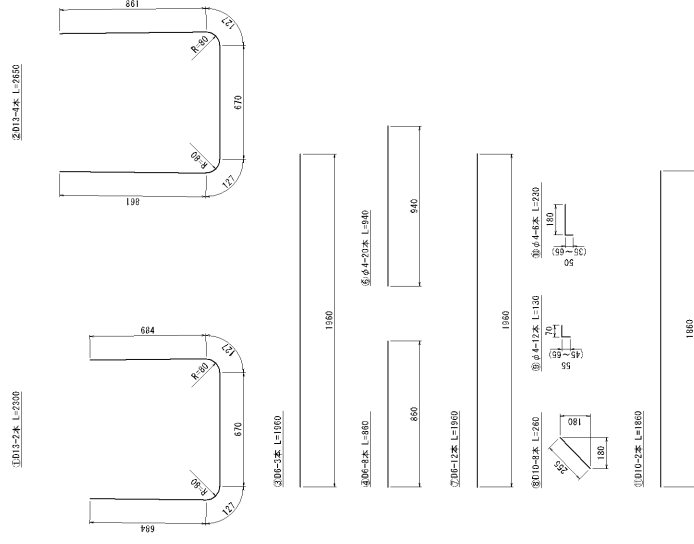


ワイドフリーム H900xB800

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2400	2	U	S315FA
2	D13	2750	4	U	S315FA
3	D6	1660	4	—	S315FA
4	D6	600	8	—	S315FA
5	—	—	—	—	—
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			30.841		
部品数量		1044 kg			


平面図

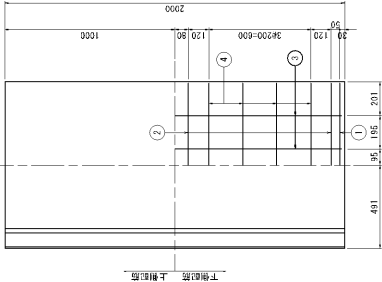


鉄筋加工図

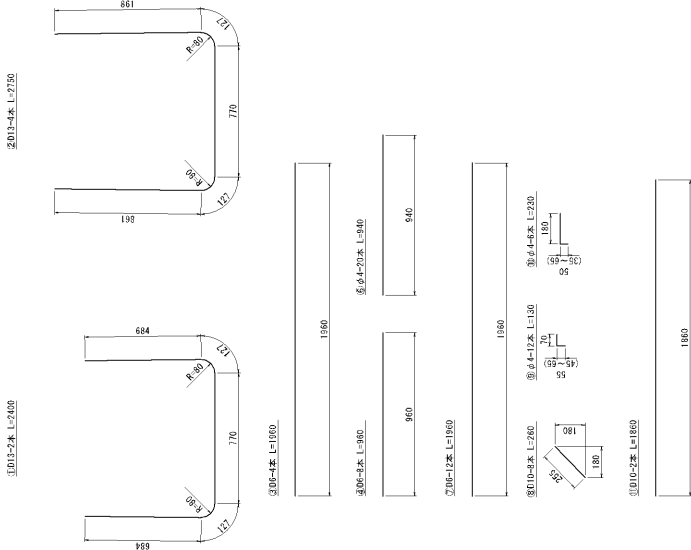


側面図

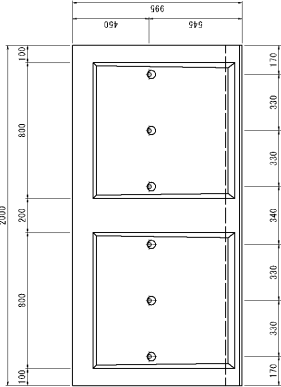

断面図



側面図

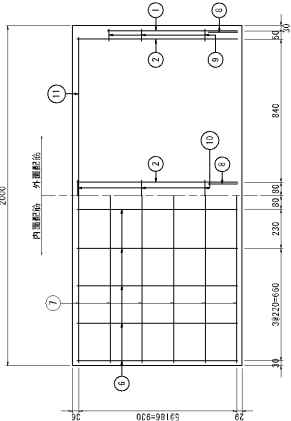


ワイドフレーム H900xB1100

2-1 15

材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2700	2	U	S315FA
2	D13	3050	4	U	S315FA
3	D6	1660	5	—	S315FA
4	D6	1200	8	—	S315FA
5	—	—	—	—	—
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			33.715		
部品数量			1177 kg		

平面図

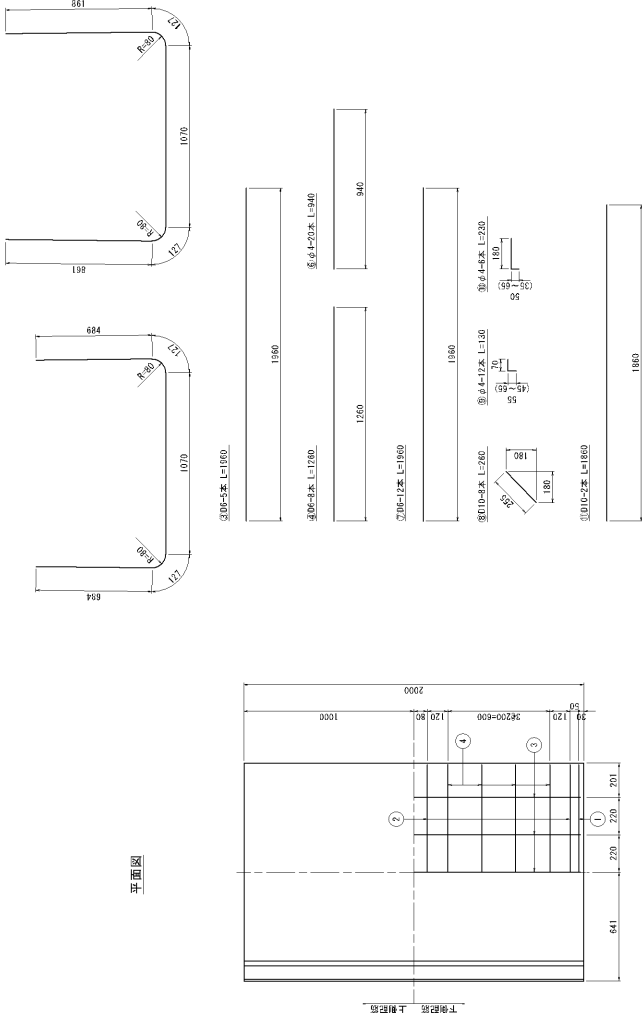


鉄筋加工図


201-2本 L=2700

201-4本 L=950

側面図

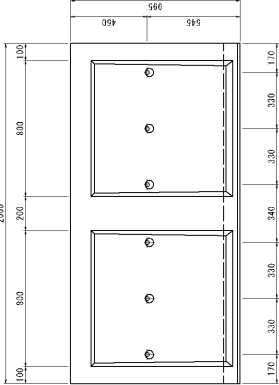

側面図

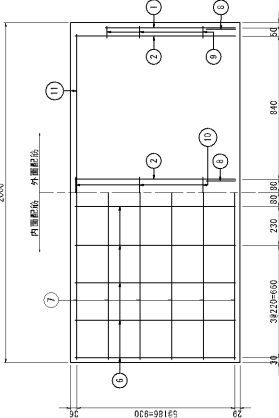


ワイドフレーム H900xB1200

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2800	2	U	S315FA
2	D13	3150	4	U	S315FA
3	D6	1660	5	—	S315FA
4	D6	1300	8	—	S315FA
5	—	—	—	—	—
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			34.514		
部品数量		1222 kg			


平面図

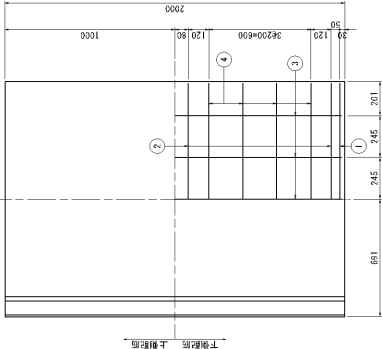


鉄筋加工図

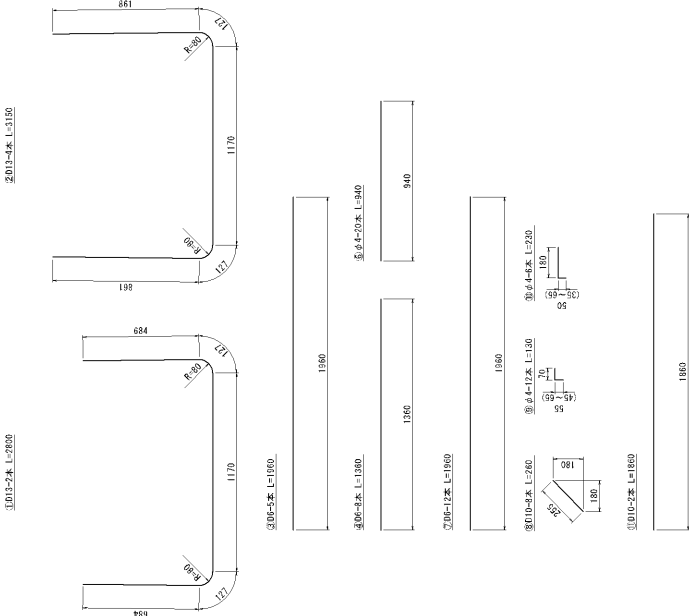


側面図

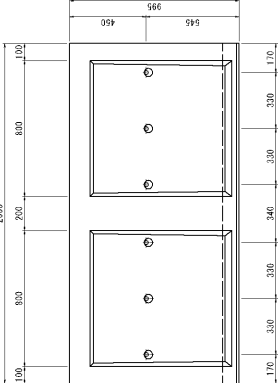

断面図

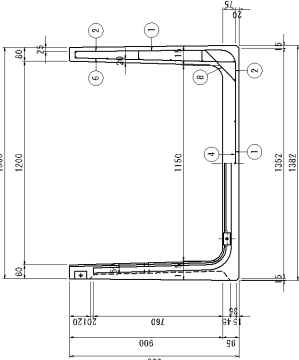

側面図

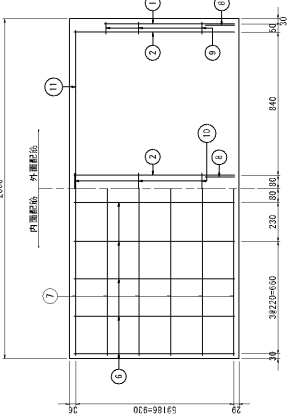


ワイドフレーム H900xB1300

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (本)	重量 (kg)	形状	材質
1	D13	2500	2	5.771	U	S315FA
2	D13	3250	4	12.935	U	S315FA
3	D6	1660	5	2.440	—	S315FA
4	D6	1460	8	2.906	—	S315FA
5	—	—	—	—	—	—
6	φ4	640	20	1.861	—	S315FA
7	D6	1660	12	5.856	—	S315FA
8	D10	260	8	1.165	—	S315FA
9	φ4	130	12	0.154	—	S315FA
10	φ4	230	6	0.137	—	S315FA
11	D10	1660	2	2.083	—	S315FA
鉄						
粘						
計				35.310		
製品重量				1257 kg		


平面図

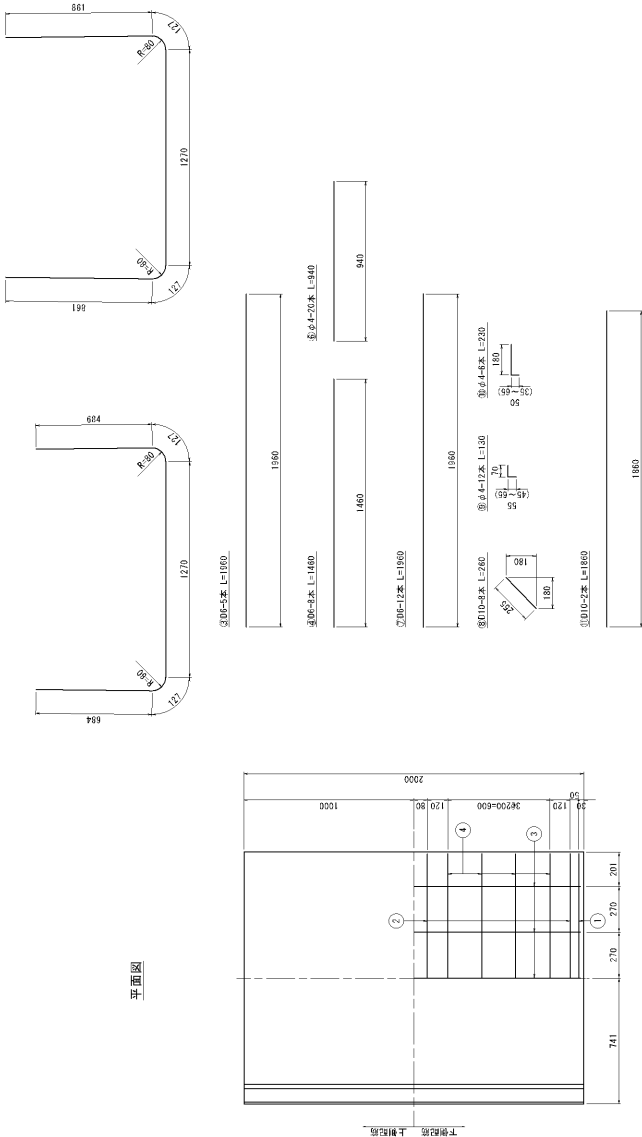


側面図

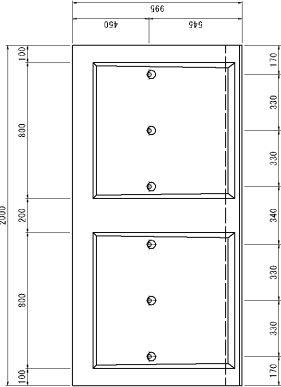

断面図

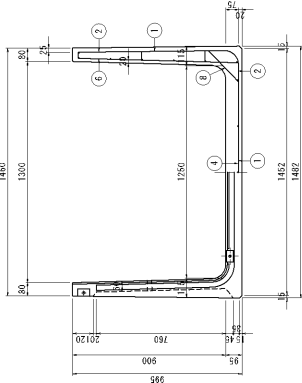


側面図

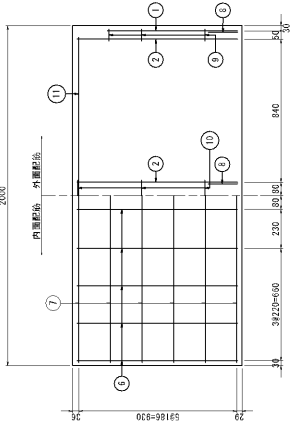

鉄筋加工図


①D13-2本 L=2500

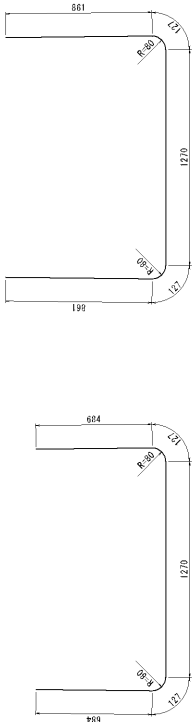


②D6-4本 L=1660




③D6-4本 L=1460




④D6-12本 L=1660



⑤D10-2本 L=260



⑥D6-2本 L=1660




ワイドフレーム H900xB1500

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	3100	2	U	53HSLA
2	D13	3450	4	U	53HSLA
3	D6	1660	6	—	53HSLA
4	D6	1660	8	—	53HSLA
5	—	—	—	—	—
6	φ4	640	20	—	53HSLA
7	D6	1660	12	—	53HSLA
8	D10	260	8	—	53HSLA
9	φ4	130	12	—	53HSLA
10	φ4	230	6	—	53HSLA
11	D10	1660	2	—	53HSLA
計			37.391		
製品重量			1356 kg		


平面図

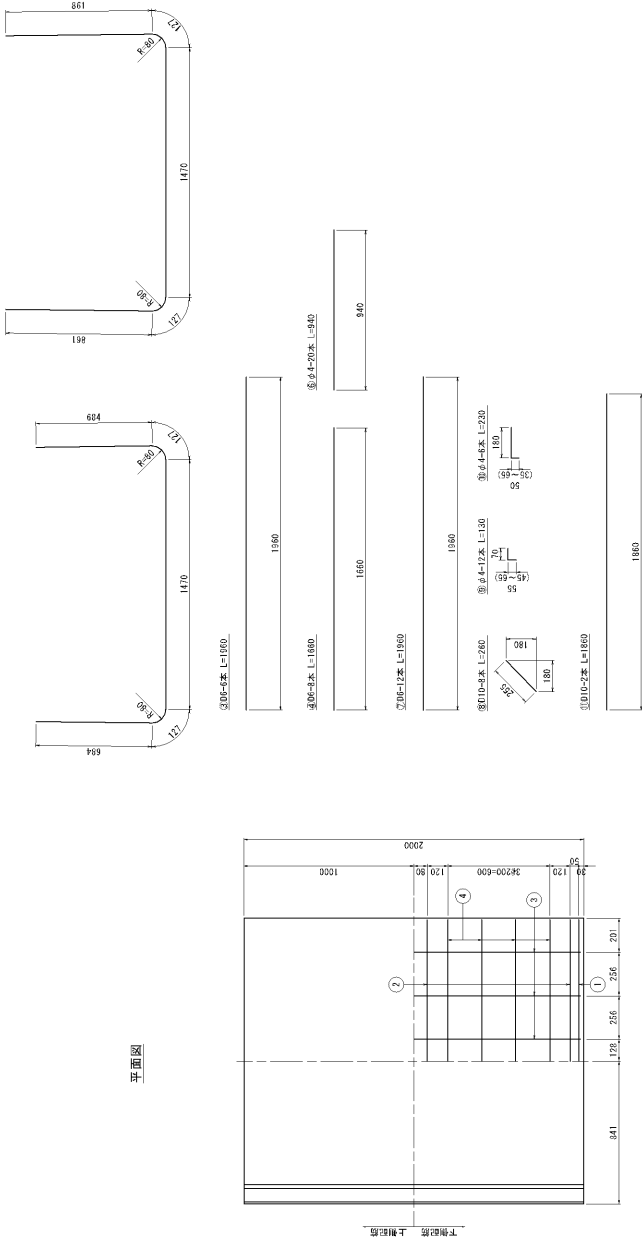


側面図

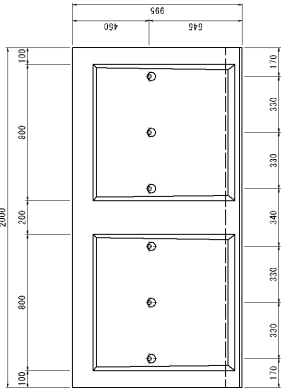


断面図

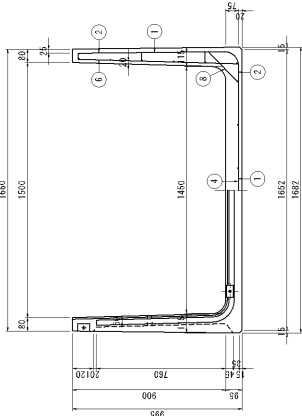

側面図

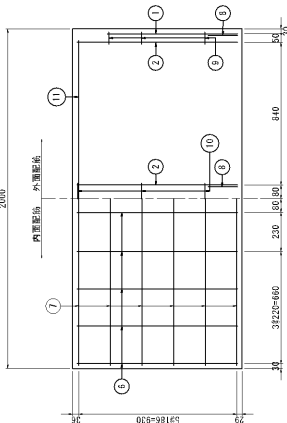

鉄筋加工図

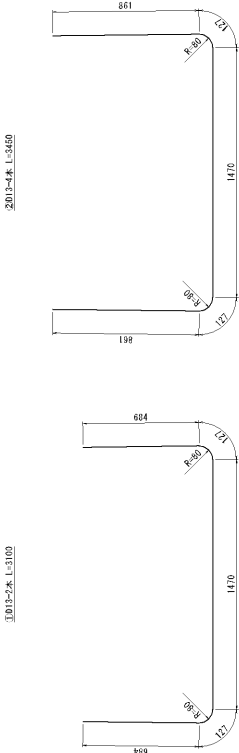


ワイドフレーム H900xB1700

2-115

材料表 (一本当り)


種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	3300	2	U	S315FA
2	D13	3850	4	U	S315FA
3	D6	1660	7	—	S315FA
4	D6	1660	8	—	S315FA
5	D6	1660	4	—	S225FA
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			41.324		
部品重量			1445 kg		

平面図

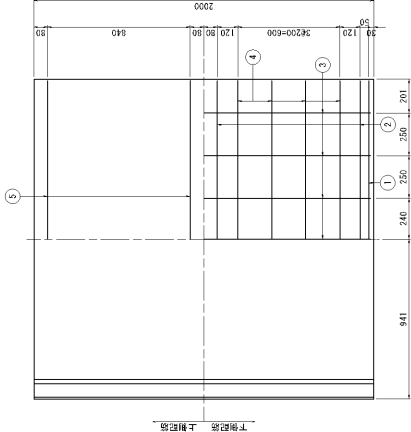


下側記号 上側記号


鉄筋加工図

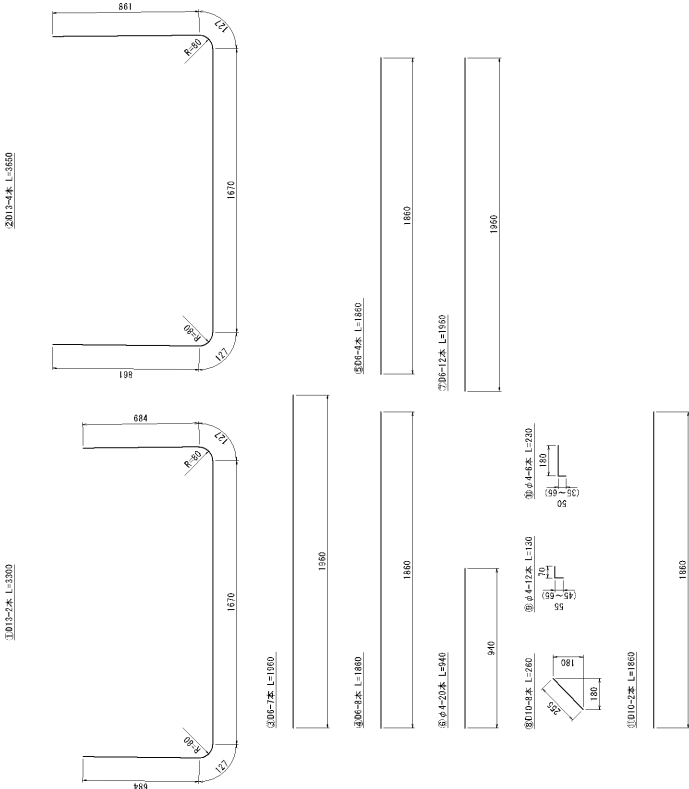


側面図

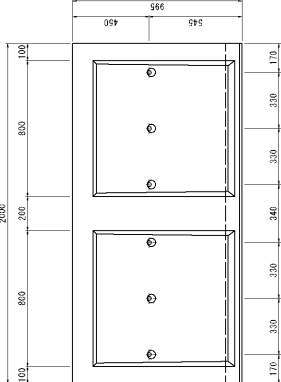

断面図

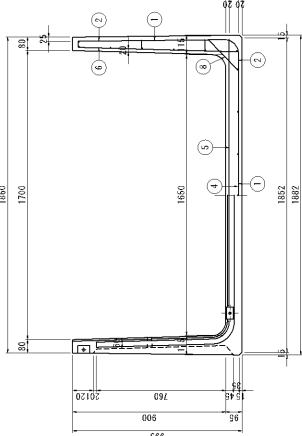

側面図

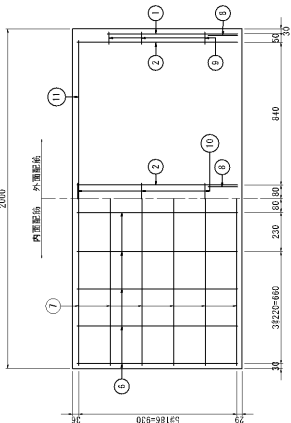


ワイドフレーム H900xB1800

2-115


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2400	2	U	S315FA
2	D13	3750	4	U	S315FA
3	D6	1660	7	—	S315FA
4	D6	1660	8	—	S315FA
5	D6	1660	4	—	S225FA
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			42.219		
製品重量			1490 kg		


平面図

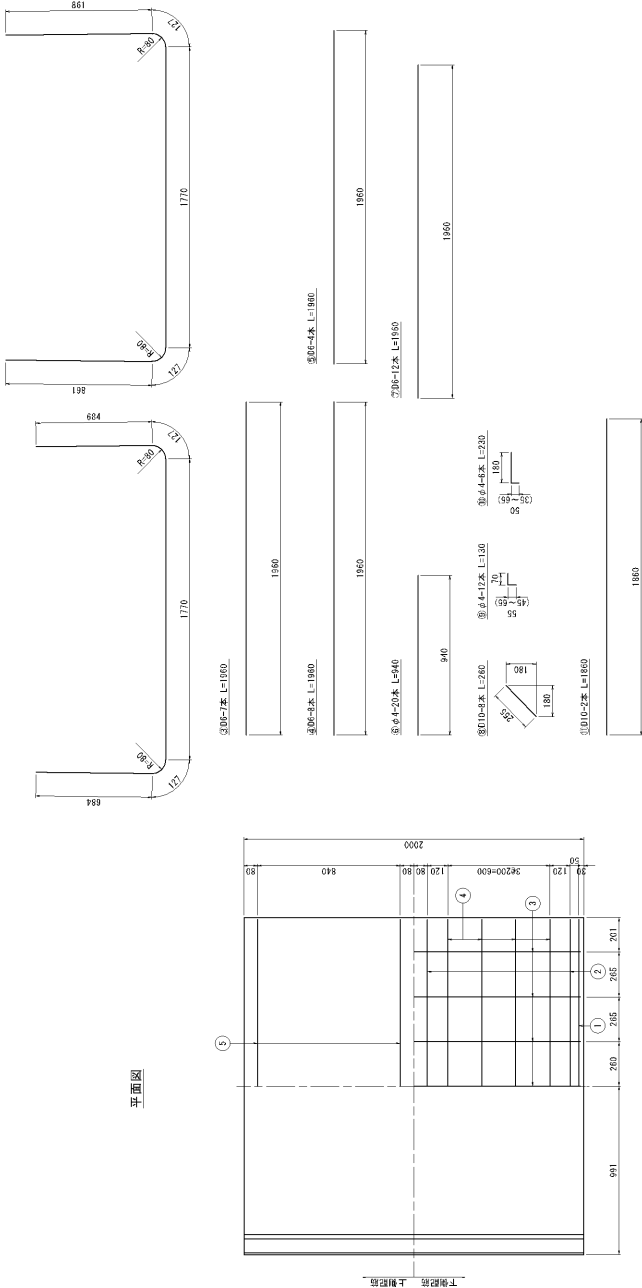


側面図

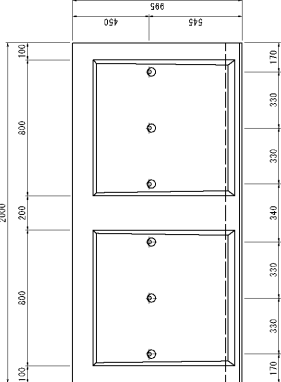

側面図

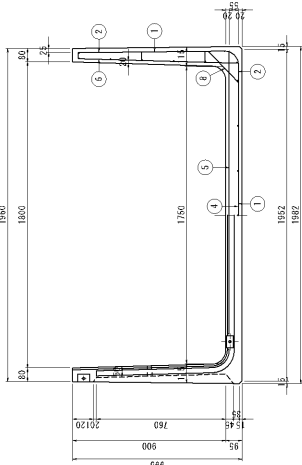

側面図

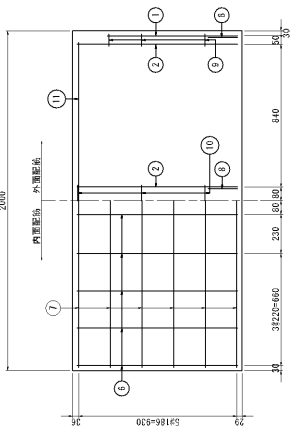

鉄筋加工図

①D13-2本 L=3400

②D13-4本 L=3750

$$S=1:16$$

Technical drawings of various L-shaped and U-shaped profiles with dimensions in millimeters.

①D13-2本 L=2360

U-shaped profile with a total length of 2360 mm. The vertical legs are 815 mm high. The horizontal base has a width of 490 mm. The inner corners are rounded with a radius of R=75 mm. The base has a thickness of 110 mm.

②D13-4本 L=2690

U-shaped profile with a total length of 2690 mm. The vertical legs are 815 mm high. The horizontal base has a width of 490 mm. The inner corners are rounded with a radius of R=75 mm. The base has a thickness of 110 mm.

③D6-2本 L=1960

L-shaped profile with a total length of 1960 mm.

④D6-5本 L=670

L-shaped profile with a total length of 670 mm.

⑤φ4-20本 L=1060

L-shaped profile with a total length of 1060 mm.

⑦D6-12本 L=1960

L-shaped profile with a total length of 1960 mm.

⑧D10-8本 L=280

L-shaped profile with a total length of 280 mm. The vertical leg is 155 mm high. The horizontal base has a width of 195 mm. The inner corner is rounded with a radius of R=75 mm.

⑨φ4-12本 L=130

L-shaped profile with a total length of 130 mm. The vertical leg is 55 mm high. The horizontal base has a width of 70 mm. The inner corner is rounded with a radius of R=70 mm.

⑩φ4-5本 L=240

L-shaped profile with a total length of 240 mm. The vertical leg is 55 mm high. The horizontal base has a width of 180 mm. The inner corner is rounded with a radius of R=70 mm.

⑩D10-2本 L=1860

L-shaped profile with a total length of 1860 mm.

Technical drawing of a double door unit. The overall width is 2000 mm and the overall height is 1100 mm. The unit consists of two doors, each 800 mm wide and 500 mm high. The doors are set within a frame that is 170 mm wide and 665 mm high. The drawing shows the doors with handles and the frame with a dashed line indicating the door opening.

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	2360	2	4.696	—	S275SL
	2	D13	2690	4	10.706	—	S275SL
	3	D6	1960	3	1.464	—	S275SL
	4	D6	670	8	1.335	—	S275SL
	5	—	—	—	—	—	—
	6	φ4	1060	20	2.039	—	S275SL
	7	D6	1960	14	6.933	—	S275SL
	8	D10	280	8	1.264	—	S275SL
	9	φ4	130	12	0.154	—	S275SL
	10	φ4	240	6	0.143	—	S275SL
防	11	D10	1860	2	2.082	—	S275SL
計					30.758		
製品重量				1025	kg		


ワイドフリューム H1000xB600

S=1:16


材 料 表 (一本当り)

種別	N	φ	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13		2460	2	4.895	┐	S275SA
	2	D13		2780	4	11.104	┐	S275SA
	3	D6		1960	3	1.464	┐	S275SA
	4	D6		770	8	1.534	┐	S275SA
	5	-		-	-	-	-	-
	6	φ4		1060	20	2.099	┐	S275SA
	7	D6		1960	14	6.833	┐	S275SA
	8	D10		280	8	1.254	┐	S275SA
	9	φ4		130	12	0.154	┐	S275SA
	10	φ4		240	6	0.143	┐	S275SA
	11	D10		1860	2	2.083	┐	S275SA
計						31.963		
製品質量					1074	kg		


平面図

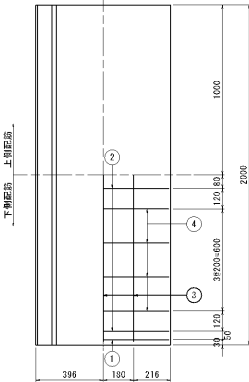


側面図

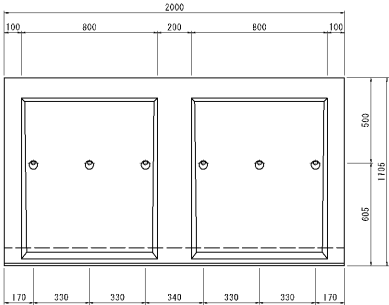


断面図



鉄筋加工図

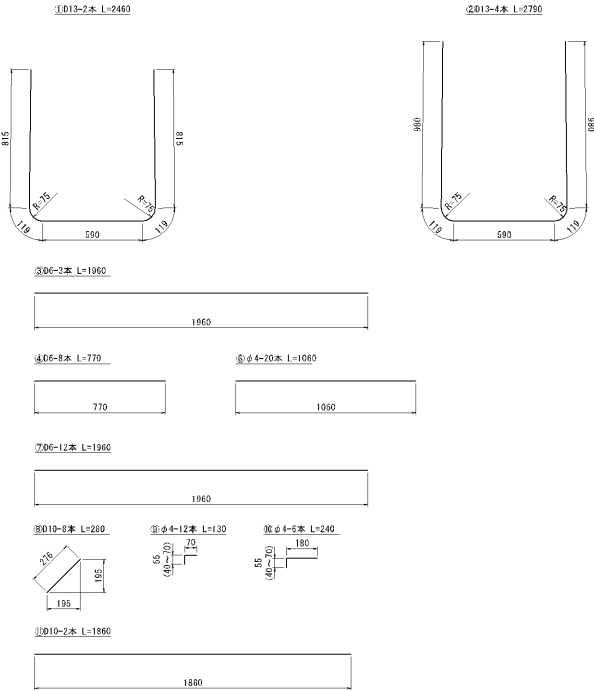

側面図

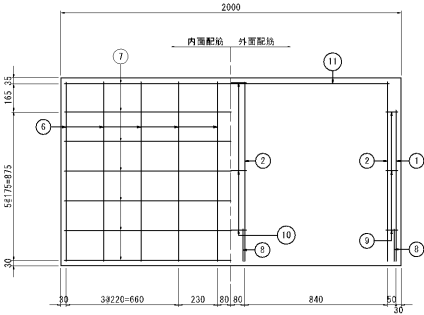

S=1:16

Technical drawings of various U-shaped and rectangular profiles with dimensions and material specifications.

①D13-2木 L=250

U-shaped profile with a total length of 250. The base width is 600. The height of the vertical legs is 815. The base has a radius of R=75. The base is divided into three sections: 119, 600, and 119.

②D13-4木 L=2850

U-shaped profile with a total length of 2850. The base width is 600. The height of the vertical legs is 800. The base has a radius of R=75. The base is divided into three sections: 119, 600, and 119.

③06-2木 L=1960

Rectangular profile with a total length of 1960.

④06-8木 L=870

Rectangular profile with a total length of 870.

⑤φ4-20木 L=1060

Rectangular profile with a total length of 1060.

⑦06-12木 L=1960

Rectangular profile with a total length of 1960.

⑧D10-8木 L=280

U-shaped profile with a total length of 280. The base width is 195. The height of the vertical legs is 155. The base has a radius of R=75.

⑨φ4-12木 L=130

Rectangular profile with a total length of 130. The base width is 70. The height of the vertical legs is 55.

⑩φ4-5木 L=240

Rectangular profile with a total length of 240. The base width is 180. The height of the vertical legs is 55.

⑪D10-2木 L=1860

Rectangular profile with a total length of 1860.

[illegible][illegible]

Technical drawing of a double door unit. The overall width is 2000 mm, divided into segments of 100, 800, 230, 800, and 100 mm. The overall height is 1700 mm, with a door height of 500 mm and a base height of 605 mm. The drawing shows two doors, each with three circular handles. The base of the unit is divided into segments of 170, 330, 330, 340, 330, 330, and 170 mm.

種別	No	径 (mm)	長さ	本数	重量 (kg)	形状	材質
鉄	1	D13	2560	2	5.094		S275SL
	2	D13	2880	4	11.502		S275SL
	3	D6	1960	3	1.464		S275SL
	4	D6	870	8	1.733		S275SL
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099		S275SL
	7	D6	1960	14	6.833		S275SL
	8	D10	280	8	1.254		S275SL
	9	φ4	130	12	0.154		S275SL
	10	φ4	240	6	0.143		S275SL
筋	11	D10	1660	2	2.083		S275SL
	計				32.359		
製品重量				1123	kg		


ワイドフリューム H1000xB800

S=1:15


材 料 表 (一本当り)

種別	N	φ	径 (mm)	長さ	本数	重 量 (kg)	形 状	材 質
鉄	1	D13	2660	2	5.293	└	S275SA	
	2	D13	2990	4	11.900	└	S275SA	
	3	D6	1960	4	1.952	└	S275SA	
	4	D6	970	8	1.932	└	S275SA	
	5	-	-	-	-	-	-	
	6	φ4	1060	20	2.099	└	S275SA	
	7	D6	1960	14	6.833	└	S275SA	
	8	D10	280	8	1.254	└	S275SA	
	9	φ4	130	12	0.154	└	S275SA	
	10	φ4	240	6	0.143	└	S275SA	
	11	D10	1860	2	2.083	└	S275SA	
筋								
	計					33.643		
製品質量		1173	kg					


平面図

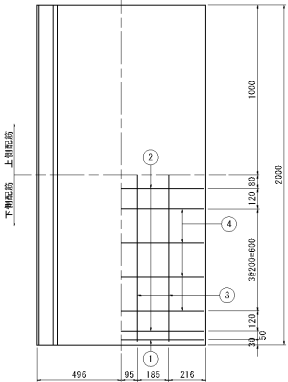


側面図

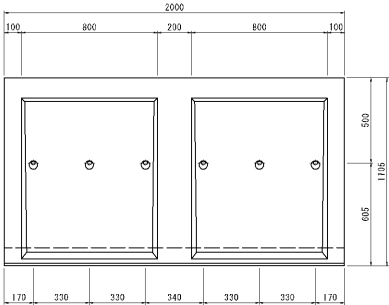


断面図



鉄筋加工図

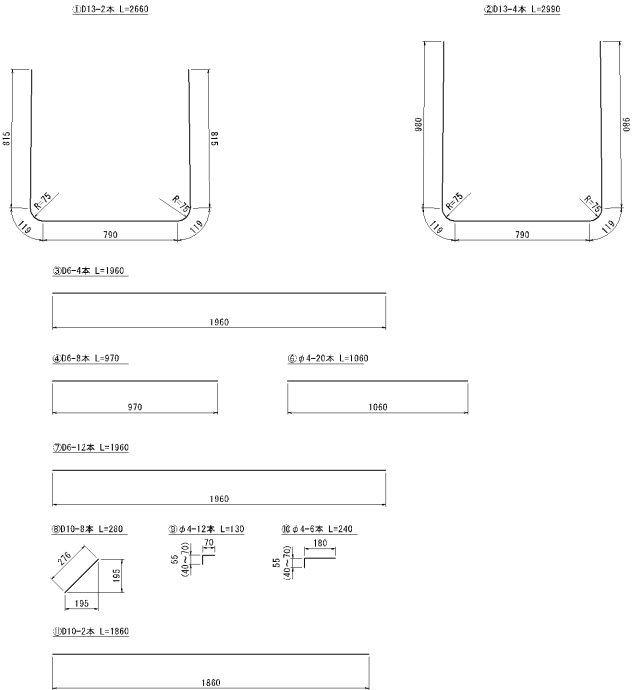

側面図

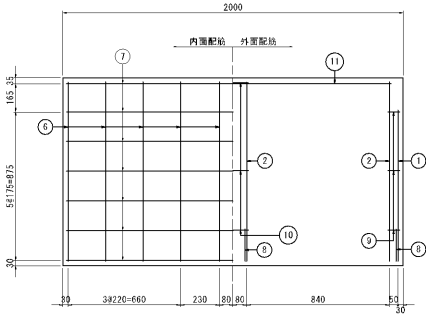


ワイドフリューム H1000xB900

S=1:15


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	2760	2	5.492	┌	S529SA
	2	D13	3090	4	12.298	└	S529SA
	3	D6	1960	4	1.952	—	S529SA
	4	D6	1070	8	2.131	—	S529SA
	5	—	—	—	—	—	—
	6	φ4	1060	20	2.099	—	S529SA
	7	D6	1960	14	6.933	—	S529SA
	8	D10	280	8	1.254	—	S529SA
	9	φ4	130	12	0.154	—	S529SA
	10	φ4	240	6	0.143	—	S529SA
	11	D10	1860	2	2.083	—	S529SA
計					34.439		
製品質量				1222	kg		


平面図

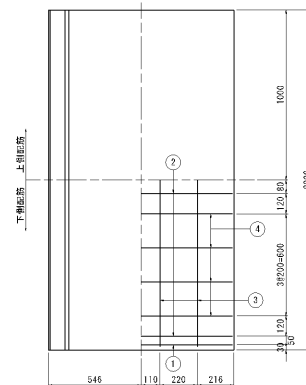


鉄筋加工図

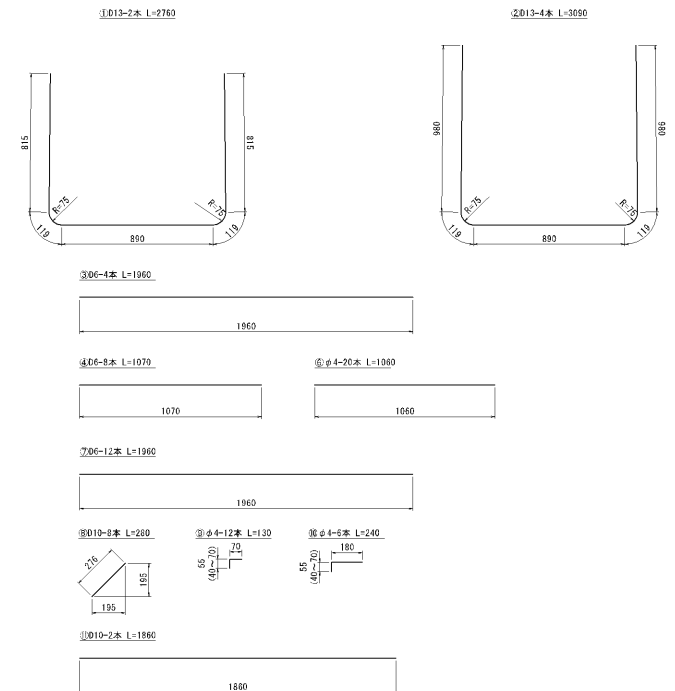


側面図

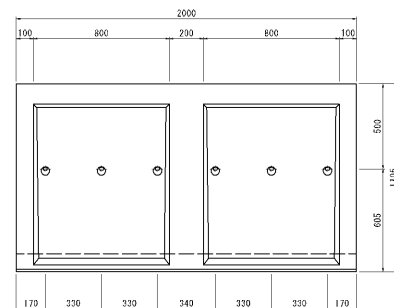

断面図



側面図

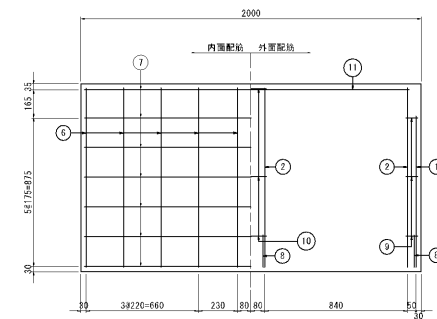

$$S=1:1S$$

Technical drawings of L-shaped and T-shaped profiles with dimensions in mm.

① D13-2本 L=2860

Profile 1: L-shaped profile. Dimensions: 815 (vertical), 990 (horizontal), 518 (vertical), 112 (radius), R=75 (fillet).

② D13-4本 L=3190

Profile 2: L-shaped profile. Dimensions: 960 (vertical), 990 (horizontal), 1380 (vertical), 112 (radius), R=75 (fillet).

③ D6-4本 L=1960

Profile 3: L-shaped profile. Dimensions: 1960 (horizontal).

④ D6-8本 L=1170

Profile 4: L-shaped profile. Dimensions: 1170 (horizontal).

⑤ φ4-20本 L=1060

Profile 5: L-shaped profile. Dimensions: 1060 (horizontal).

⑦ D6-12本 L=1960

Profile 6: L-shaped profile. Dimensions: 1960 (horizontal).

⑧ D10-8本 L=2280

Profile 7: L-shaped profile. Dimensions: 195 (horizontal), 155 (vertical), 175 (diagonal).

⑨ φ4-12本 L=130

Profile 8: T-shaped profile. Dimensions: 130 (horizontal), 20 (vertical), 55 (radius), R=75 (fillet).

⑩ φ4-6本 L=240

Profile 9: T-shaped profile. Dimensions: 240 (horizontal), 180 (vertical), 55 (radius), R=75 (fillet).

⑪ D10-2本 L=1860

Profile 10: L-shaped profile. Dimensions: 1860 (horizontal).

Technical drawing of a window frame cross-section. The drawing shows a vertical section with various components labeled with circled numbers 1 through 7. Dimensions are provided in millimeters (mm) and inches (in). The total height is 1000 mm (39 1/2 in). The width is divided into sections of 596 mm, 125 mm, 255 mm, and 216 mm. The total width is 1192 mm (47 in). The drawing includes a dashed line indicating a break in the section.

種別	No	径 (mm)	長さ	本数	重量 (kg)	形状	材質
鉄	1	D13	2860	2	5.691	—	S275JR
	2	D13	3190	4	12.696	—	S275JR
	3	D6	1960	4	1.952	—	S275JR
	4	D6	1170	8	2.331	—	S275JR
	5	—	—	—	—	—	—
	6	φ4	1060	20	2.039	—	S275JR
	7	D6	1960	14	6.833	—	S275JR
	8	D10	280	8	1.254	—	S275JR
	9	φ4	130	12	0.154	—	S275JR
	10	φ4	240	6	0.143	—	S275JR
筋	D10	1860	2	2.083	—	S275JR	
	計				35.236		
製品重量		1271	kg				

Technical drawing of a rectangular frame with dimensions and numbered callouts. The overall dimensions are 1170 (width) and 1725 (height). The inner dimensions are 1000 (width) and 1090 (height). The frame has a thickness of 85. The drawing includes several numbered callouts (1-8) indicating specific features or components. The frame is shown in a perspective view, with the front and side faces visible. The dimensions are given in millimeters (mm).

$$S=1:1S$$

Technical drawings of L-shaped and U-shaped profiles with dimensions and section views.

① 013-2 本 L=2960

Profile dimensions: 815, 119, R=75, 1090, 815.

② 013-4 本 L=3290

Profile dimensions: 860, 119, R=75, 1090, 860.

③ 06-5 本 L=1960

Profile dimension: 1960.

④ 06-8 本 L=1270

Profile dimension: 1270.

⑤ ④-20 本 L=1060

Profile dimension: 1060.

⑦ 06-12 本 L=1990

Profile dimension: 1990.

⑧ 010-8 本 L=220

Section view dimensions: 276, 195, 195.

⑨ ④-12 本 L=130

Section view dimensions: 55, 40, 70, 70.

⑩ ④-5 本 L=240

Section view dimensions: 55, 40, 70, 180.

⑪ 010-2 本 L=1860

Profile dimension: 1860.

Technical drawing of a corner cabinet (Einbauecke) showing dimensions and components. The drawing includes a top view and a side view. The top view shows a square corner with dimensions: total width 1270, total depth 1195, inner width 1100, inner depth 1050, and corner radius 85. The side view shows a depth of 1090 and a height of 205. The drawing is labeled with numbers 1 through 8, corresponding to the parts list.

Technical drawing of a double door unit. The drawing shows a top view and a side view. The top view dimensions are: total width 2000, with segments of 100, 800, 730, 800, and 100. The side view dimensions are: total height 1700, with segments of 500 and 605. The drawing also shows the internal structure of the doors, including the frame and the door panels. The door panels are labeled with '170', '330', '340', '330', and '170' at the bottom. The door panels are also labeled with '170', '330', '340', '330', and '170' at the bottom.

種別	No	径 (mm)	長さ (mm)	本数	質量 (kg)	形状	材質
鉄	1	D13	2960	2	5.890	U	S27058A
	2	D13	3290	4	13.094	U	S27058A
	3	D6	1960	5	2.440	U	S27058A
	4	D6	1270	8	2.530	U	S27058A
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	U	S27058A
	7	D6	1960	14	6.833	U	S27058A
	8	D10	280	8	1.254	U	S27058A
	9	φ4	130	12	0.154	U	S27058A
	10	φ4	240	6	0.143	U	S27058A
筋	11	D10	1860	2	2.083	U	S27058A
	計				36.520		
質量合算				1821	kg		


ワイドフリューム H1000xB1200

S=1:15


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	3060	2	6.089	└	S275SA
	2	D13	3390	4	13.492	└	S275SA
	3	D6	1960	5	2.440	└	S275SA
	4	D6	1370	8	2.729	└	S275SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	└	S275SA
	7	D6	1960	14	6.933	└	S275SA
	8	D10	280	8	1.254	└	S275SA
	9	φ4	130	12	0.154	└	S275SA
	10	φ4	240	6	0.143	└	S275SA
	11	D10	1860	2	2.083	└	S275SA
筋							
計					37.316		
製品質量			1370	kg			


平面図

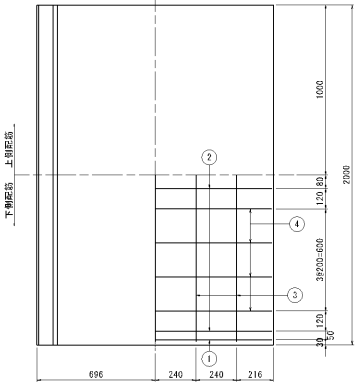


側面図

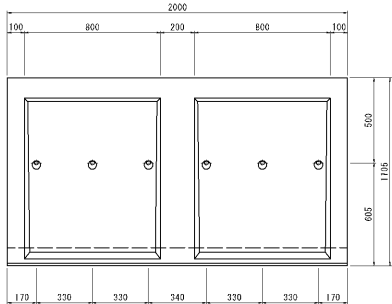


断面図

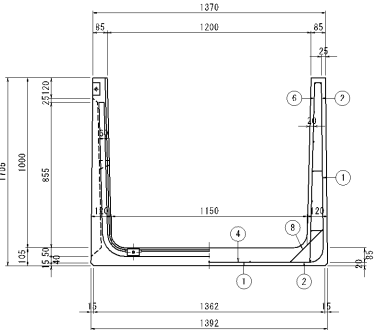

鉄筋加工図

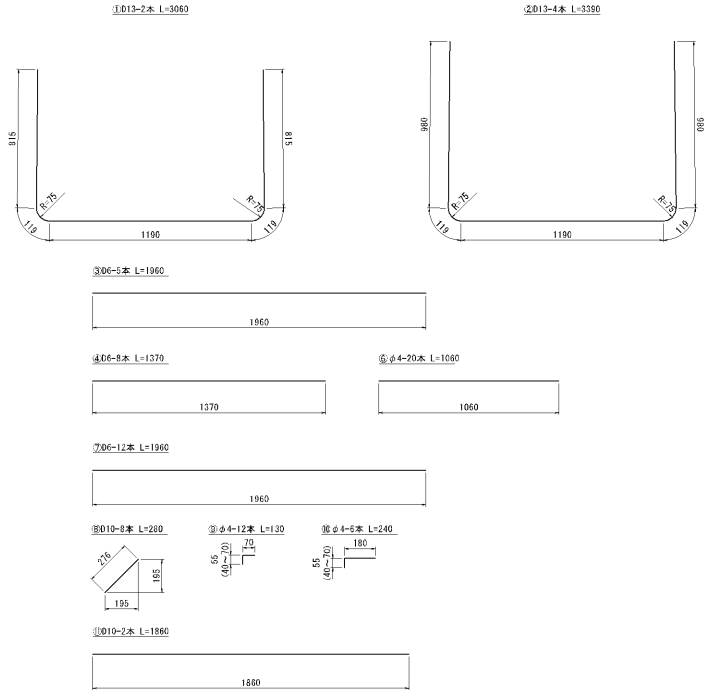

側面図

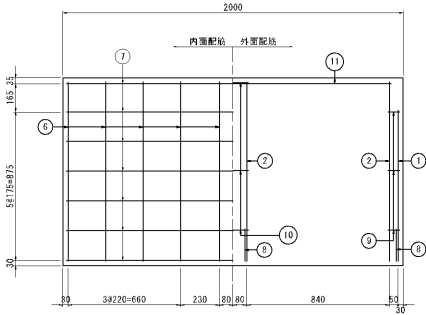


ワイドフリューム H1000xB1300

S=1:15


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	3160	2	6.288	┐	S275SA
	2	D13	3490	4	13.890	┐	S275SA
	3	D6	1960	5	2.440	┐	S275SA
	4	D6	1470	8	2.928	┐	S275SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	┐	S275SA
	7	D6	1960	14	6.933	┐	S275SA
	8	D10	280	8	1.254	┐	S275SA
	9	φ4	130	12	0.154	┐	S275SA
	10	φ4	240	6	0.143	┐	S275SA
	11	D10	1860	2	2.083	┐	S275SA
計					38.112		
製品質量				1419	kg		


平面図

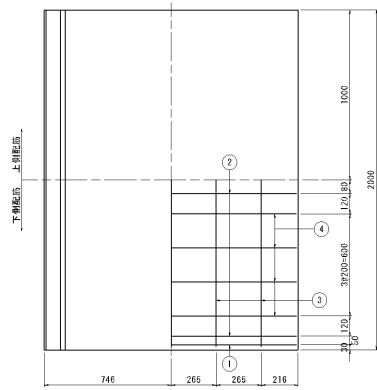


鉄筋加工図

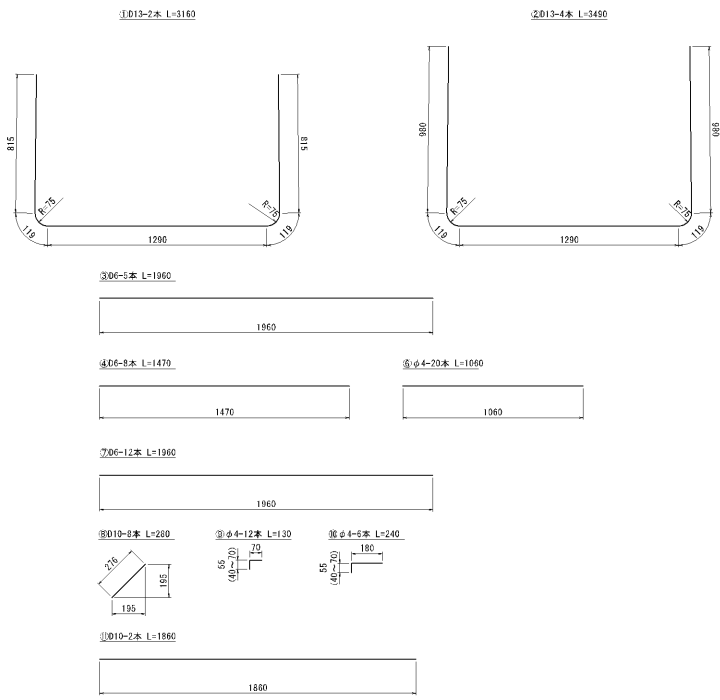


側面図

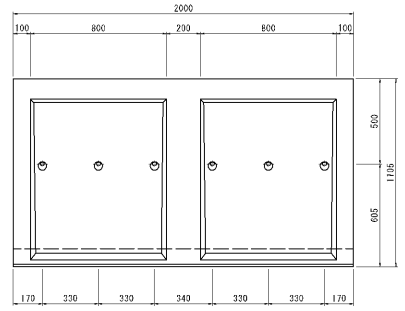

断面図

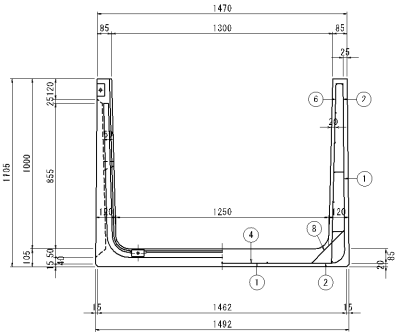

側面図

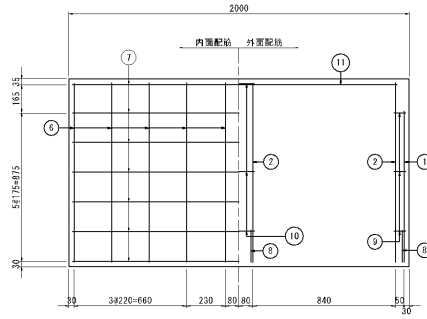


ワイドフリューム H1000xB1400

S=1:16


材 料 表 (一本当り)

種別	N	φ	径 (mm)	長さ	本数	重量 (kg)	形状	材質
鉄	1	D13	3260	2	6.487	┌ └ ┌ └	S275SA	
	2	D13	3590	4	14.288			
	3	D6	1960	6	2.928			
	4	D6	1570	8	3.127			
	5	φ4						
	6	φ4	1060	20	2.099	┌ └ ┌ └ ┌	S275SA	
	7	D6	1960	14	6.933			
	8	D10	780	8	1.254			
	9	φ4	130	12	0.154			
	10	φ4	240	6	0.143			
	筋	11	D10	1860	2	2.083	└	S275SA
	計					39.396		
製品質量			1469	kg				


平面図

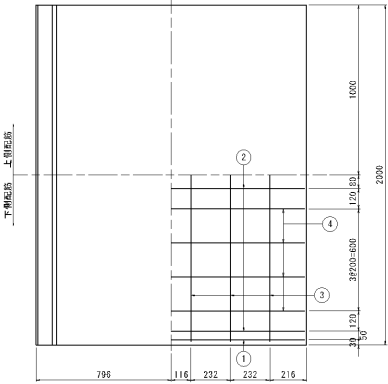


鉄筋加工図

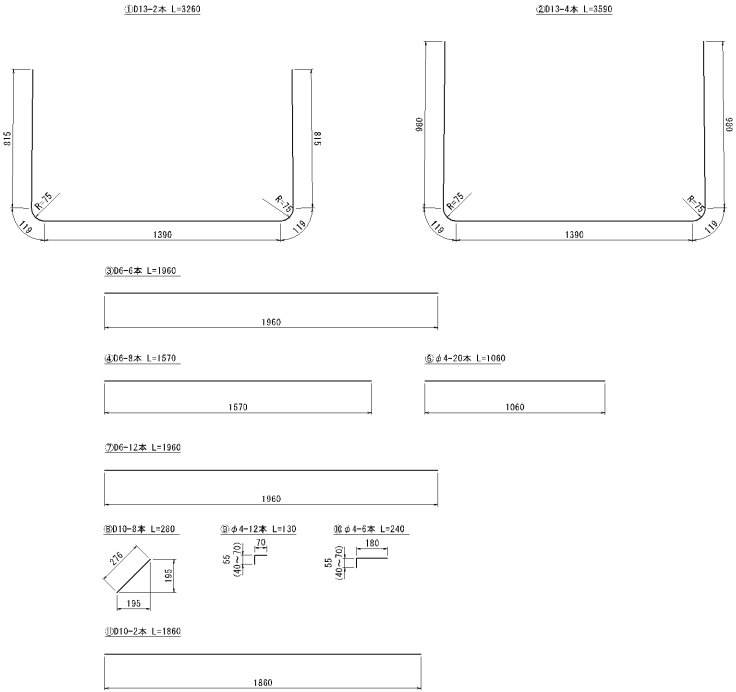


側面図

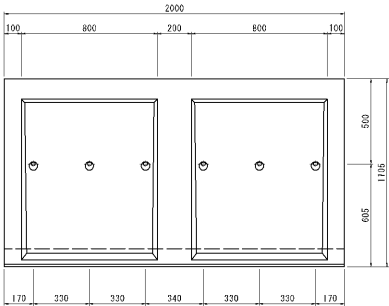

断面図

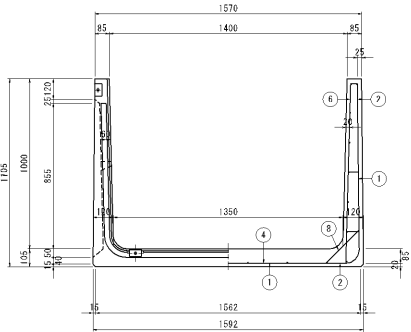


側面図

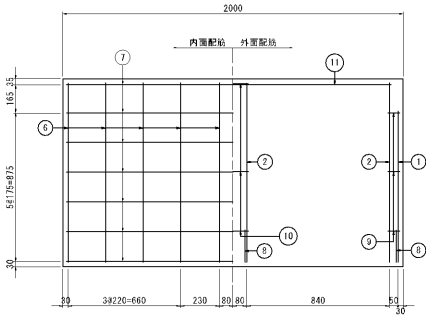


$$S=1:16$$

鉄筋加工図

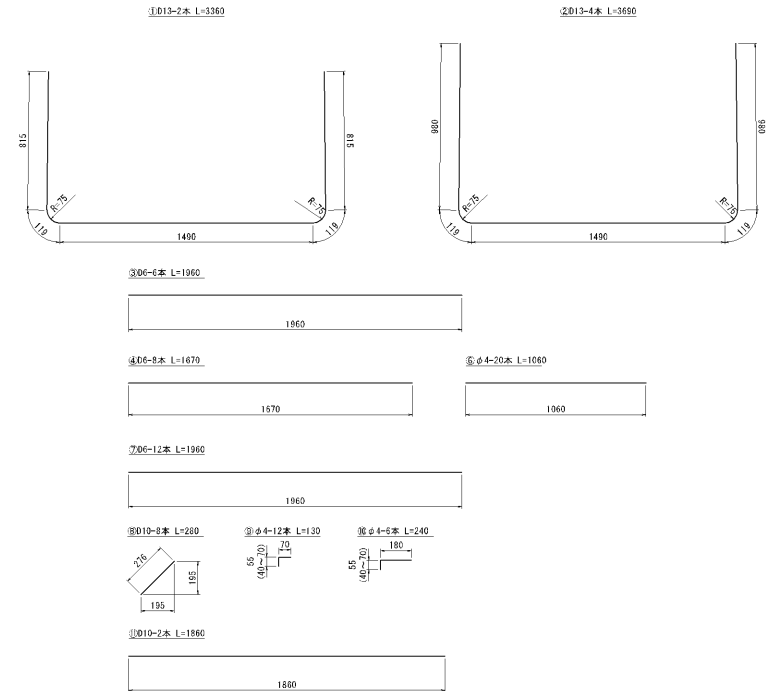


平面图

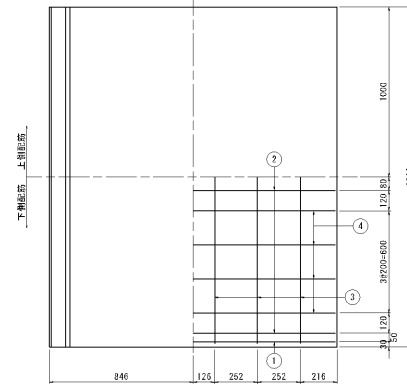


材 料 表 (一本当り)

種別	N	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	3360	2	6.686	U	S275FS
	2	D12	3690	4	14.686	U	S275FS
	3	D6	1960	6	2.928	U	S275FS
	4	D6	1670	8	3.327	U	S275FS
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.039	—	S275FS
	7	D6	1960	14	6.833	—	S275FS
	8	D10	280	8	1.254	—	S275FS
	9	φ4	130	12	0.154	—	S275FS
	10	φ4	240	6	0.143	—	S275FS
防	11	D10	1860	2	2.082	—	S275FS
計					40.193		
製造品質			1516	kg			


側面図

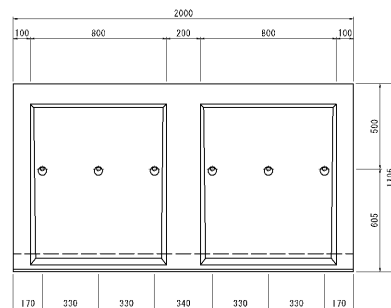

断面図

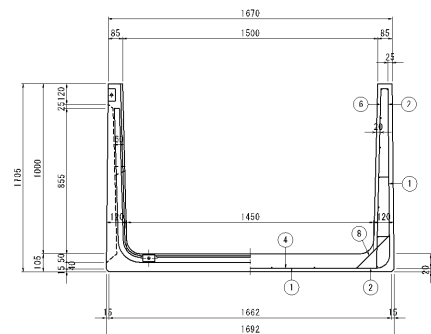

側面図

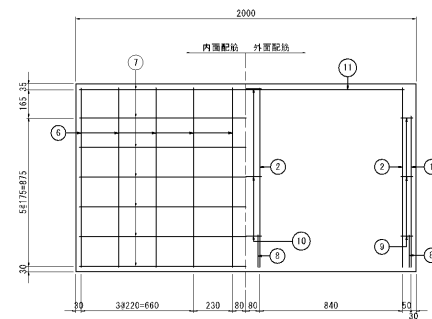

$$S=1:16$$
[illegible]

種別	No.	径 (mm)	長さ	本数	重量 (kg)	形状	材質
鉄	1	D13	3460	2	6.383	┌┐	S325SA
	2	D13	3790	4	15.084	┌┐	S325SA
	3	D6	1960	6	2.928	┌┐	S325SA
	4	D6	1770	8	3.526	┌┐	S325SA
	5	D6	1770	4	1.763	┌┐	SD286SA
	6	φ4	1060	20	2.099	┌┐	S325SA
	7	D6	1960	14	6.933	┌┐	S325SA
	8	D10	280	8	1.264	┌┐	S325SA
	9	φ4	130	12	6.154	┌┐	S325SA
	10	φ4	240	6	0.143	┌┐	S325SA
防	11	D10	1860	2	2.083	┌┐	S325SA
	計				42.752		
製品重量				1567	kg		

Technical drawing of a double-door cabinet. The overall width is 2000 mm, divided into segments of 100, 800, 730, 800, and 100 mm. The overall height is 1710 mm, with a main body height of 500 mm and a base height of 605 mm. The cabinet has two doors, each with three circular handles. The base is shown with a dashed line. The bottom edge has dimensions: 170, 330, 330, 340, 330, 330, and 170 mm.

Technical drawing of a rectangular building footprint. The drawing includes the following dimensions and callouts:

- Overall Dimensions:**
 - Top: 1770 (total), 1600 (between offsets)
 - Right: 85 (total), 25 (offset)
 - Bottom: 1792 (total), 1762 (between offsets)
 - Left: 1125 (total), 1090 (between offsets)
- Internal Dimensions:**
 - Top: 85 (between offsets)
 - Right: 25 (offset)
 - Bottom: 1556 (between offsets)
 - Left: 105 (offset), 855 (between offsets), 25120 (between offsets)
- Callouts:**
 - 1: Corner chamfer
 - 2: Wall thickness
 - 3: Wall thickness
 - 4: Wall thickness
 - 5: Wall thickness
 - 6: Wall thickness
 - 7: Wall thickness
 - 8: Wall thickness
 - 9: Wall thickness
 - 10: Wall thickness
 - 11: Wall thickness
 - 12: Wall thickness
 - 13: Wall thickness
 - 14: Wall thickness
 - 15: Wall thickness
 - 16: Wall thickness
 - 17: Wall thickness
 - 18: Wall thickness
 - 19: Wall thickness
 - 20: Wall thickness
 - 21: Wall thickness
 - 22: Wall thickness
 - 23: Wall thickness
 - 24: Wall thickness
 - 25: Wall thickness
 - 26: Wall thickness
 - 27: Wall thickness
 - 28: Wall thickness
 - 29: Wall thickness
 - 30: Wall thickness
 - 31: Wall thickness
 - 32: Wall thickness
 - 33: Wall thickness
 - 34: Wall thickness
 - 35: Wall thickness
 - 36: Wall thickness
 - 37: Wall thickness
 - 38: Wall thickness
 - 39: Wall thickness
 - 40: Wall thickness
 - 41: Wall thickness
 - 42: Wall thickness
 - 43: Wall thickness
 - 44: Wall thickness
 - 45: Wall thickness
 - 46: Wall thickness
 - 47: Wall thickness
 - 48: Wall thickness
 - 49: Wall thickness
 - 50: Wall thickness
 - 51: Wall thickness
 - 52: Wall thickness
 - 53: Wall thickness
 - 54: Wall thickness
 - 55: Wall thickness
 - 56: Wall thickness
 - 57: Wall thickness
 - 58: Wall thickness
 - 59: Wall thickness
 - 60: Wall thickness
 - 61: Wall thickness
 - 62: Wall thickness
 - 63: Wall thickness
 - 64: Wall thickness
 - 65: Wall thickness
 - 66: Wall thickness
 - 67: Wall thickness
 - 68: Wall thickness
 - 69: Wall thickness
 - 70: Wall thickness
 - 71: Wall thickness
 - 72: Wall thickness
 - 73: Wall thickness
 - 74: Wall thickness
 - 75: Wall thickness
 - 76: Wall thickness
 - 77: Wall thickness
 - 78: Wall thickness
 - 79: Wall thickness
 - 80: Wall thickness
 - 81: Wall thickness
 - 82: Wall thickness
 - 83: Wall thickness
 - 84: Wall thickness
 - 85: Wall thickness
 - 86: Wall thickness
 - 87: Wall thickness
 - 88: Wall thickness
 - 89: Wall thickness
 - 90: Wall thickness
 - 91: Wall thickness
 - 92: Wall thickness
 - 93: Wall thickness
 - 94: Wall thickness
 - 95: Wall thickness
 - 96: Wall thickness
 - 97: Wall thickness
 - 98: Wall thickness
 - 99: Wall thickness
 - 100: Wall thickness

Technical drawings of L-shaped and rectangular profiles with dimensions and material specifications.

①D13-2木 L=3460

Dimensions: 815, 118, R-75, 1590, 518, 118.

②D13-4木 L=3790

Dimensions: 980, 118, R-75, 1590, 686, 118.

③D6-6木 L=1960

Dimensions: 1960.

④D6-8木 L=1770

Dimensions: 1770.

⑤D6-4木 L=1770

Dimensions: 1770.

⑥φ4-20木 L=1960

Dimensions: 1960.

⑦D6-12木 L=1960

Dimensions: 1960.

⑧D10-8木 L=280

Dimensions: 276, 155, 155.

⑨φ4-12木 L=130

Dimensions: 55, 70, 70, 70.

⑩φ4-5木 L=240

Dimensions: 55, 180, 70, 70.

⑪D10-2木 L=1860

Dimensions: 1860.


ワイドフリューム H1000xB1700

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	3560	2	7.084	┌	S275SA
	2	D13	3890	4	15.482	└	S275SA
	3	D6	1960	7	3.416	—	S275SA
	4	D6	1870	8	3.725	—	S275SA
	5	D6	1870	4	1.863	—	S275SA
	6	φ4	1060	20	2.099	—	S275SA
	7	D6	1960	14	6.833	—	S275SA
	8	D10	280	8	1.254	—	S275SA
	9	φ4	130	12	0.154	—	S275SA
	10	φ4	240	6	0.143	—	S275SA
	11	D10	1860	2	2.083	—	S275SA
筋							
	計				44.136		
製品質量			1617	kg			


平面図

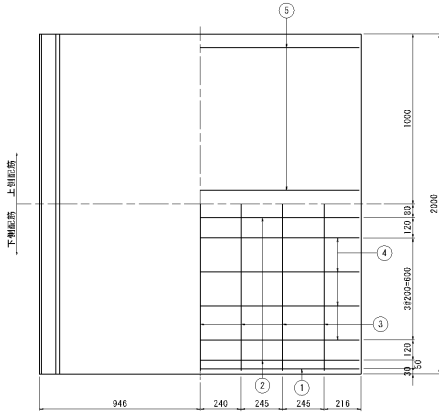


鉄筋加工図

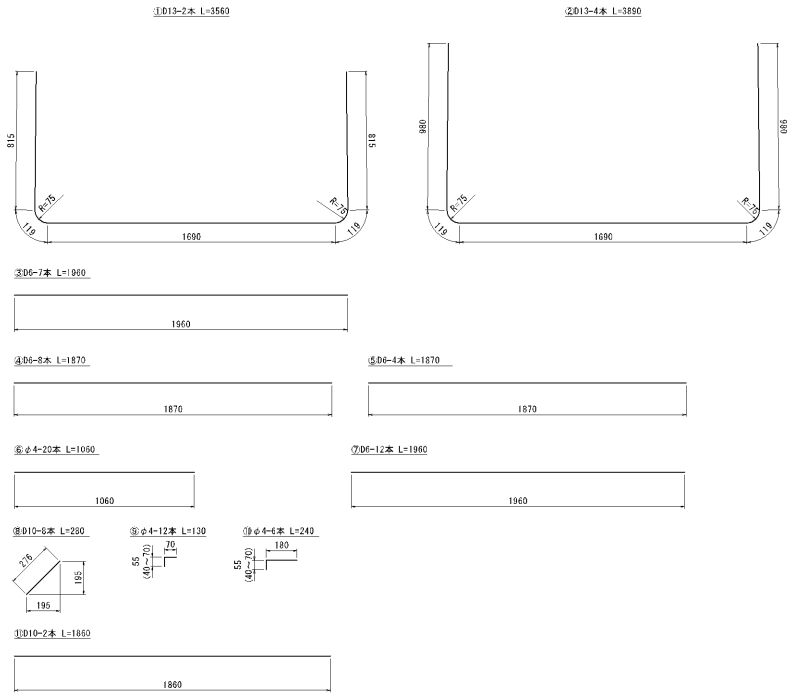


側面図

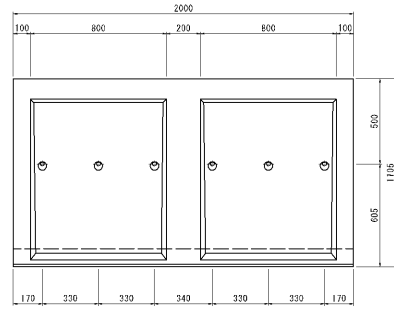

断面図

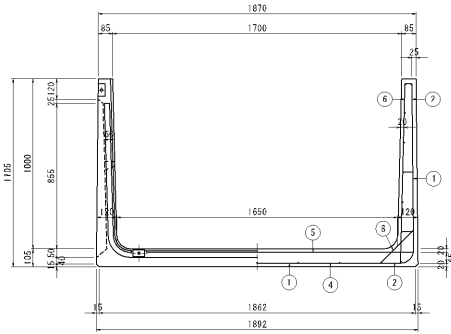

側面図

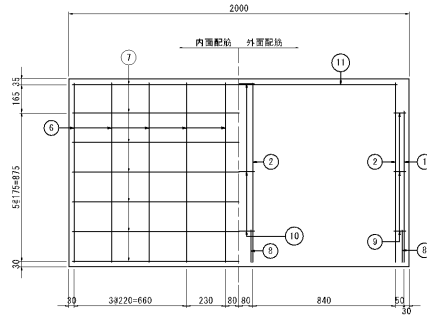


ワイドフリューム H1000xB1800

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	3660	2	7.283	└	S275SA
	2	D13	3990	4	15.880	└	S275SA
	3	D6	1960	7	3.416	└	S275SA
	4	D6	1970	8	3.924	└	S275SA
	5	D6	1970	4	1.962	└	S275SA
	6	φ4	1060	20	2.099	└	S275SA
	7	D6	1960	14	6.833	└	S275SA
	8	D10	780	8	1.254	└	S275SA
	9	φ4	130	12	0.154	└	S275SA
	10	φ4	240	6	0.183	└	S275SA
	11	D10	1860	2	2.083	└	S275SA
筋							
	計				45.031		
製品質量			1666	kg			


平面図

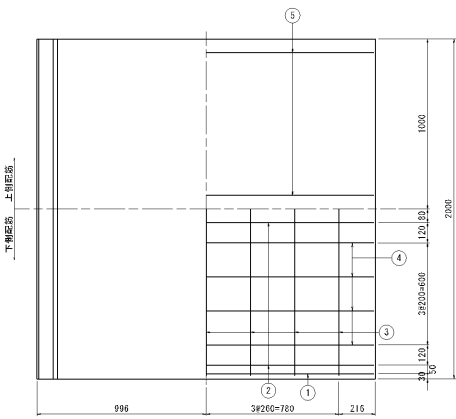


側面図

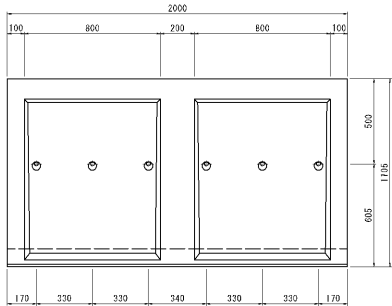


断面図

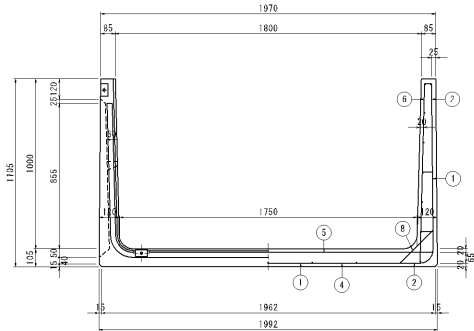

鉄筋加工図

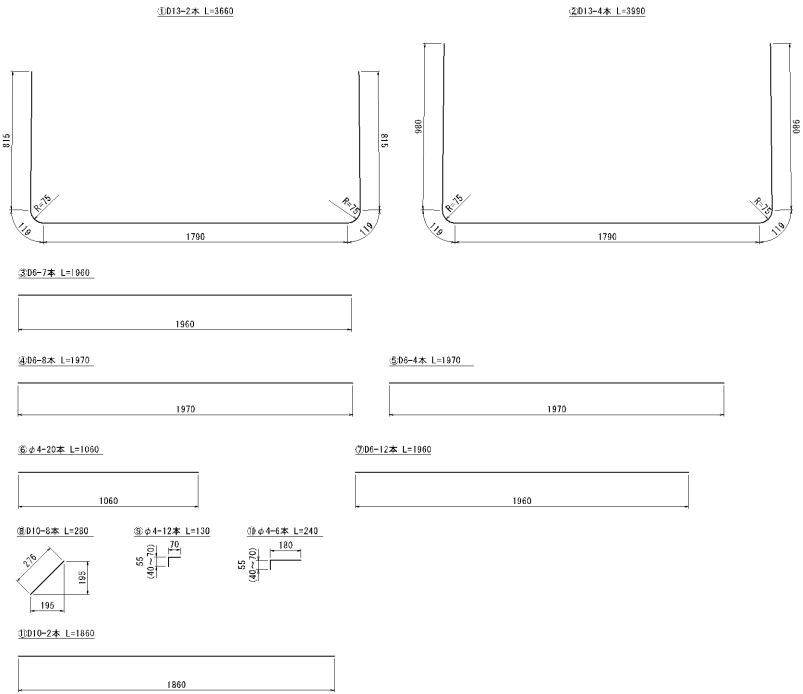

側面図

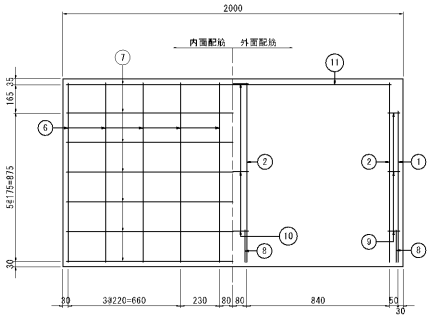


ワイドフリューム H1000xB1900

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	3760	2	7.482	┐	S3295A
	2	D13	4090	4	16.278	┐	S3295A
	3	D6	1960	7	3.416	┐	S3295A
	4	D6	2070	8	4.123	┐	S3295A
	5	D6	2070	4	2.062	┐	S3295A
	6	φ4	1060	20	2.099	┐	S3295A
	7	D6	1960	14	6.833	┐	S3295A
	8	D10	780	8	1.254	┐	S3295A
	9	φ4	130	12	0.154	┐	S3295A
	10	φ4	240	6	0.143	┐	S3295A
	11	D10	1860	2	2.083	┐	S3295A
計					45.927		
製品質量				1715	kg		


平面図

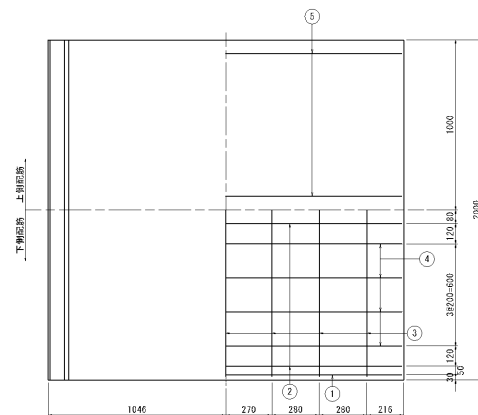


鉄筋加工図

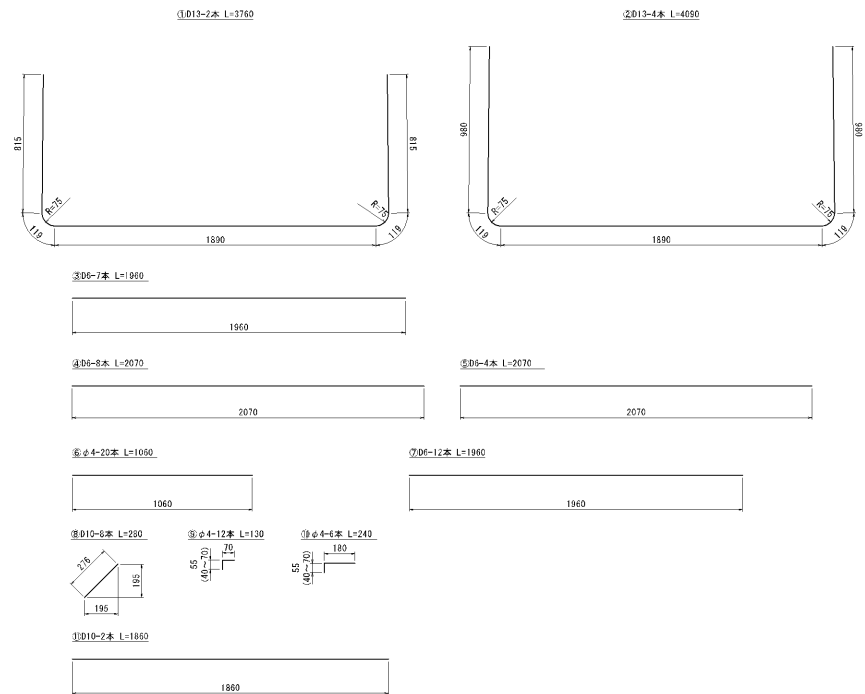


側面図

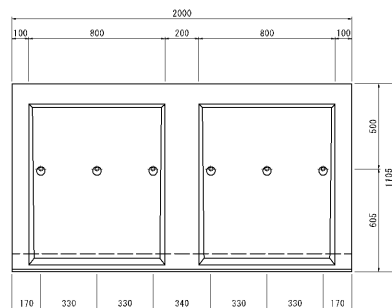

断面図

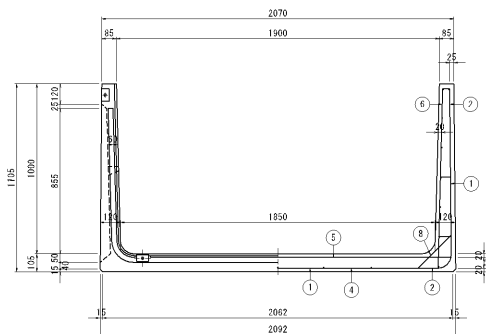

側面図

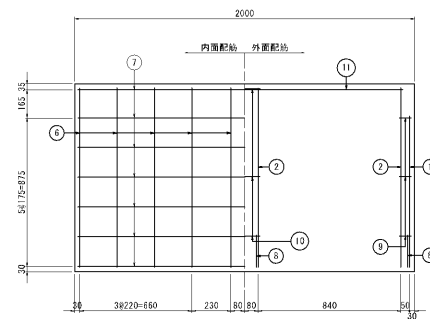


ワイドフリューム H1100xB600

2-115


材料表 (一本当り)

種別 No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	2620	2	8.174	□	S275JR
2	D16	3020	4	18.845	□	S275JR
3	D6	1860	3	1.464	—	S275JR
4	D6	760	8	1.514	—	S275JR
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S275JR
7	D6	1860	16	7.859	—	S275JR
8	D10	290	8	1.299	—	S275JR
9	φ4	140	12	0.168	—	S275JR
10	φ4	250	6	0.119	—	S275JR
11	D10	1860	2	2.685	—	S275JR
計				42.911		
製品重量				1187 kg		


平面図

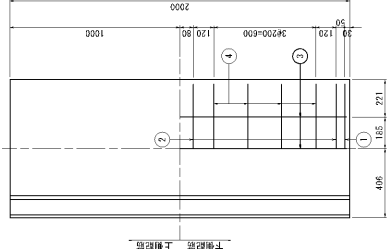


縦断加工図

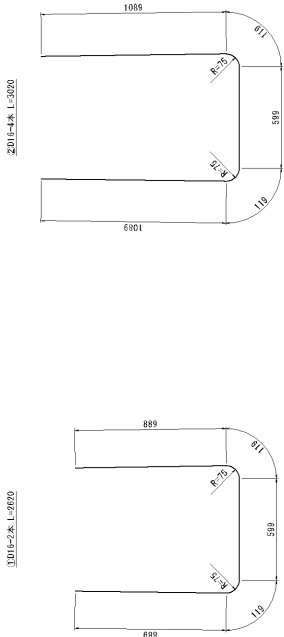


側面図

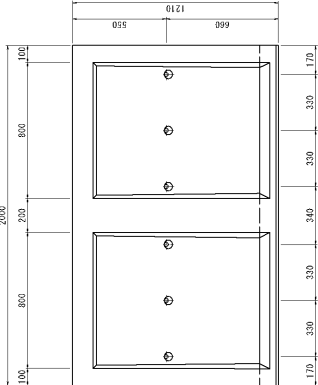

断面図



側面図

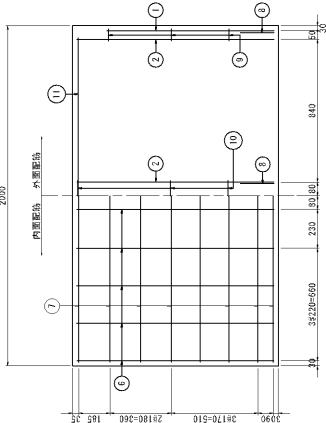


ワイドフリューム H1100xB700

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	2720	2	8.466	□	S275JR
2	D16	3120	4	19.469	□	S275JR
3	D6	1860	3	1.464	—	S275JR
4	D6	660	8	1.713	—	S275JR
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S275JR
7	D6	1860	16	7.859	—	S275JR
8	D10	290	8	1.299	—	S275JR
9	φ4	140	12	0.168	—	S275JR
10	φ4	250	6	0.119	—	S275JR
11	D10	1860	2	2.683	—	S275JR
計				44.955		
製品重量			1239	kg		


平面図

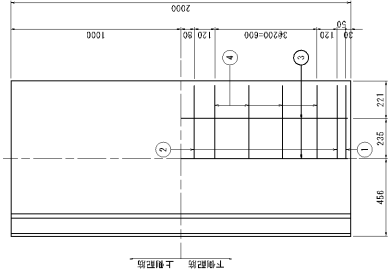


200φ4-4本 L=3120




300φ4-2本 L=2720




縦筋加工図

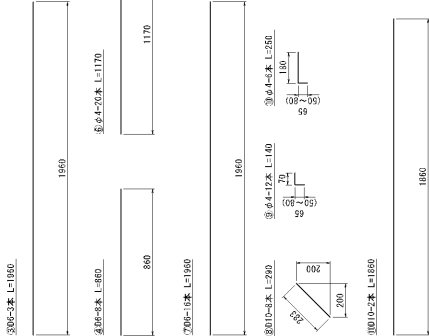


側面図

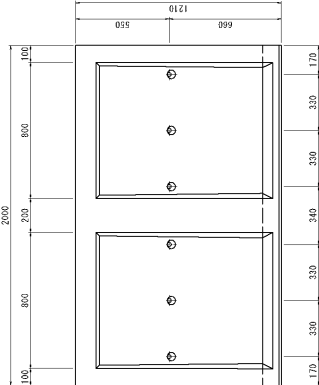

断面図



側面図

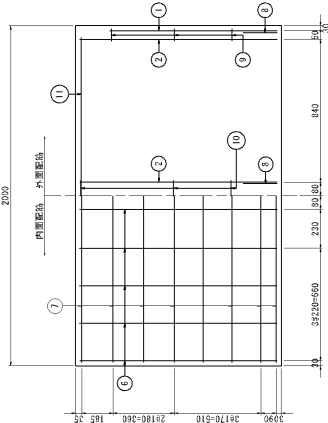


ワイドフレーム H1100xB800

2-115


材料表 (一本当り)

種類	N.º	径	長さ	本数	重量	形状	材質
鉄	1	φ16	2820	2	8.798	□	S47C5A
	2	φ16	3220	4	20.093	□	S47C5A
	3	φ6	1860	4	1.852	—	S47C5A
	4	φ6	1860	8	1.812	—	S47C5A
	5	—	—	—	—	—	—
	6	φ4	1170	20	2.317	—	S47C5A
	7	φ6	1860	16	7.859	—	S47C5A
	8	φ10	2960	8	1.299	—	S47C5A
	9	φ4	140	12	0.168	—	S47C5A
	10	φ4	250	6	0.119	—	S47C5A
	11	φ10	1860	2	2.683	—	S47C5A
鋁							
計					46.579		
製品重量					1290 kg		


平面図

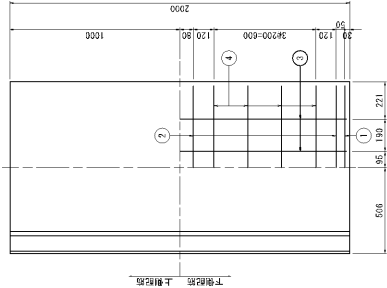


縁加工図

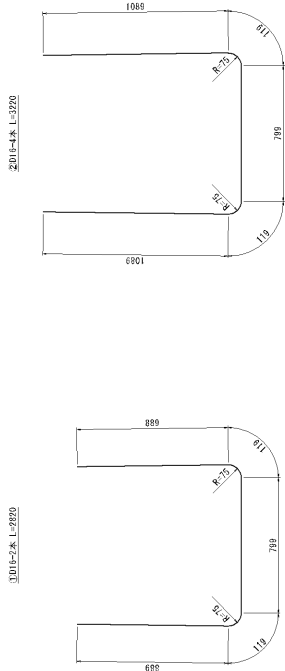


側面図

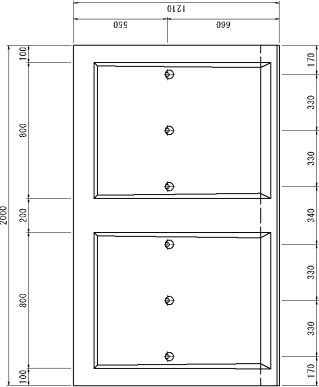

断面図



側面図

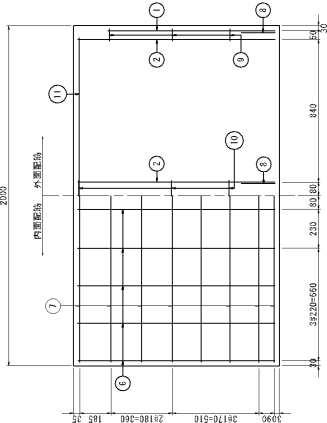


ワイドフレーム H1100xB900

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	2820	2	9.110	□	S47FSA
2	D16	3320	4	20.717	□	S47FSA
3	D6	1860	4	1.852	—	S47FSA
4	D6	1090	8	2.111	—	S47FSA
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S47FSA
7	D6	1860	16	7.859	—	S47FSA
8	D10	2960	8	1.299	—	S47FSA
9	φ4	140	12	0.168	—	S47FSA
10	φ4	250	6	0.119	—	S47FSA
11	D10	1860	2	2.683	—	S47FSA
計				47.712		
製品重量				1342 kg		


平面図

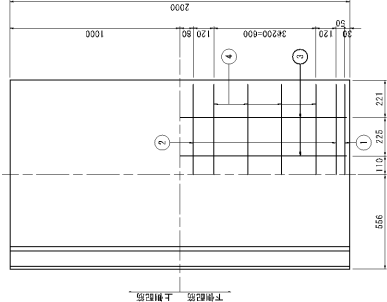


縦筋加工図

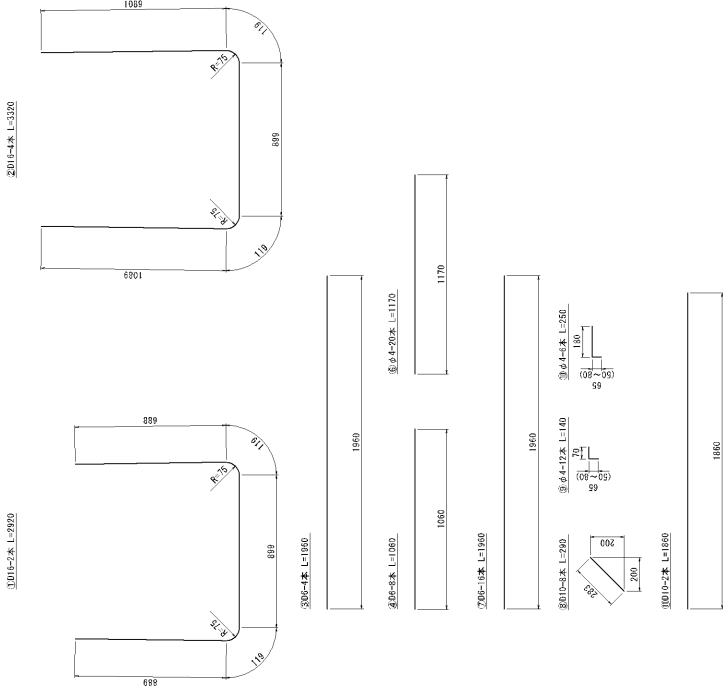


側面図

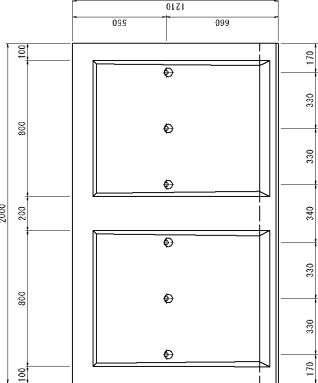

断面図



側面図





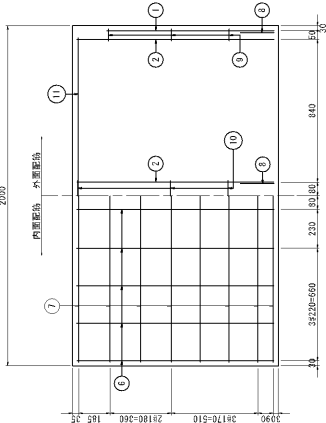


ワイドフレーム H1100xB1000

$$S=1:15$$

材料表 (一本当り)

類別	N	O	型	号	式	(mm)	本数	重量 (kg)	形状	材質
鐵	1	016	3020	2	9.422	—	—	—	□	SPZ15A
	2	016	3420	4	21.341	—	—	—	□	SPZ15A
	3	05	1960	4	1.852	—	—	—	—	SPZ15A
	4	05	1660	4	2.311	—	—	—	—	SPZ15A
	5	—	—	—	—	—	—	—	—	—
	6	6.4	1170	20	2.317	—	—	—	—	SPZ15A
鐵	7	05	1960	16	7.599	—	—	—	—	SPZ15A
	8	010	2960	8	1.259	—	—	—	—	SPZ15A
	9	6.4	140	12	0.169	—	—	—	—	SPZ15A
	10	6.4	255	6	0.148	—	—	—	—	SPZ15A
	11	010	1860	2	2.083	—	—	—	—	SPZ15A
	計	—	—	—	—	—	—	—	—	—
製造標準	1304						kg			

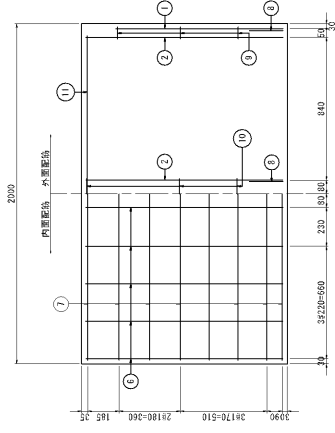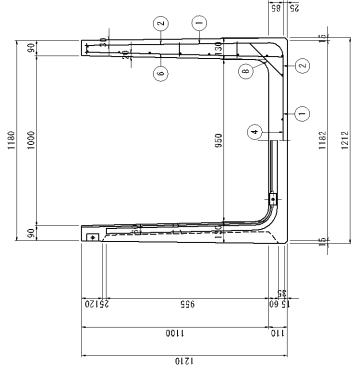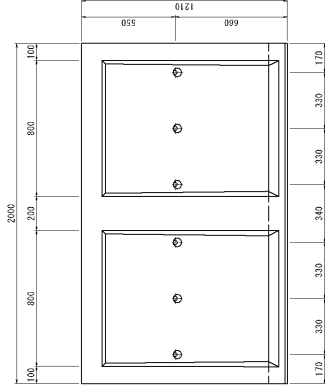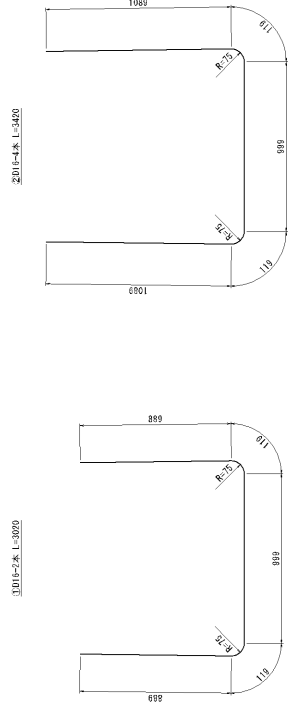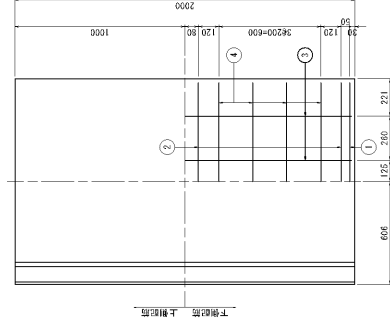


ワイドフレーム H1100xB1100

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3120	2	9.724	□	S47FSA
2	D16	3520	4	21.865	□	S47FSA
3	D6	1860	5	2.440	—	S47FSA
4	D6	1260	8	2.510	—	S47FSA
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S47FSA
7	D6	1860	16	7.859	—	S47FSA
8	D10	2960	8	1.299	—	S47FSA
9	φ4	140	12	0.168	—	S47FSA
10	φ4	250	6	0.119	—	S47FSA
11	D10	1860	2	2.683	—	S47FSA
計				50.472		
製品重量				1446 kg		


平面図

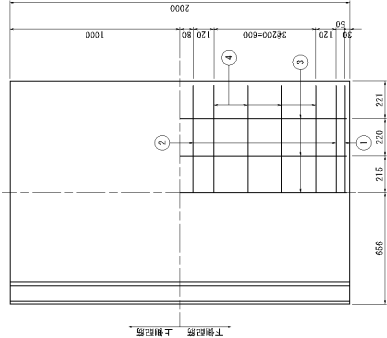


縁加工図

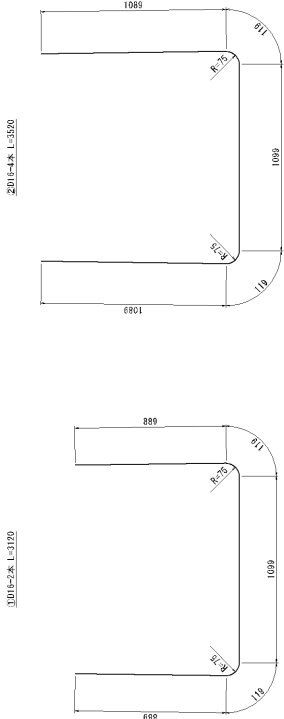


側面図

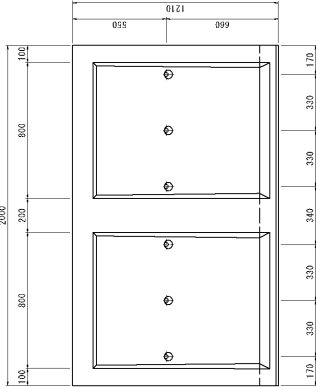

断面図

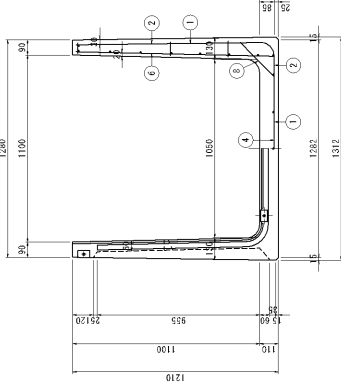

側面図

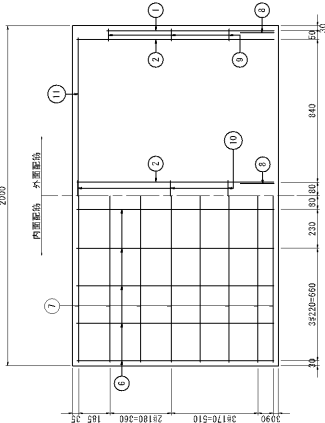


ワイドフレーム H1100xB1200

$$S=1:15$$


材料表 (一本当り)

類別 No	徑	量	式	本數 (個)	量	形	材
1	D16	3220	2	10,436	—	—	3B235A
2	D16	3920	4	22,589	—	□	3B235A
3	D5	1960	5	2,440	—	—	3B235A
4	D5	1360	8	2,719	—	—	3B235A
5	—	—	—	—	—	—	—
6	φ4	1170	20	2,317	—	—	3B235A
7	D5	1960	16	7,559	—	—	3B235A
8	D10	2960	8	1,259	—	—	3B235A
9	φ4	140	12	6,166	—	—	3B235A
10	φ4	253	6	1,019	—	—	3B235A
11	D10	1860	2	2,683	—	—	3B235A
計				51,901			
總重量				1457	kg		


平面图

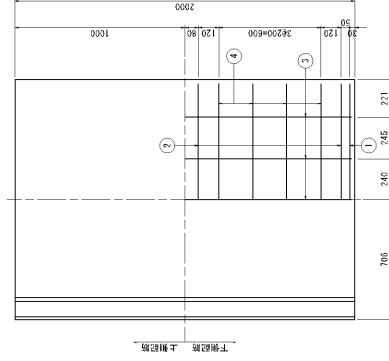


側面図

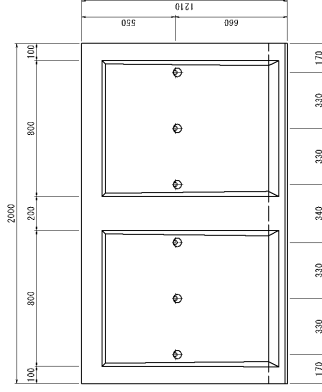


断面図

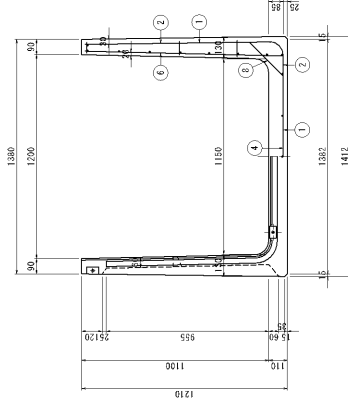

側面図

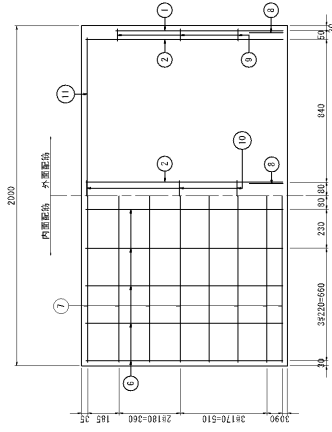

鉄筋加工図

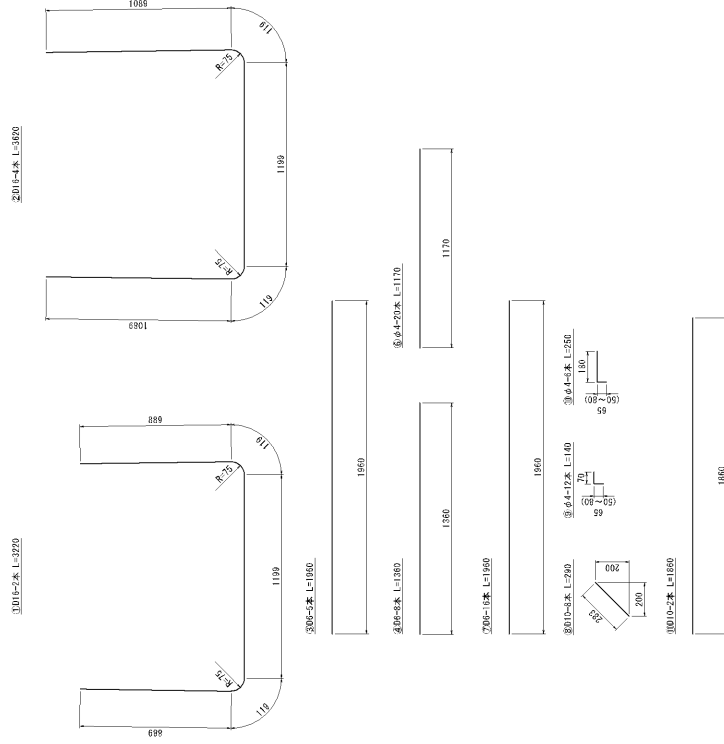


ワイドフレーム H1100xB1300

$$S=1:15$$


材料表 (一本当り)

類別 No	徑	量	式	本數	量	形	材	質
			(mm)		(kg)			
1	D16	3320	2	10,358	—	—	—	52215A
2	D16	3720	4	23,213	—	—	—	52215A
3	D5	1960	5	2,440	—	—	—	52215A
4	D5	1460	8	2,408	—	—	—	52215A
5	—	—	—	—	—	—	—	—
6	φ4	1170	20	2,317	—	—	—	52215A
7	D5	1960	16	7,559	—	—	—	52215A
8	D10	2960	8	1,850	—	—	—	52215A
9	φ4	140	12	6,169	—	—	—	52215A
10	φ4	253	6	4,149	—	—	—	52215A
11	D10	1860	2	2,623	—	—	—	52215A
計				52,742				
總重量			1549	kg				


平面图

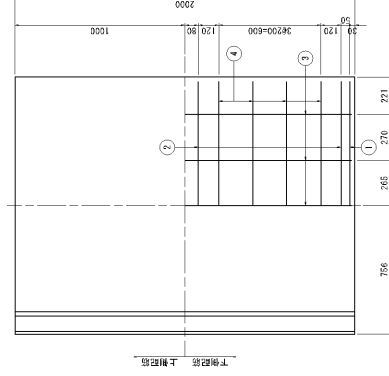


側面図

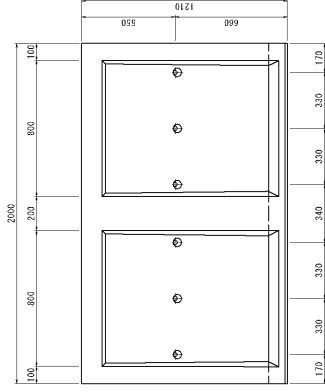


断面図

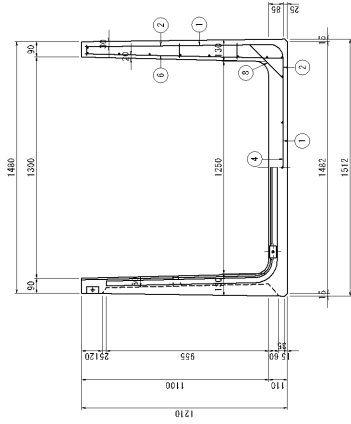

側面圖

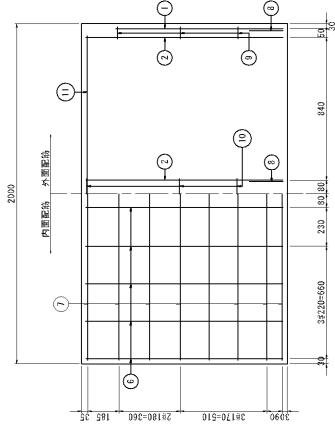

鉄筋加工図

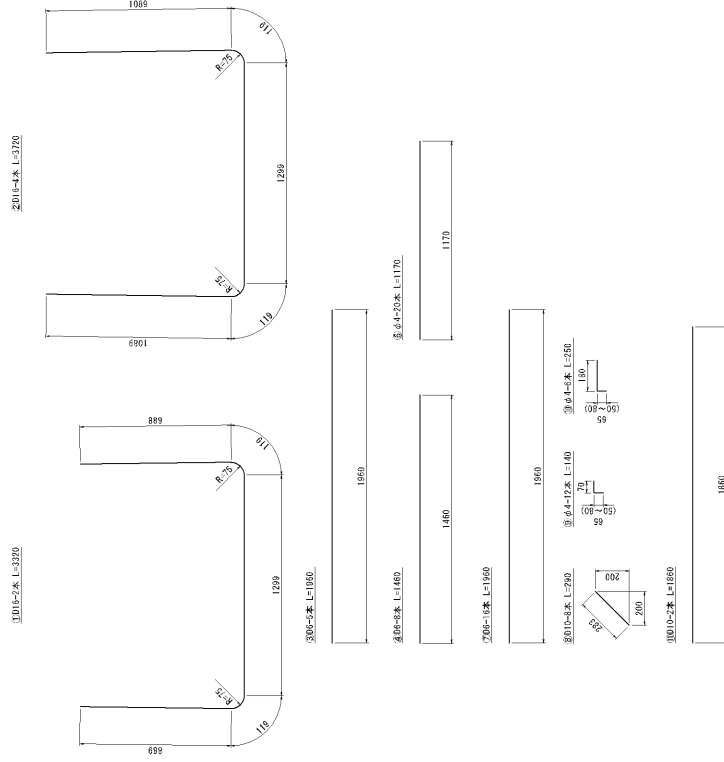


ワイドフレーム H1100xB1400

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3420	2	10.670	□	S47F5A
2	D16	3820	4	23.837	□	S47F5A
3	D6	1860	6	2.828	—	S47F5A
4	D6	1500	8	3.108	—	S47F5A
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S47F5A
7	D6	1860	16	7.859	—	S47F5A
8	D10	2960	8	1.299	—	S47F5A
9	φ4	140	12	0.168	—	S47F5A
10	φ4	250	6	0.119	—	S47F5A
11	D10	1860	2	2.683	—	S47F5A
計				54.266		
製品重量			1601	kg		


平面図

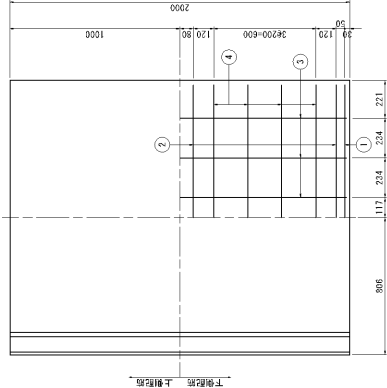


縁加工図

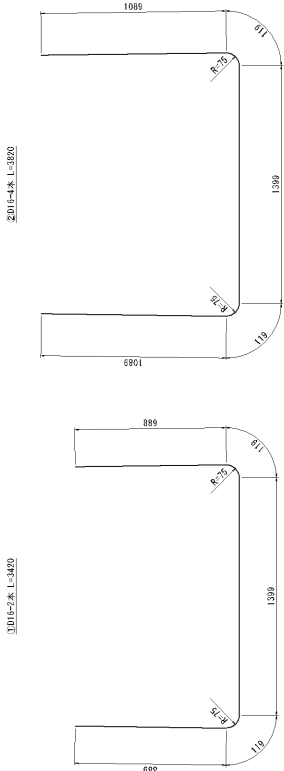


側面図

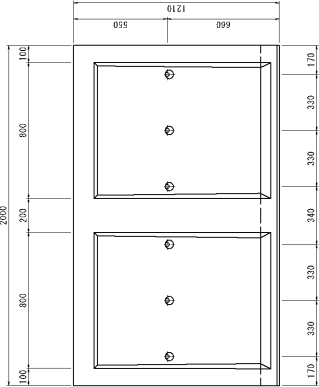

断面図

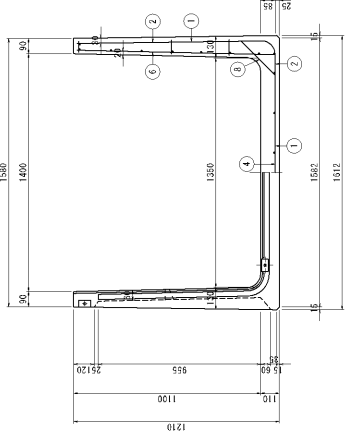

側面図





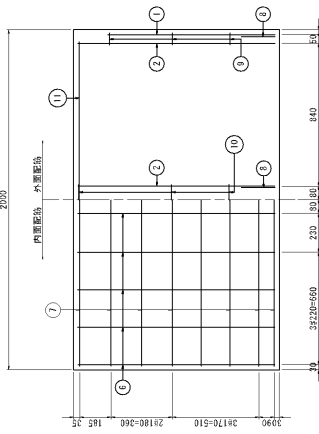


ワイドフレーム H1100xB1500

515

材料表 (一本当り)

種別	№	定	量	本数	重量 (g)	形状	材質
磁	1	D16	3520	2	10,492	□	SD215A
	2	D16	3920	4	24,461	□	SD215A
	3	D5	1960	5	2,328	—	SD215A
	4	D5	1660	8	3,307	—	SD215A
	5	—	—	—	—	—	—
	6	64	1170	20	2,317	—	SD215A
	7	D5	1960	16	7,959	—	SD215A
	8	D10	2950	8	1,299	—	SD215A
	9	64	140	12	6,166	—	SD215A
	10	64	2950	6	6,149	—	SD215A
	11	D10	1960	2	2,083	—	SD215A
計							
合計					55.501		

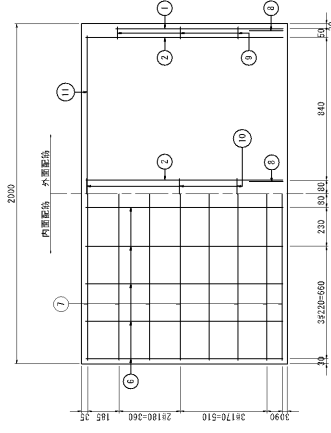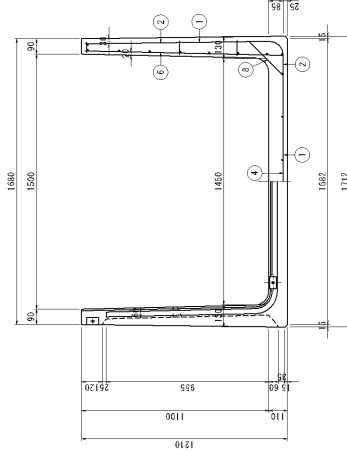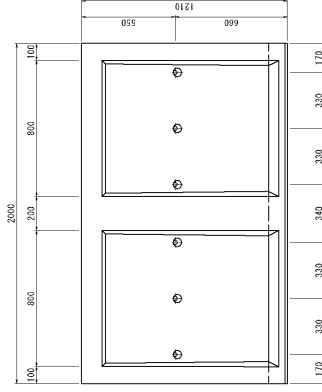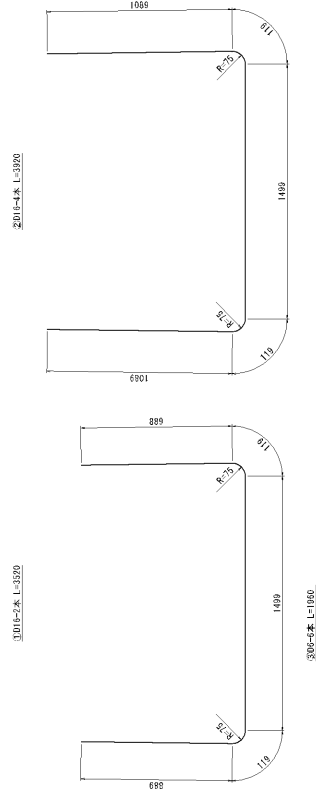
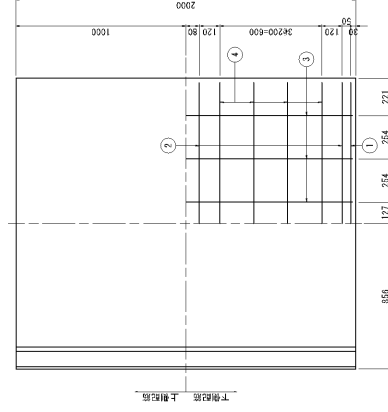


ワイドフレーム H1100xB1600


$$S=1:15$$

材料表 (一本当り)


類別 No	徑	量	式	本數	量	形	材
			(mm)	(kg)			
1	D16	3820	2	11.394	—	—	3R2P5A
2	D16	4020	4	25.085	—	—	3R2P5A
3	D5	1960	6	2.628	—	—	3R2P5A
4	D5	1760	8	3.556	—	—	3R2P5A
5	—	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	—	3R2P5A
7	D5	1960	16	7.599	—	—	3R2P5A
8	D10	2950	8	1.259	—	—	3R2P5A
9	φ4	140	12	0.169	—	—	3R2P5A
10	φ4	253	6	0.418	—	—	3R2P5A
11	D10	1860	2	2.628	—	—	3R2P5A
計				58.536			

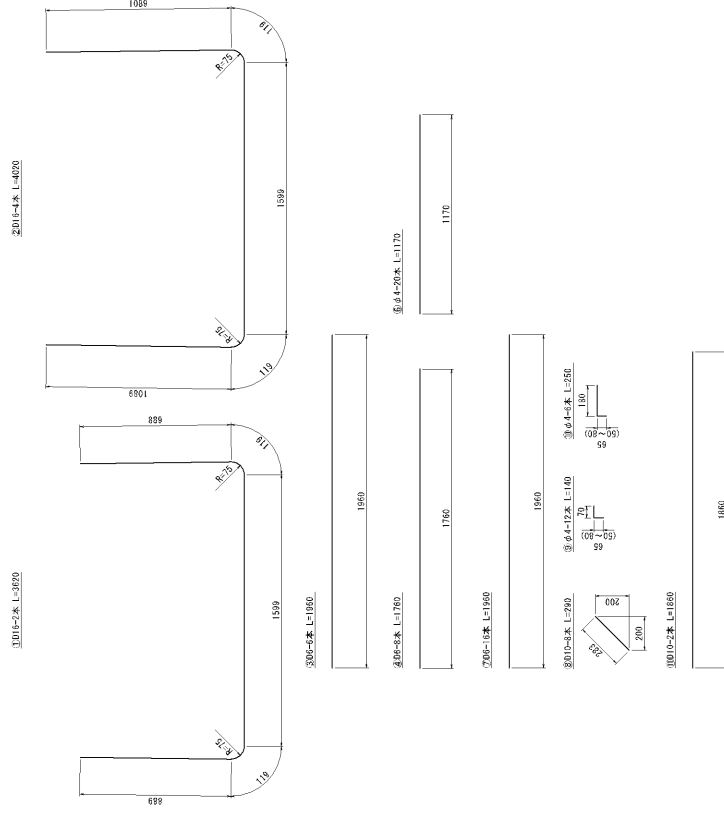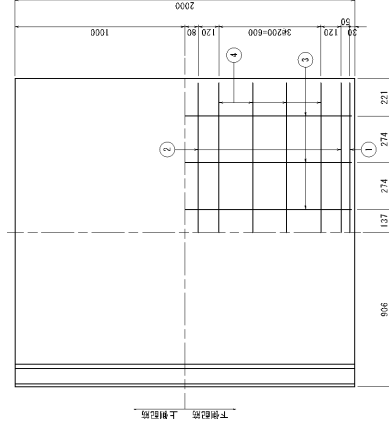


側面図

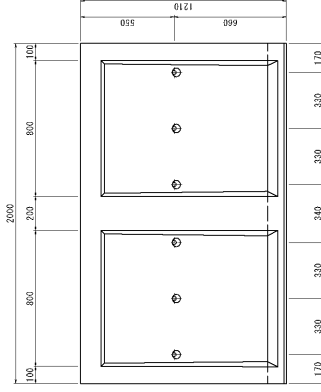

断面図

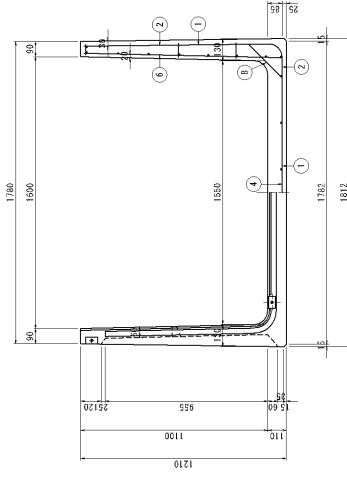

側面図

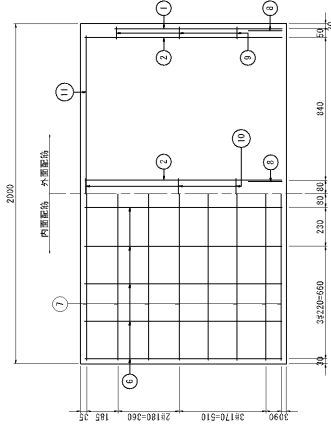


ワイドフレーム H1100xB1700

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3720	2	11.606	□	S115A
2	D16	4120	4	25.709	□	S115A
3	D6	1960	7	5.416	—	S115A
4	D6	1860	8	5.705	—	S115A
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S115A
7	D6	1960	16	7.809	—	S115A
8	D16	290	8	1.269	—	S115A
9	φ4	140	12	0.166	—	S115A
10	φ4	250	6	0.119	—	S115A
11	D16	1860	2	2.483	—	S115A
計				58.259		
製品重量				1756 kg		


平面図

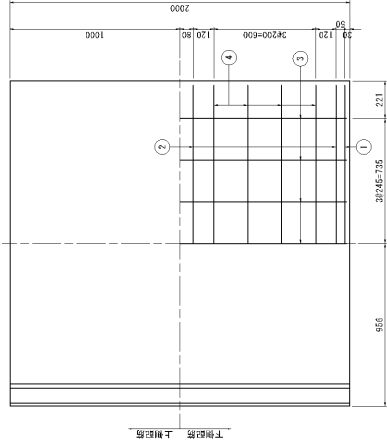


鉄筋加工図

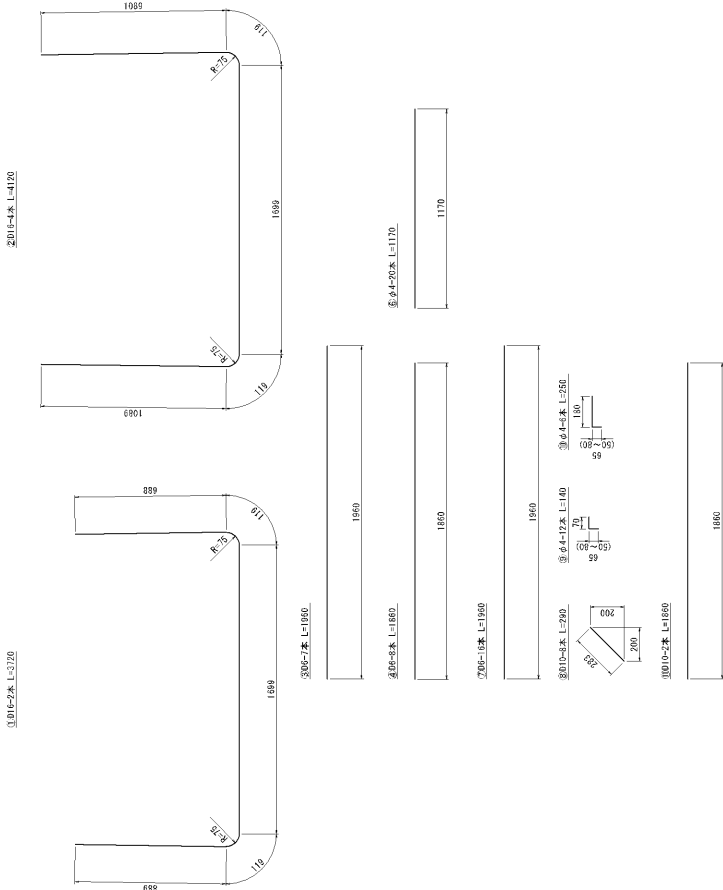


側面図

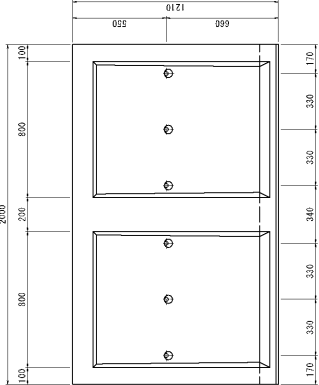

断面図

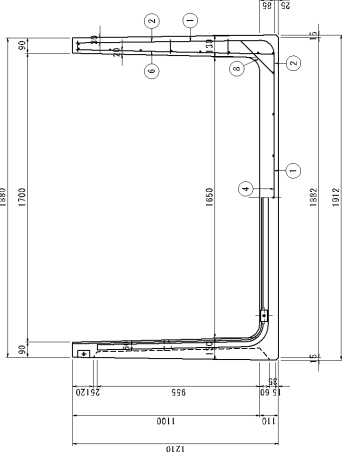

側面図

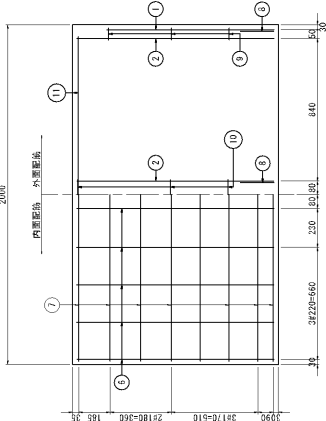


ワイドフレーム H1100xB1900


$$S=1:15$$

材 料 表 (一本当り)				
通 用 N 号	重 量 (g)	本 数	形 状	材 質
1 D15	3920	2	□	S31513
2 D15	4320	4	□	S31513
3 D6	1990	7	□	S31513
4 D6	2090	8	—	S31513
5 D6	2090	8	—	S31513
6 D4	2090	2	—	S31513
7 D4	2090	2	—	S31513
8 D4	2090	2	—	S31513
9 D6	1990	8	—	S31513
10 D6	2090	8	—	S31513
11 D6	1990	2	—	S31513
12 D6	1990	2	—	S31513
13 D6	1990	2	—	S31513
14 D6	1990	2	—	S31513
15 D6	1990	2	—	S31513
16 D6	1990	2	—	S31513
17 D6	1990	2	—	S31513
18 D6	1990	2	—	S31513
19 D6	1990	2	—	S31513
20 D6	1990	2	—	S31513
21 D6	1990	2	—	S31513
22 D6	1990	2	—	S31513
23 D6	1990	2	—	S31513
24 D6	1990	2	—	S31513
25 D6	1990	2	—	S31513
26 D6	1990	2	—	S31513
27 D6	1990	2	—	S31513
28 D6	1990	2	—	S31513
29 D6	1990	2	—	S31513
30 D6	1990	2	—	S31513
31 D6	1990	2	—	S31513
32 D6	1990	2	—	S31513
33 D6	1990	2	—	S31513
34 D6	1990	2	—	S31513
35 D6	1990	2	—	S31513
36 D6	1990	2	—	S31513
37 D6	1990	2	—	S31513
38 D6	1990	2	—	S31513
39 D6	1990	2	—	S31513
40 D6	1990	2	—	S31513
41 D6	1990	2	—	S31513
42 D6	1990	2	—	S31513
43 D6	1990	2	—	S31513
44 D6	1990	2	—	S31513
45 D6	1990	2	—	S31513
46 D6	1990	2	—	S31513
47 D6	1990	2	—	S31513
48 D6	1990	2	—	S31513
49 D6	1990	2	—	S31513
50 D6	1990	2	—	S31513
51 D6	1990	2	—	S31513
52 D6	1990	2	—	S31513
53 D6	1990	2	—	S31513
54 D6	1990	2	—	S31513
55 D6	1990	2	—	S31513
56 D6	1990	2	—	S31513
57 D6	1990	2	—	S31513
58 D6	1990	2	—	S31513
59 D6	1990	2	—	S31513
60 D6	1990	2	—	S31513
61 D6	1990	2	—	S31513
62 D6	1990	2	—	S31513
63 D6	1990	2	—	S31513
64 D6	1990	2	—	S31513
65 D6	1990	2	—	S31513
66 D6	1990	2	—	S31513
67 D6	1990	2	—	S31513
68 D6	1990	2	—	S31513
69 D6	1990	2	—	S31513
70 D6	1990	2	—	S31513
71 D6	1990	2	—	S31513
72 D6	1990	2	—	S31513
73 D6	1990	2	—	S31513
74 D6	1990	2	—	S31513
75 D6	1990	2	—	S31513
76 D6	1990	2	—	S31513
77 D6	1990	2	—	S31513


材料表 (一本当り)

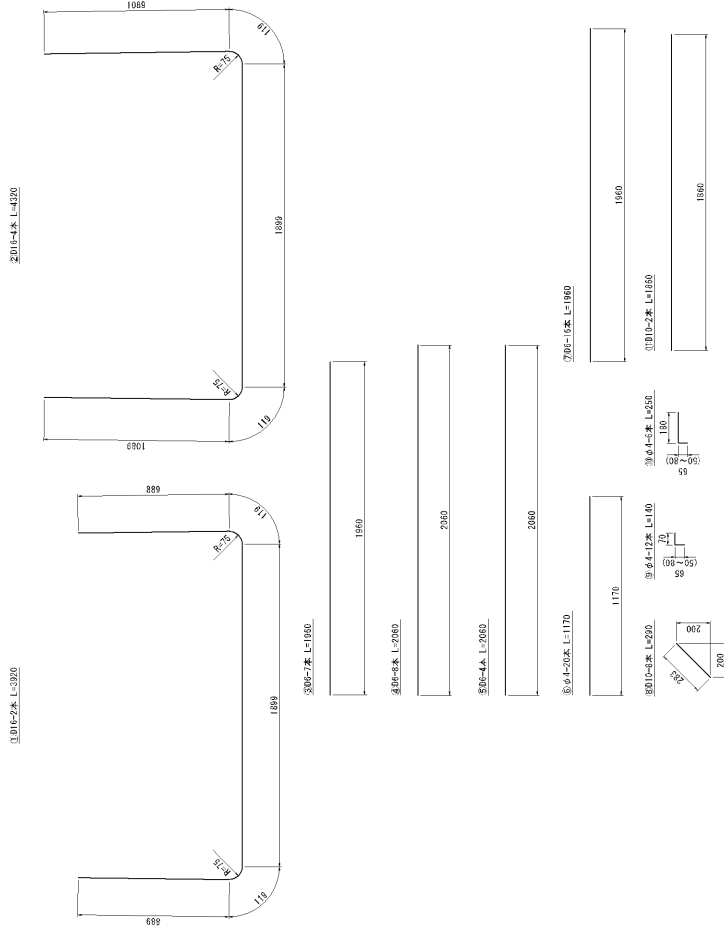


側面圖

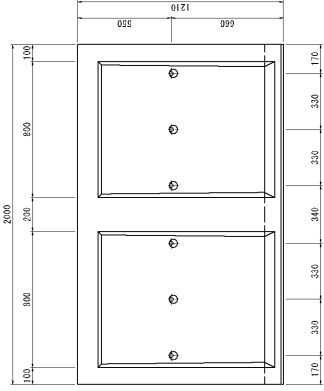

断面图

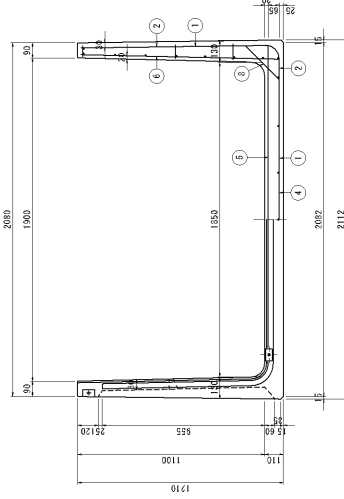

側面図

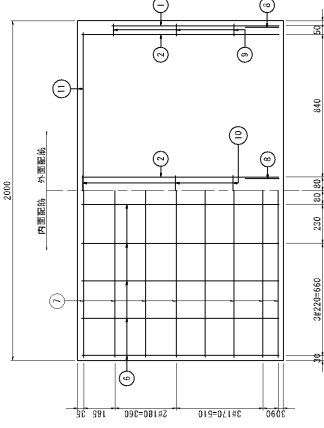


ワイドフレーム H1100xB2000

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	4020	2	12.542	□	S1115A
2	D16	4420	4	27.551	□	S1115A
3	B6	1960	8	3.904	—	S1115A
4	B6	2160	8	4.303	—	S1115A
5	B6	2160	4	2.151	—	S2255A
6	φ4	1170	20	2.317	—	S1215A
7	B6	1960	16	7.809	—	S1215A
8	D16	2960	8	1.269	—	S1215A
9	φ4	140	12	0.166	—	S1215A
10	φ4	250	6	0.119	—	S1215A
11	D16	1860	2	2.083	—	S1215A
計				64.304		
製品重量			1911	kg		


平面図

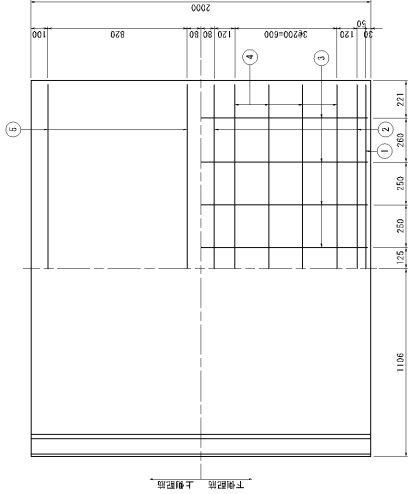


鉄筋加工図

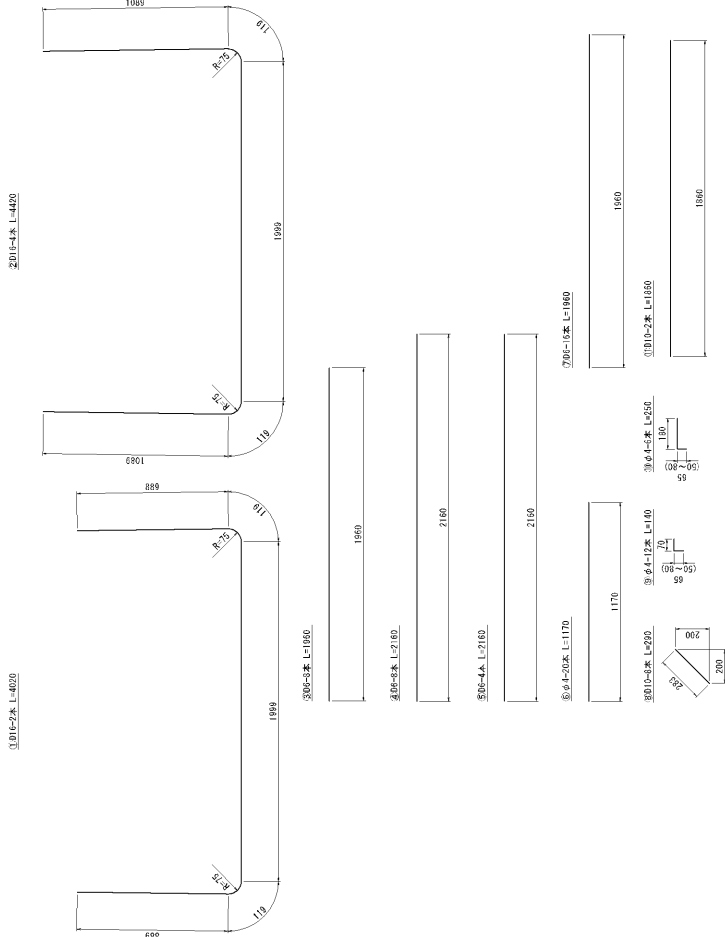


側面図

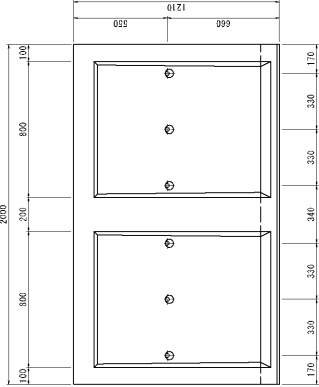

断面図

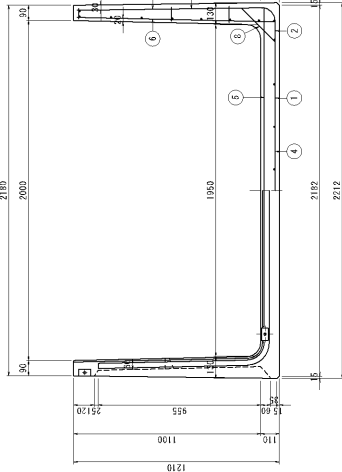

側面図

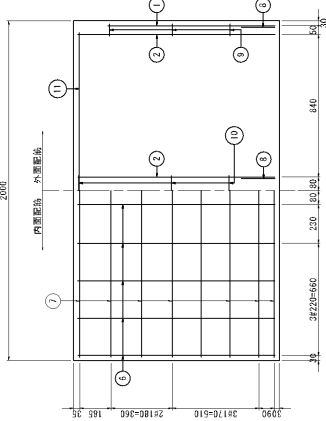


ワイドフレーム H1100xB2100

2-1 15


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	4120	2	12.654	□	S1115A
2	D16	4520	4	28.205	□	S1115A
3	D16	1960	8	6.761	—	S1115A
4	D6	2260	8	4.502	—	S1115A
5	D6	2260	4	2.251	—	S0255A
6	φ4	1170	20	2.317	—	S1215A
7	D6	1960	16	7.809	—	S1215A
8	D16	290	8	1.269	—	S1215A
9	φ4	140	12	0.166	—	S1215A
10	φ4	260	6	0.119	—	S1215A
11	D16	1860	2	2.083	—	S1215A
計				70.416		
製品重量			1863	kg		


平面図

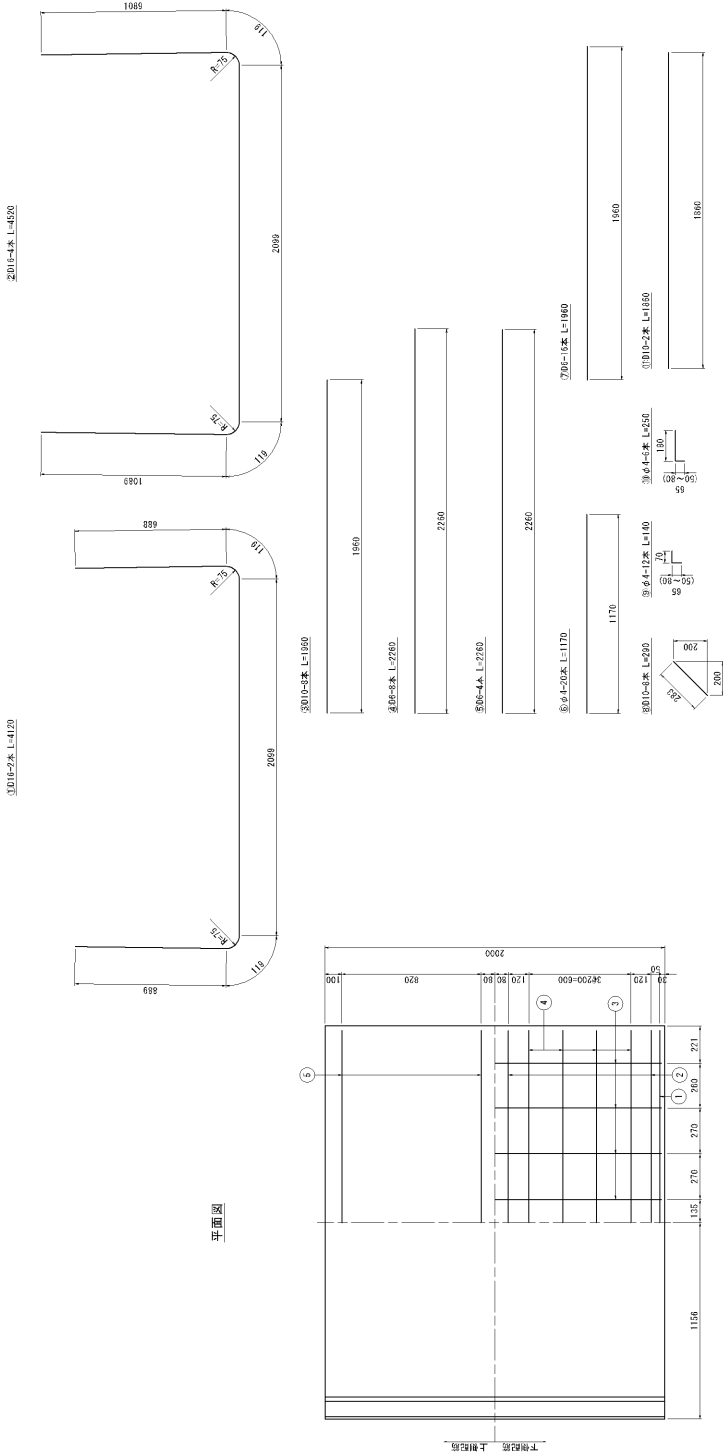


側面図

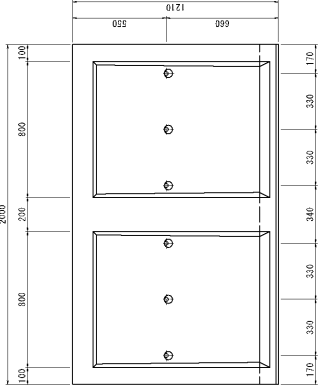


断面図

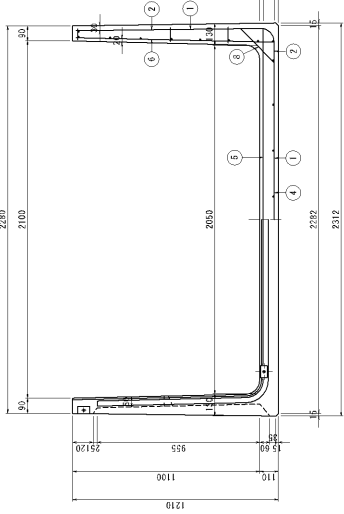

側面図

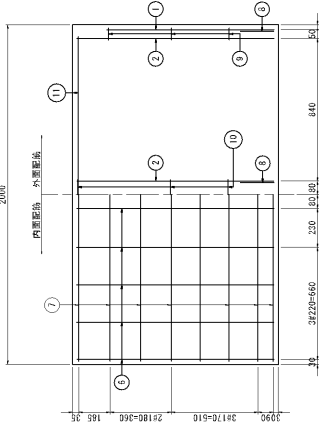

板加工図

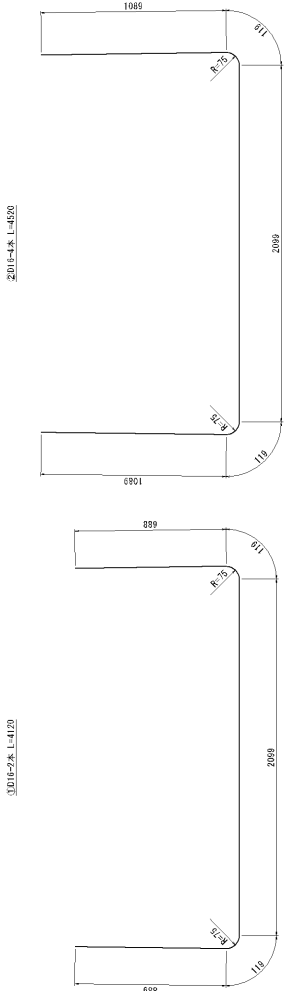


ワイドフレーム H1100xB2200

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	4220	2	15.166	□	S1115A
2	D16	4620	4	26.829	□	S1115A
3	D16	1960	8	6.761	—	S1115A
4	D6	2360	8	4.701	—	S1115A
5	D6	2360	4	2.351	—	S1225A
6	φ4	1170	20	2.317	—	S1215A
7	D6	1960	16	7.809	—	S1215A
8	D16	290	8	1.269	—	S1215A
9	φ4	140	12	0.166	—	S1215A
10	φ4	280	6	0.119	—	S1215A
11	D16	1860	2	2.683	—	S1215A
計				71.651		
製品重量			2014	kg		


平面図

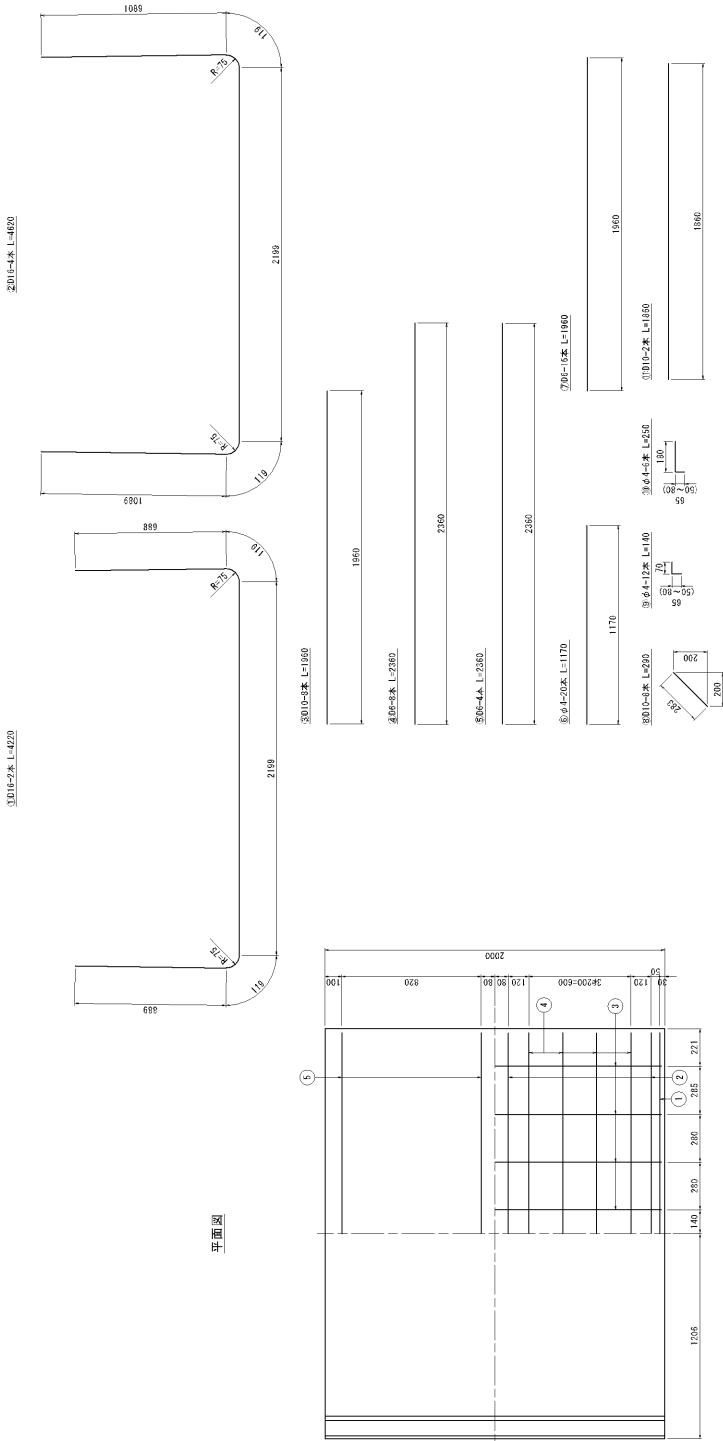


側面図

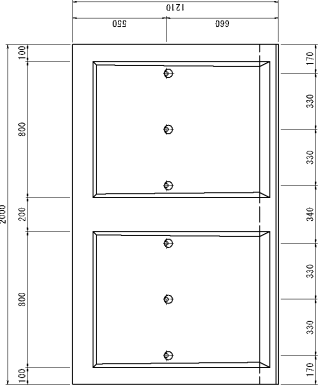


断面図

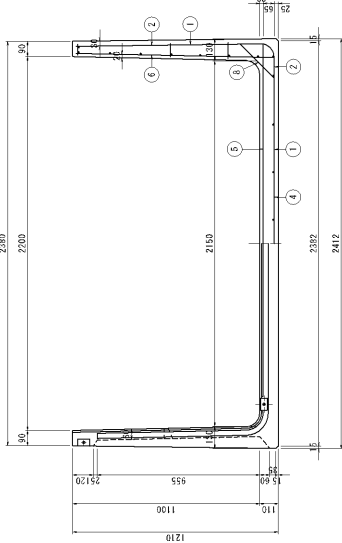

側面図

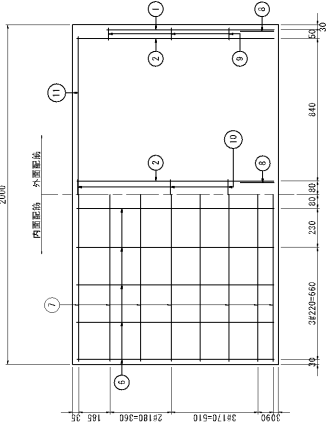

板加工図

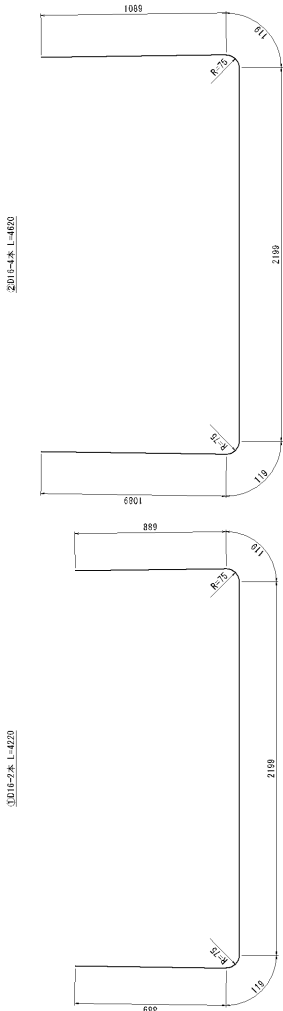


ワイドフレーム H1200xB700

3=1 20


材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数	質量 (kg)	形状	材質
1	φ16	2890	2	9.329	U	S275SA
2	φ16	3330	4	20.779	U	S275SA
3	φ6	1800	3	1.464	—	S275SA
4	φ6	870	8	1.733	—	S275SA
5	—	—	—	—	—	—
6	φ4	1760	20	2.495	—	S275SA
7	φ6	1860	16	7.839	—	S275SA
8	φ10	300	8	1.344	—	S275SA
9	φ4	140	12	0.166	—	S275SA
10	φ4	250	6	0.149	—	S275SA
11	φ10	1860	2	2.103	—	S275SA
計				42.551		
部品質量			1339	kg		


平面図




300φ×2本 L=2900




200φ×4本 L=3330




300φ×3本 L=1950




200φ×8本 L=870



200φ×20本 L=1760



200φ×11本 L=1950



200φ×3本 L=309




200φ×12本 L=140




200φ×4本 L=256




200φ×2本 L=1860




側面図



断面図



側面図




ワイドフレーム H1200xB800

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 1/c	重量 kg	形状	材質
1	B16	3090	2	9.641	—	U	S225SA
2	B16	3430	4	21.403	—	U	S225SA
3	B6	1800	4	1.897	—	—	S225SA
4	B6	1700	8	1.937	—	—	S225SA
5	—	—	—	—	—	—	—
6	φ4	1700	20	2.495	—	—	S225SA
7	B6	1800	16	7.839	—	—	S225SA
8	B10	3000	8	1.344	—	—	S225SA
9	φ4	1400	12	0.168	—	—	S225SA
10	φ4	2500	6	0.149	—	—	S225SA
11	B10	1800	2	2.053	—	—	S225SA
計					48.974		
総重量			1382	kg			


平面図




縦筋加工図

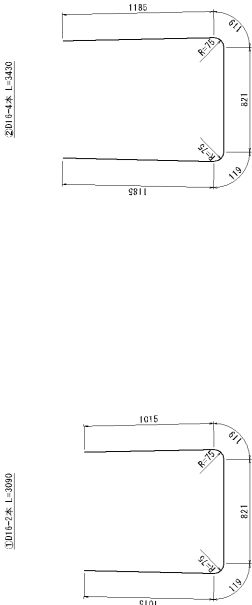


側面図



断面図



側面図




ワイドフレーム H1200xB900

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 (1/c)	重量 (kg)	形状	材質
1	Ø16	3190	2	9.853	—	□	S275SA
2	Ø16	3530	4	22.027	—	□	S275SA
3	Ø6	1800	4	1.897	—	—	S275SA
4	Ø6	1070	8	2.131	—	—	S275SA
5	—	—	—	—	—	—	—
6	Ø4	1760	20	2.495	—	—	S275SA
7	Ø6	1860	16	7.839	—	—	S275SA
8	Ø10	300	8	1.344	—	—	S275SA
9	Ø4	140	12	0.168	—	—	S275SA
10	Ø4	250	6	0.149	—	—	S275SA
11	Ø10	1860	2	2.053	—	—	S275SA
計					50.109		
部品重量			1433	kg			


平面図



3000-2本 L=3190



2000-4本 L=3530




3000-1本 L=1960



2000-8本 L=1070



2000-11本 L=1960




8000-3本 L=309




8000-12本 L=140




8000-4本 L=256




30000-2本 L=1860




側面図



断面図



側面図




ワイドフレーム H1200xB1000

3-1 10


材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数 (1/c)	重量 (kg)	形状	材質
1	φ16	3290	2	10.265	U	S225SA
2	φ16	3630	4	22.851	U	S225SA
3	φ6	1860	4	1.892	—	S225SA
4	φ6	1170	8	2.331	—	S225SA
5	—	—	—	—	—	—
6	φ4	1260	20	2.495	—	S225SA
7	φ6	1860	16	7.839	—	S225SA
8	φ10	360	8	1.344	—	S225SA
9	φ4	140	12	0.166	—	S225SA
10	φ4	250	6	0.149	—	S225SA
11	φ10	1860	2	2.053	—	S225SA
計				51.245		
部品重量			1485 kg			


平面図




縁加工図

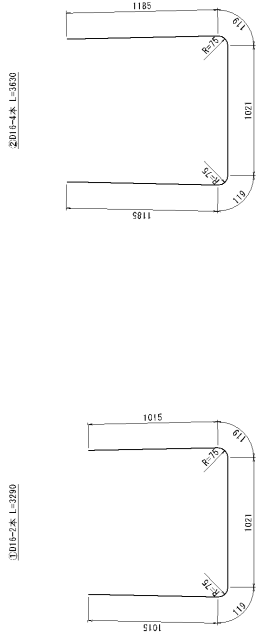


側面図



断面図



側面図






ワイドフレーム H1200xB1100

3=1 20

材料表 (一本当り)

番号	N.º	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
軸	1	816	330	2	16.577	□	S205A
	2	816	3730	4	23.275	□	S205A
	3	86	1860	6	2.440	□	S205A
	4	86	1770	8	2.530	□	S205A
	5	—	—	—	—	—	—
軸	6	84	1260	20	2.495	—	S205A
	7	86	1860	16	7.839	—	S205A
	8	810	300	8	1.344	—	S205A
	9	84	140	12	0.166	—	S205A
	10	84	250	6	0.149	—	S205A
	11	810	1860	2	2.103	—	S205A
計						52.589	
部品重量						1537	kg

平面図




3006-2本 L=3390


2006-4本 L=3720

縁加工図


側面図



断面図



側面図




ワイドフレーム H1200xB1200

3=1/20

縁加工図

300F-2本 L=3400


200F-4本 L=3820

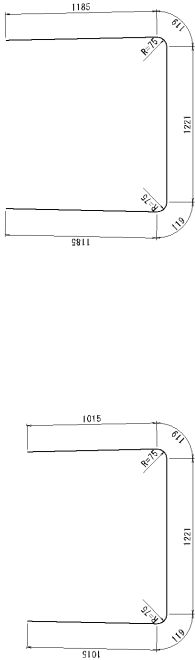

平面図

材料表 (一本当り)

番号	N.º	径	厚	寸法	本数	重量	形状	材質
1	B16	3400	2	10.819	2	10.819	U	S225SA
2	B16	3820	4	23.819	4	23.819	U	S225SA
3	B6	1800	6	2.440	6	2.440	—	S225SA
4	B6	1270	8	2.773	8	2.773	—	S225SA
5	—	—	—	—	—	—	—	—
6	φ4	1200	20	2.495	20	2.495	—	S225SA
7	B6	1800	16	7.819	16	7.819	—	S225SA
8	B10	300	8	1.344	8	1.344	—	S225SA
9	φ4	140	12	0.166	12	0.166	—	S225SA
10	φ4	250	6	0.149	6	0.149	—	S225SA
11	B10	1800	2	2.053	2	2.053	—	S225SA
計						54.000		
部品重量				1888	kg			



300F-5本 L=1950

1940

200F-8本 L=1370

1270

200F-11本 L=1900

1940

800F-3本 L=309


800F-4本 L=382

800F-5本 L=456


800F-7本 L=680

1860


側面図



断面図



側面図




ワイドフレーム H1200xB1300

3=1/20


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 [枚]	重量 [kg]	形状	材質
1	B16	3500	2	11.201	—	U	S275SA
2	B16	3500	4	24.523	—	U	S275SA
3	B6	1800	6	2.440	—	—	S275SA
4	B6	1400	8	2.032	—	—	S275SA
5	—	—	—	—	—	—	—
6	φ4	1200	20	2.495	—	—	S275SA
7	B6	1800	16	7.039	—	—	S275SA
8	B10	300	8	1.344	—	—	S275SA
9	φ4	140	12	0.166	—	—	S275SA
10	φ4	250	6	0.149	—	—	S275SA
11	B10	1800	2	2.033	—	—	S275SA
計					55.128		
部品重量			1640	kg			


平面図




側面図



断面図




側面図




縁加工図


300φ×2本 L=3500




200φ×4本 L=3500




300φ×2本 L=1950



200φ×8本 L=1470



200φ×1本 L=1950



800φ×3本 L=300




800φ×12本 L=140



800φ×4本 L=250



300φ×2本 L=1850




ワイドフレーム H1200xB1400

3-1 10


材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3000	2	U	S275SA
2	φ16	4030	4	U	S275SA
3	φ6	1800	6	—	S275SA
4	φ6	1570	8	—	S275SA
5	—	—	—	—	—
6	φ4	1760	20	—	S275SA
7	φ6	1860	16	—	S275SA
8	φ10	300	8	—	S275SA
9	φ4	140	12	—	S275SA
10	φ4	250	6	—	S275SA
11	φ10	1860	2	—	S275SA
計					
部品重量			1682	kg	
			55.781		


平面図




縁加工図

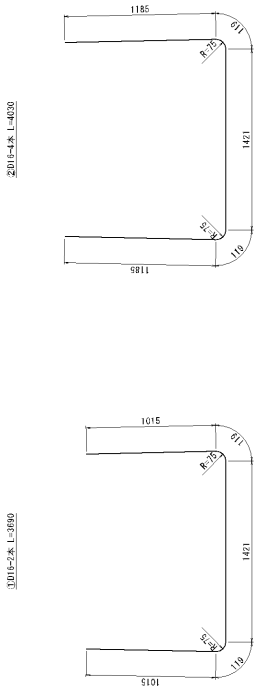


3000-2本 L=1950



2000-8本 L=1570



2000-11本 L=1560




800-3本 L=300




φ6.4-12本 L=140




φ6.4-20本 L=1760




2000-2本 L=1860




側面図



断面図



側面図




ワイドフレーム H1200xB1600

3-1 10


材料表 (一本当り)

材料	品番	長さ (mm)	太さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	816	380	2	12.137	□	S225A
	2	816	4230	4	26.395	□	S225A
	3	86	1800	6	2.828	—	S225A
	4	86	1770	8	3.518	—	S225A
	5	—	—	—	—	—	—
	6	84	1260	20	2.495	—	S225A
	7	86	1860	16	7.839	—	S225A
	8	810	300	8	1.344	—	S225A
	9	84	140	12	0.168	—	S225A
	10	84	250	6	0.149	—	S225A
	11	810	1860	2	2.053	—	S225A
計						59.622	
部品重量						1785	kg


平面図




側面図



断面図




側面図




縁加工図


300φ×2本 L=3890




200φ×4本 L=4220




300φ×2本 L=1950



200φ×8本 L=1770



200φ×1本 L=1950



800φ×3本 L=309




800φ×12本 L=140



800φ×4本 L=256



300φ×2本 L=1860




ワイドフレーム H1200xB1700

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	016	390	2	12.449	—	□	S275SA
2	016	4330	4	27.019	—	□	S275SA
3	06	180	7	3.416	—	□	S275SA
4	06	180	8	3.725	—	□	S275SA
5	010	180	4	4.193	—	—	S275SA
6	04	120	20	2.495	—	—	S275SA
7	06	180	16	7.839	—	—	S275SA
8	010	300	8	1.344	—	—	S275SA
9	04	140	12	0.166	—	—	S275SA
10	04	250	6	0.149	—	—	S275SA
11	010	180	2	2.103	—	—	S275SA
計					54.544		
部品重量			1847	kg			


平面図




側面図




断面図




側面図




縁加工図

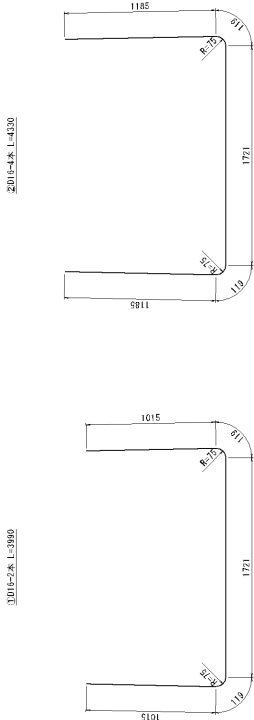


300-7本 L=1090




200-8本 L=1870



500-4本 L=1270



700-16本 L=1660




900-3本 L=300




9.84-12本 L=140



9.84-12本 L=250



1000-2本 L=1860




ワイドフレーム H1200xB1800

3-1120


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 (1/c)	数量	形状	材質
1	B16	4090	2	12.781	—	U	S275SA
2	B16	4430	4	27.843	—	U	S275SA
3	B6	1800	7	3.418	—	—	S275SA
4	B6	1970	8	3.924	—	—	S275SA
5	B10	1970	4	4.413	—	—	S275SA
6	φ4	1260	20	2.495	—	—	S275SA
7	B6	1860	16	7.839	—	—	S275SA
8	B10	300	8	1.344	—	—	S275SA
9	φ4	140	12	0.168	—	—	S275SA
10	φ4	250	6	0.149	—	—	S275SA
11	B10	1860	2	2.103	—	—	S275SA
計					56.920		
部品重量			1889	kg			


平面図

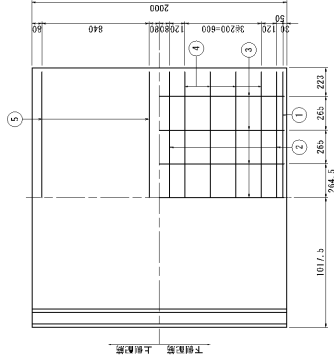


縁加工図

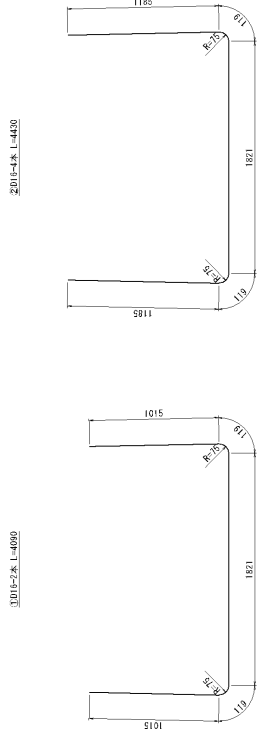


側面図



断面図

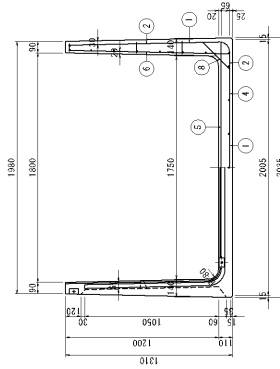

側面図






ワイドフレーム H1200xB1900


S=1:20

材料表 (一本当り)	種別	N ₀	径 (mm)	長さ (mm)	重量 (kg)	形状	材質
鉄	1	B6	4500	2	13.073	□	S235MA
	2	B6	4550	4	25.267	□	S235MA
	3	B6	1860	7	3.416	—	S235MA
	4	B9	2070	8	4.121	—	S235MA
	5	D0	2070	4	4.537	—	S235MA
	6	E4	1260	20	2.495	—	S235MA
	7	B9	1860	16	7.599	—	S235MA
	8	D0	300	8	1.344	—	S235MA
	9	E4	140	12	0.186	—	S235MA
	10	E4	250	6	0.149	—	S235MA
	11	D0	1860	2	2.033	—	S235MA
計					57.562		


材料表 (一本当り)

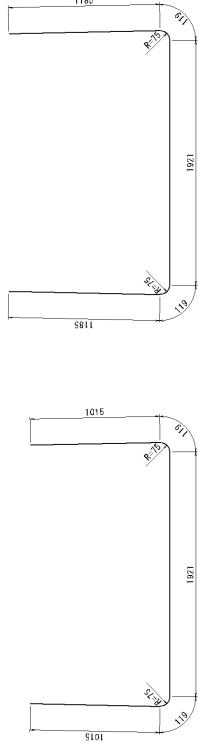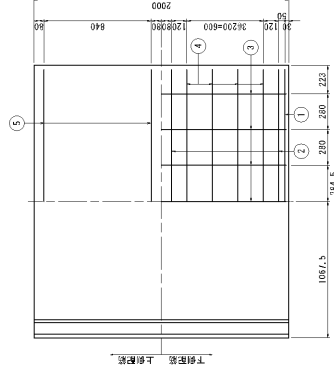


側面図



断面図

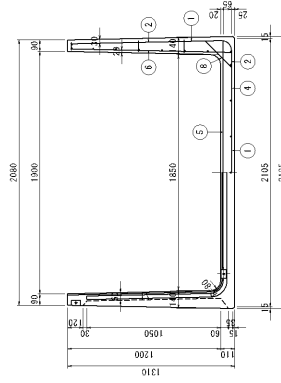

側面図




ワイドフレーム H1200xB2000

3-1 10


材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	4790	2	13.355	U	S275SA
2	φ16	4630	4	25.891	U	S275SA
3	φ6	1860	8	3.934	—	S275SA
4	φ6	2170	8	4.323	—	S275SA
5	φ10	2170	4	4.561	—	S275SA
6	φ4	1760	20	2.495	—	S275SA
7	φ6	1860	16	7.839	—	S275SA
8	φ10	300	8	1.344	—	S275SA
9	φ4	140	12	0.166	—	S275SA
10	φ4	250	6	0.149	—	S275SA
11	φ10	1860	2	2.103	—	S275SA
計				59.410		
部品重量			2002	kg		


平面図

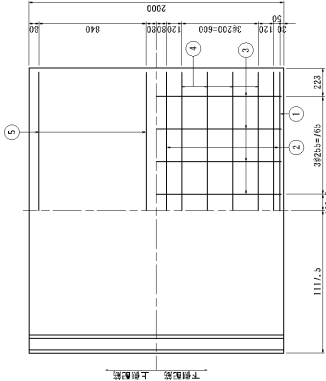


縁加工図

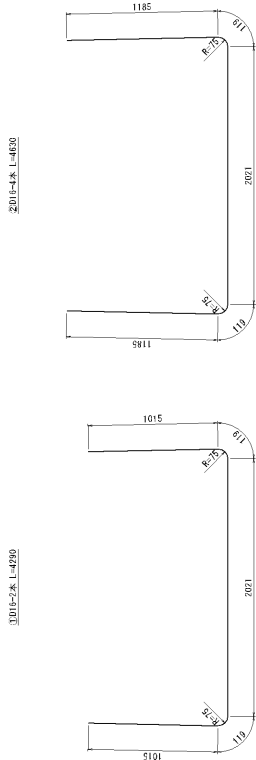


側面図



断面図

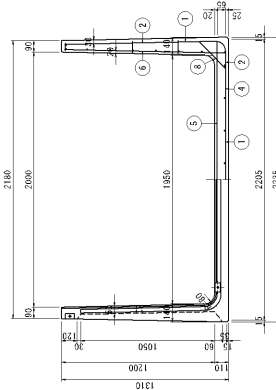

側面図




ワイドフレーム H1200xB2200

3-1 10

鉄筋加工図

①D16-2本 L=4400


2D16-4本 L=4820

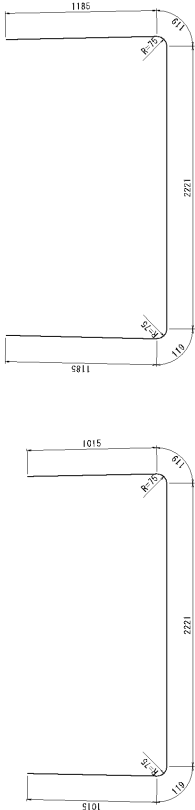


平面図

材料表 (一本当り)


番号	規格	長さ	断面	本数	重量 (kg)	形状	材質
鉄	1	B16	4480	2	14.039	□	S235SA
	2	D16	4820	4	30.139	□	S235SA
	3	B6	1860	8	3.994	—	S235SA
	4	D6	2270	8	4.721	—	S235SA
	5	D10	2270	4	5.339	—	S235SA
鋁	6	φ4	1200	20	2.495	—	S235SA
	7	B6	1860	16	7.899	—	S235SA
	8	D10	300	8	1.344	—	S235SA
	9	φ4	140	12	0.168	—	S235SA
	10	φ4	250	6	0.149	—	S235SA
	11	D10	1860	2	2.053	—	S235SA
計					72.128		
総重量					2105	kg	

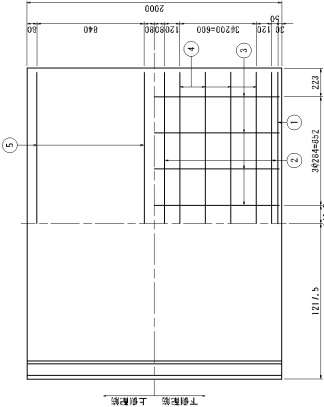


側面図



断面図

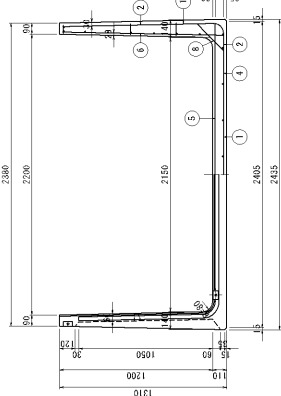

側面図





ワイドフレーム H1200xB2300

3-1 10


材料表 (一本当り)

規格 No.	径 (mm)	長さ (mm)	本数	質量 (kg)	形状	材質
1	φ16	4590	2	14.321	□	S275SA
2	φ16	4830	4	30.783	□	S275SA
3	φ6	1800	9	4.339	—	S275SA
4	φ6	2400	8	4.339	—	S275SA
5	φ10	2400	4	5.533	—	S275SA
6	φ4	1760	20	2.495	—	S275SA
7	φ6	1860	16	7.839	—	S275SA
8	φ10	3000	8	1.344	—	S275SA
9	φ4	1400	12	0.168	—	S275SA
10	φ4	2500	6	0.149	—	S275SA
11	φ10	1860	2	2.103	—	S275SA
計				73.975		
部品質量			2157	kg		


平面図

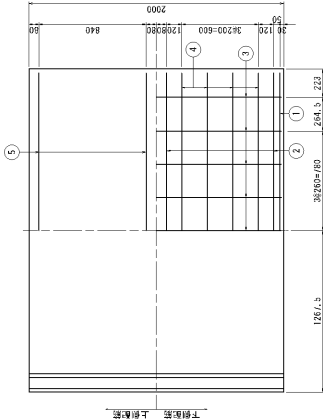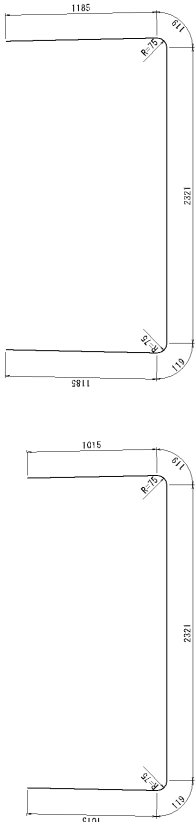


300φ-2本 L=1950



200φ-8本 L=2470



250φ-4本 L=2470



200φ-20本 L=1260



80φ-3本 L=300



9.8φ-12本 L=140




10φ-2本 L=1860




1000




側面図



断面図

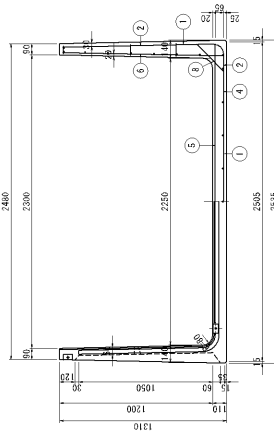

側面図




ワイドフレーム H1200xB2400

3-1 10

鉄筋加工図

①D16-2本 L=4600


2D16-4本 L=5030

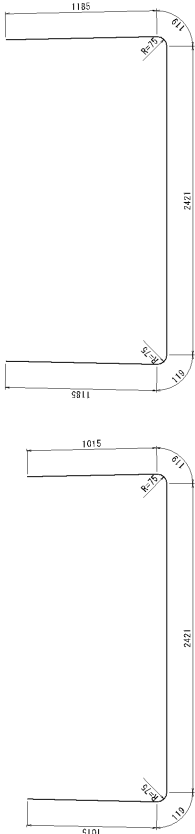

平面図

材料表 (一本当り)

番号	N.º	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	B16	4600	2	14.833		U	S225A
2	B16	5030	4	31.387		U	S225A
3	B6	1800	9	4.397		—	S225A
4	B6	2570	8	5.119		—	S225A
5	D10	2570	4	5.757		—	S225A
6	φ4	1760	20	2.495		—	S225A
7	B6	1800	16	7.839		—	S225A
8	D10	300	8	1.344		—	S225A
9	φ4	140	12	0.168		—	S225A
10	φ4	250	6	0.149		—	S225A
11	D10	1800	2	2.053		—	S225A
計					75.524		
総重量			2209	kg			

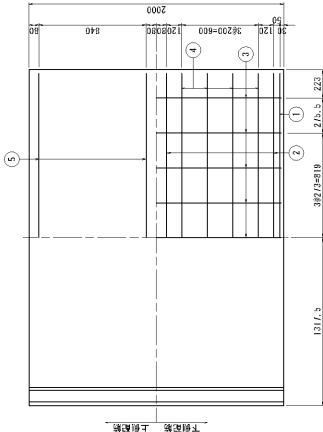

300φ-2本 L=1950

1950

2D16-8本 L=2570

2570

2D16-4本 L=2570

2570

②φ4-20本 L=1260

1260

7D16-1本 L=1850

1850

③D10-3本 L=300

300

④φ4-12本 L=140

140

⑤φ4-4本 L=250


250

⑥D10-2本 L=1800


1800

1000


側面図



断面図

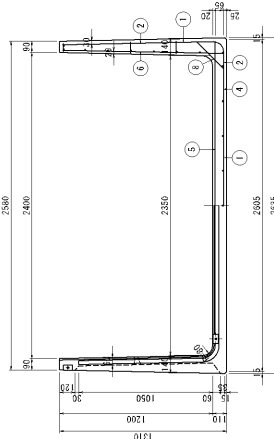

側面図





ワイドフレーム H1300xB800

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 1/cd	数量 1/cd	形状	材質
鉄	1	φ16	3700	2	9.884	U	S225SA
	2	φ16	3620	4	22.859	U	S225SA
	3	φ10	1800	3	3.793	—	S225SA
	4	φ10	800	6	3.175	—	S225SA
	5	—	—	—	—	—	—
鋁	6	φ4	1300	20	2.772	—	S225SA
	7	φ10	1860	16	17.892	—	S225SA
	8	φ10	360	8	1.813	—	S225SA
	9	φ4	150	12	0.178	—	S225SA
	10	φ4	260	6	0.154	—	S225SA
	11	φ10	1860	2	2.053	—	S225SA
	—	—	—	—	—	—	—
計				—	53.713	—	—
総重量				1547	kg	—	—


平面図

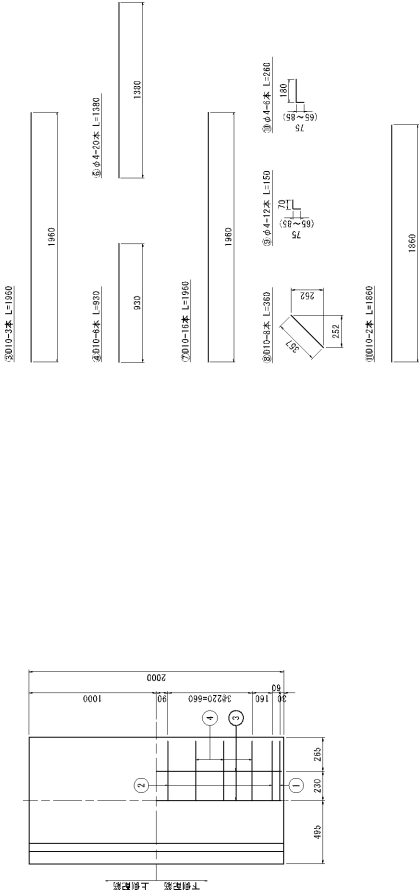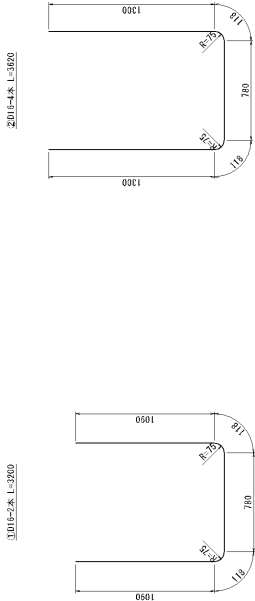

側面図



側面図



縁加工図

3000-2本 L=3620

2000-4本 L=3620


ワイドフレーム H1300xB900

3-1 10


材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3300	2	□	S225SA
2	φ16	3720	4	□	S225SA
3	φ10	1800	3	—	S225SA
4	φ10	1000	6	—	S225SA
5	—	—	—	—	—
6	φ4	1300	20	—	S225SA
7	φ10	1860	16	—	S225SA
8	φ10	360	8	—	S225SA
9	φ4	150	12	—	S225SA
10	φ4	260	6	—	S225SA
11	φ10	1860	2	—	S225SA
計					
総重量			1696	kg	54.555


平面図




3000-2本 L=3800




2000-4本 L=3720




縦筋加工図

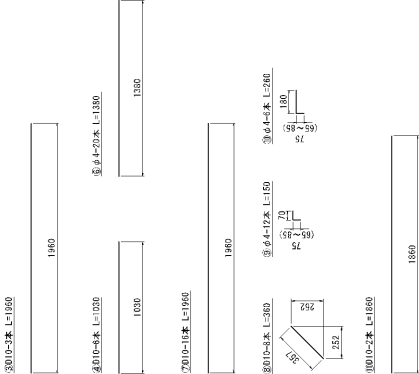


側面図



断面図



側面図






ワイドフレーム H1300xB1000

3-1 10


材料表 (一本当り)

規格 No.	径	長さ (mm)	本数 (1/c)	数量	形状	材質
1	φ16	3400	2	10.608	U	S225SA
2	φ16	3820	4	23.837	U	S225SA
3	φ10	1800	4	4.390	—	S225SA
4	φ10	1130	6	3.797	—	S225SA
5	—	—	—	—	—	—
6	φ4	1390	20	2.712	—	S225SA
7	φ10	1860	16	17.682	—	S225SA
8	φ10	360	8	1.613	—	S225SA
9	φ4	150	12	0.178	—	S225SA
10	φ4	260	6	0.154	—	S225SA
11	φ10	1860	2	2.053	—	S225SA
計				56.954		
総重量			1665 kg			


平面図

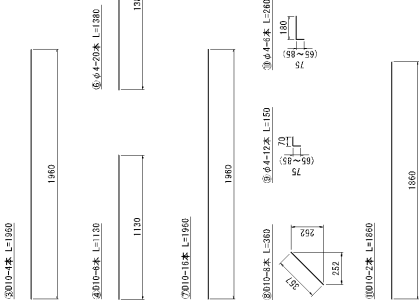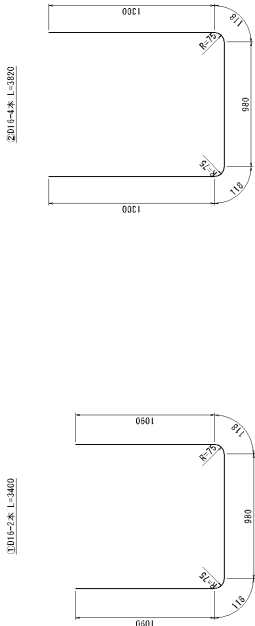


側面図



断面図



側面図




ワイドフレーム H1300xB1100

3=1 120


材料表 (一本当り)

規格 No.	径 (mm)	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3500	2	10, 920	S225SA
2	φ16	3920	4	24, 481	S225SA
3	φ10	1800	4	4, 130	S225SA
4	φ10	1200	6	4, 133	S225SA
5	—	—	—	—	—
6	φ4	1300	20	2, 712	S225SA
7	φ10	1860	16	17, 582	S225SA
8	φ10	360	8	1, 413	S225SA
9	φ4	150	12	0, 178	S225SA
10	φ4	260	6	0, 154	S225SA
11	φ10	1860	2	2, 103	S225SA
計				55, 126	
総重量		11724	kg		


平面図




側面図




断面図




側面図



縁加工図

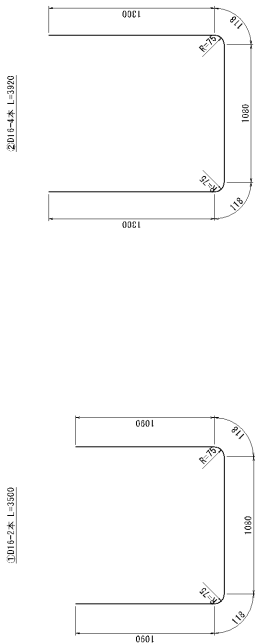


3000=2本 L=1900



2000=4本 L=1200



2700=10本 L=1960



3600=3本 L=380




⑧φ4=12本 L=150



⑨φ4=2本 L=280




3000=2本 L=1860



ワイドフレーム H1300xB1200

3-1 10


総加工図

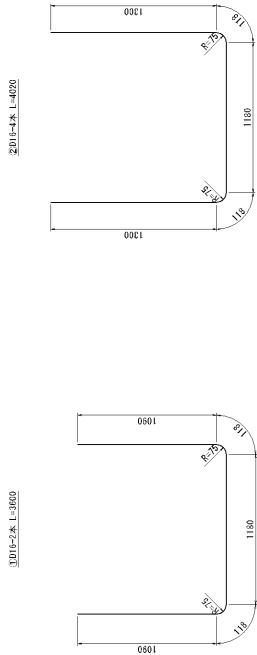


平面図

材料表 (一本当り)


部材 No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	3600	2	11.232	□	S275SA
2	φ16	4020	4	25.055	□	S275SA
3	φ10	1800	4	4.190	—	S275SA
4	φ10	1300	6	4.469	—	S275SA
5	—	—	—	—	—	—
6	φ4	1300	20	2.722	—	S275SA
7	φ10	1800	16	17.582	—	S275SA
8	φ10	360	8	1.413	—	S275SA
9	φ4	150	12	0.178	—	S275SA
10	φ4	260	6	0.154	—	S275SA
11	φ10	1800	2	2.053	—	S275SA
計				59.468		
総重量			1182	kg		




3000-1本 L=1900



2000-4本 L=1300



2000-1本 L=1900



8000-3本 L=380



3000-2本 L=1800




8000-4本 L=150




8000-4本 L=280




側面図



断面図




側面図



ワイドフレーム H1300xB1300

3=120


総加工図

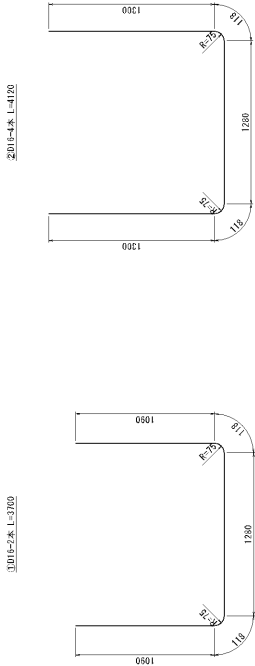

平面図

材料表 (一本当り)

部材 No.	径 (mm)	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3700	2	U	SUS304
2	φ16	4120	4	U	SUS304
3	φ10	1800	6	—	SUS304
4	φ10	1400	6	—	SUS304
5	—	—	—	—	—
6	φ4	1300	20	—	SUS304
7	φ10	1800	16	—	SUS304
8	φ10	360	8	—	SUS304
9	φ4	150	12	—	SUS304
10	φ4	260	6	—	SUS304
11	φ10	1800	2	—	SUS304
計					
総重量			1841 kg		
				71.588	



3000×2本 L=1900

1490

2000×4本 L=1400

1450

1300

2700×10本 L=1960

1490

3000×3本 L=380

252

3000×12本 L=150

252


3000×4本 L=280

252


3000×2本 L=1860

1860


側面図



断面図




側面図



ワイドフレーム H1300xB1400

3-1 10


総加工図

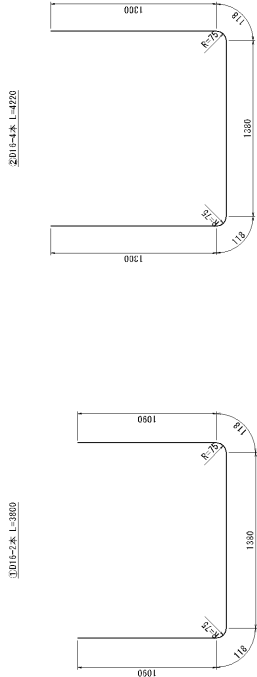


平面図

材料表 (一本当り)

部材 No.	径	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3800	2	U	S225SA
2	φ16	4220	4	U	S225SA
3	φ10	1800	6	—	S225SA
4	φ10	1500	6	—	S225SA
5	—	—	—	—	—
6	φ4	1300	20	—	S225SA
7	φ10	1800	16	—	S225SA
8	φ10	360	8	—	S225SA
9	φ4	150	12	—	S225SA
10	φ4	260	6	—	S225SA
11	φ10	1800	2	—	S225SA
計					
総重量			1800	kg	
			73.140		




3800-2本 L=1900




2600-4本 L=1500




2700-10本 L=1900




3800-3本 L=380




3800-2本 L=1800



側面図



断面図




ワイドフレーム H1300xB1500

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質
縦	1	φ16	3800	2	12.168	□	S225SA
	2	φ16	4320	4	26.957	□	S225SA
	3	φ10	1800	6	5.488	—	S225SA
	4	φ10	1600	6	5.417	—	S225SA
	5	—	—	—	—	—	—
断	6	φ4	1300	20	2.722	—	S225SA
	7	φ10	1860	16	17.692	—	S225SA
	8	φ10	360	8	1.613	—	S225SA
	9	φ4	150	12	0.178	—	S225SA
	10	φ4	260	6	0.154	—	S225SA
	11	φ10	1860	2	2.103	—	S225SA
	—	—	—	—	—	—	—
計				—	74.412	—	—
総重量				1859	kg	—	—


平面図




縦加工図

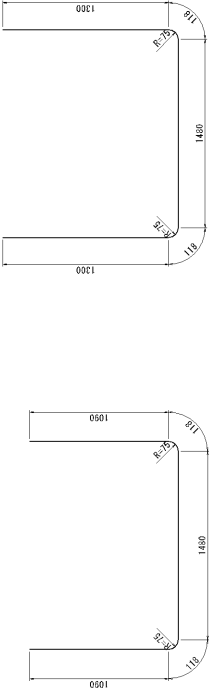


側面図



断面図



側面図




ワイドフレーム H1300xB1600

3-1 10


材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数 (1本)	重量 (kg)	形状	材質
1	φ16	4000	2	12.480	U	S225SA
2	φ16	4420	4	27.551	U	S225SA
3	φ10	1800	6	6.558	—	S225SA
4	φ10	1700	6	5.813	—	S225SA
5	—	—	—	—	—	—
6	φ4	1300	20	2.722	—	S225SA
7	φ10	1860	16	17.582	—	S225SA
8	φ10	360	8	1.613	—	S225SA
9	φ4	150	12	0.178	—	S225SA
10	φ4	260	6	0.154	—	S225SA
11	φ10	1860	2	2.053	—	S225SA
計				76.722		
総重量			2017	kg		

平面図




縁加工図

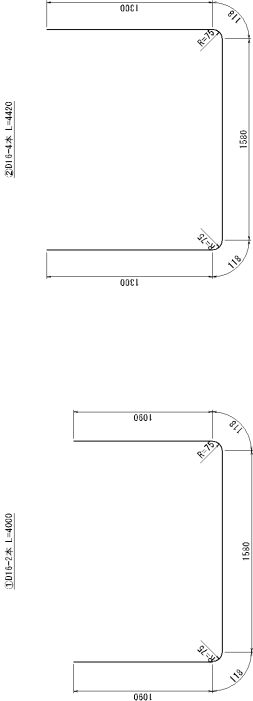


3000-2本 L=1580



2000-4本 L=1380



2700-10本 L=1660




8000-3本 L=380


8000-3本 L=380

8000-3本 L=380


3000-2本 L=1580




側面図



断面図

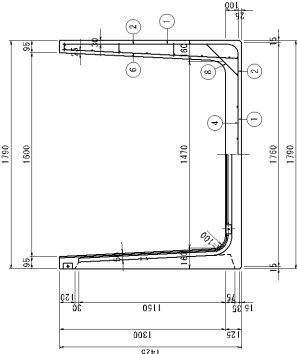

側面図




ワイドフレーム H1300xB1700

3-1 10


材料表 (一本当り)

部材 No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	4100	2	12.792	┐┐	S225SA
2	φ16	4520	4	25.205	┐┐	S225SA
3	φ10	1800	6	6.558	—	S225SA
4	φ10	1830	6	6.149	—	S225SA
5	—	—	—	—	—	—
6	φ4	1390	20	2.722	—	S225SA
7	φ10	1860	16	17.582	—	S225SA
8	φ10	360	8	1.513	—	S225SA
9	φ4	150	12	0.178	—	S225SA
10	φ4	260	6	0.154	—	S225SA
11	φ10	1860	2	2.103	—	S225SA
計				78.654		
部品重量			2076	kg		


平面図




側面図



断面図

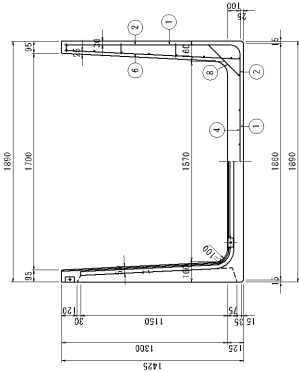


側面図




縁加工図


300φ×2本 L=4100




200φ×4本 L=4520




300φ×2本 L=1960



200φ×4本 L=1580



270φ×10本 L=1960



300φ×3本 L=380




300φ×12本 L=150



300φ×4本 L=280



300φ×2本 L=1680




ワイドフレーム H1300xB1800

 $s=1:20$


材料表 (一本当り)

[illegible]


平面图

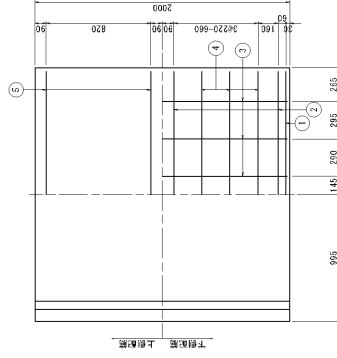


側面図








断面図

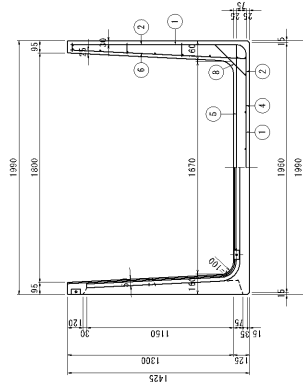

側面図



鉄筋加工図




ワイドフレーム H1300xB1900

3-1 10

材料表 (一本当り)


番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	4400	2	13.728	□	S225A
	2	φ16	4820	4	30.077	□	S225A
	3	φ10	1800	7	7.683	□	S225A
	4	φ10	2000	6	6.821	□	S225A
	5	φ10	2000	4	4.547	□	S225A
鋁	6	φ4	1300	20	2.722	□	S225A
	7	φ10	1800	16	17.682	□	S225A
	8	φ10	360	8	1.613	□	S225A
	9	φ4	150	12	0.178	□	S225A
	10	φ4	260	6	0.154	□	S225A
	11	φ10	1800	2	2.053	□	S225A
計					82.178		
総重量				2184	kg		

平面図

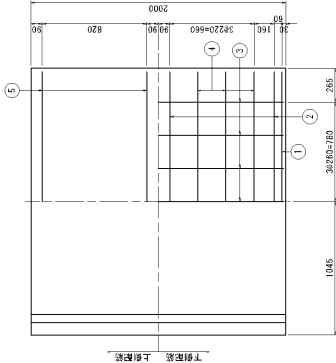


下側面図 上側面図


縁加工図

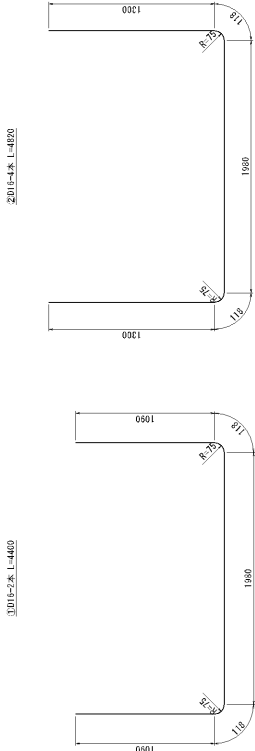


側面図



断面図

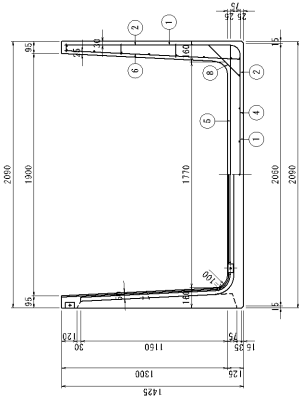

側面図




ワイドフレーム H1300xB2000

5=1:20


材料表 (一本当り)

類別	N°	型	長	寬	厚度	數量	形狀	材質
鐵	1	B16	4500	2	14.40	52025A	U	52025A
	2	B16	4920	4	30.70	52025A	U	52025A
	3	B16	1660	7	7.83	52025A		52025A
	4	D10	2130	6	7.157	52025A		52025A
	5	D10	2130	4	4.711	52025A		52025A
鋁	6	A4	1380	20	2.72	52025A		52025A
	7	D10	1660	16	17.82	52025A		52025A
	8	D10	360	8	1.13	52025A		52025A
	9	A4	150	12	0.158	52025A		52025A
	10	A4	260	6	0.154	52025A		52025A
	11	D10	1660	2	2.033	52025A		52025A
計							35.574	


平面图

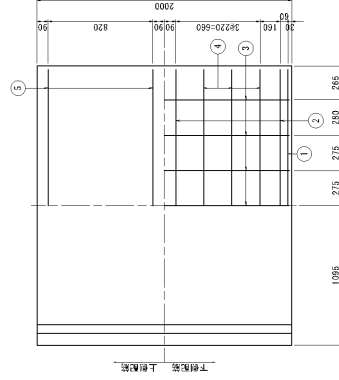


側面図




断面図

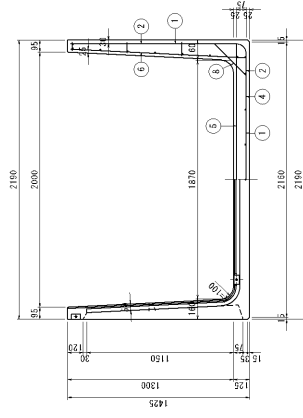


側面図



鉄筋加工図

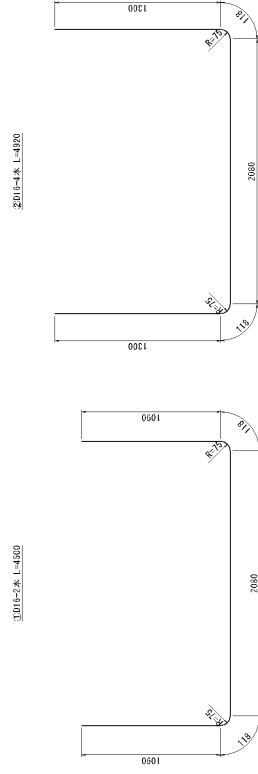


側面図



ワイドフレーム H1300xB2100

3-1 10


総加工図

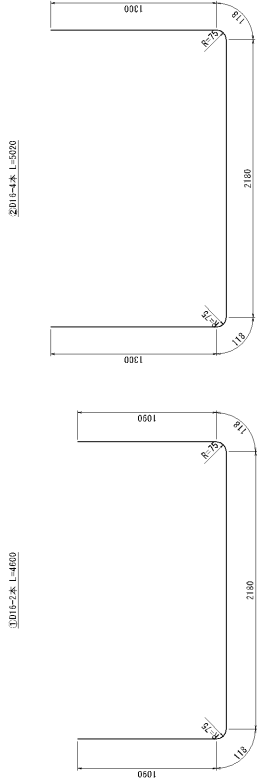


材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	4600	2	14.592	□	S275SA
2	φ16	5020	4	31.335	□	S275SA
3	φ10	1800	8	5.781	□	S275SA
4	φ10	2720	6	7.493	□	S275SA
5	φ10	2720	4	4.995	□	S275SA
6	φ4	1300	20	2.722	□	S275SA
7	φ10	1800	16	17.682	□	S275SA
8	φ10	360	8	1.613	□	S275SA
9	φ4	150	12	0.178	□	S275SA
10	φ4	260	6	0.154	□	S275SA
11	φ10	1800	2	2.103	□	S275SA
計				91.589		
総重量			2311 kg			


平面図

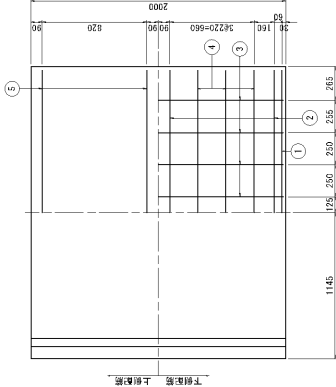


側面図



断面図

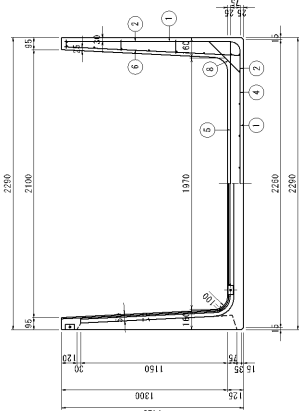

側面図




ワイドフレーム H1300xB2200

3-1 10

鉄筋加工図

①00c-2本 L=4700


200c-4本 L=5120

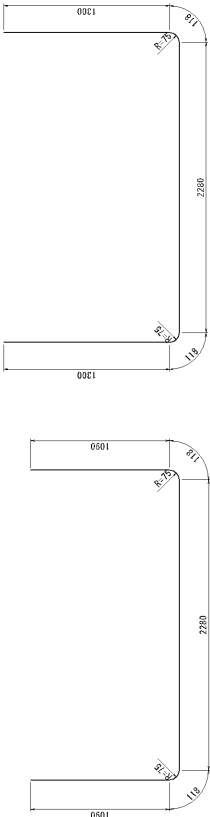

平面図

材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質	
1	B16	4700	2	14.664	□	□	S225A	
	2	B16	5120	4			31.648	S225A
	3	B10	1800	8			8.781	S225A
	4	B10	2300	6			7.639	S225A
2	5	B10	2300	4	5.219	—	S225A	
	6	φ4	1300	20	2.722		S225A	
	7	B10	1800	16	17.682		S225A	
	8	B10	360	8	1.613		S225A	
3	9	φ4	150	12	0.178	—	S225A	
	10	φ4	260	6	0.154		S225A	
	11	B10	1800	2	2.053		S225A	
	計				92.764			
総重量				2370	kg			

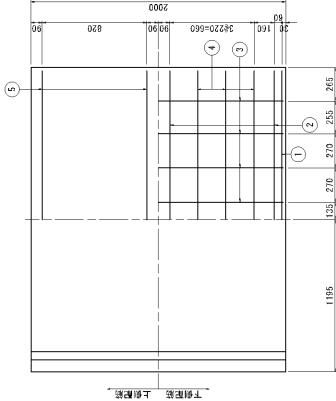

下側配筋 上側配筋

200c-2本 L=1900

1800

200c-4本 L=2300

2300

200c-2本 L=1300

1300

200c-16本 L=1800

1800


200c-4本 L=150

150


200c-2本 L=1800

1800


側面図



断面図

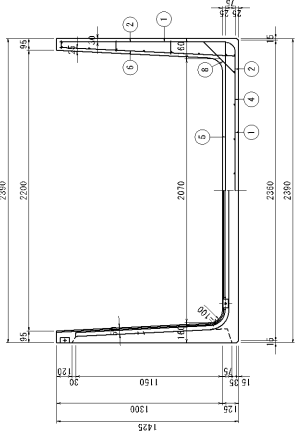

側面図




ワイドフレーム H1300xB2300

3-1 10

鉄筋加工図

①D10-2本 L=4800


2D10-4本 L=5220

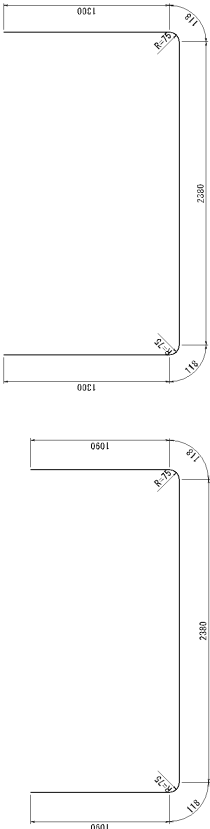


平面図

材料表 (一本当り)


番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D16	4800	2	14.976	□	S235SA
	2	D16	5220	4	32.573	□	S235SA
	3	D10	1800	8	8.781	—	S235SA
	4	D10	2400	6	8.165	—	S235SA
	5	D10	2400	4	5.443	—	S235SA
鋁	6	φ4	1300	20	2.722	—	S235SA
	7	D10	1800	16	17.582	—	S235SA
	8	D10	360	8	1.613	—	S235SA
	9	φ4	150	12	0.178	—	S235SA
	10	φ4	260	6	0.154	—	S235SA
計	11	D10	1800	2	2.053	—	S235SA
	計				94.260		
総重量				2439	kg		

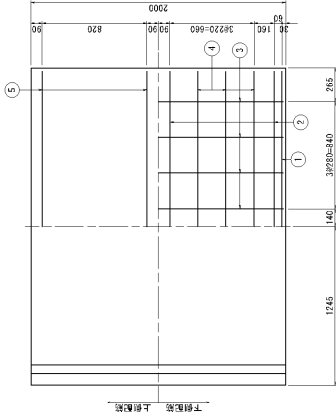


側面図



断面図

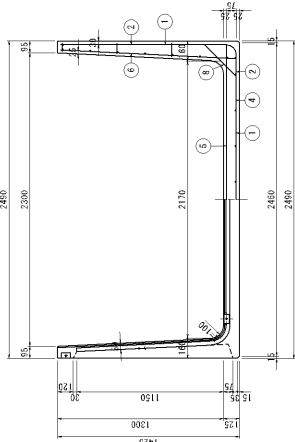

側面図




ワイドフレーム H1300xB2400

3-1 10

鉄筋加工図

200φ-4本 L=5320


200φ-2本 L=4900

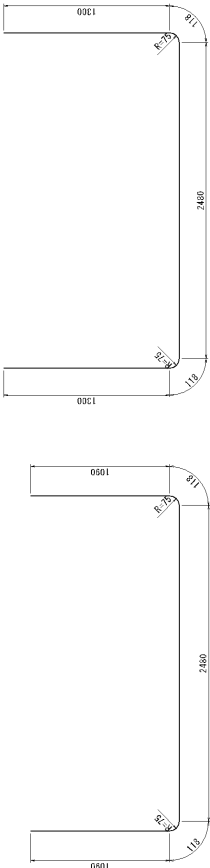


材料表 (一本当り)

棒筋 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	Ø16	4900	2	15.218	U	S225SA
2	Ø16	5320	4	33.197	U	S225SA
3	Ø10	1800	9	9.878	—	S225SA
4	Ø10	2500	6	8.501	—	S225SA
5	Ø10	2500	4	5.667	—	S225SA
6	Ø4	1300	20	2.722	—	S225SA
7	Ø10	1800	16	17.682	—	S225SA
8	Ø10	360	8	1.813	—	S225SA
9	Ø4	150	12	0.178	—	S225SA
10	Ø4	260	6	0.154	—	S225SA
11	Ø10	1800	2	2.053	—	S225SA
計				86.553		
総重量			2487 kg			


平面図

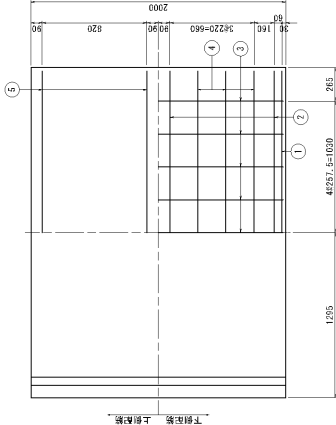


側面図



断面図

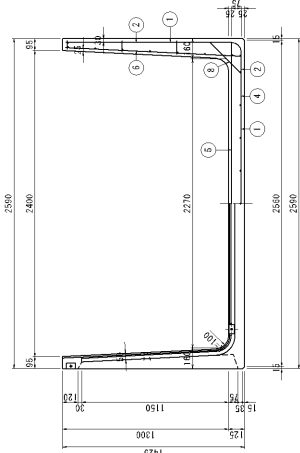

側面図




ワイドフレーム H1300xB2500

3-1 10


材料表 (一本当り)

規格 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	5000	2	15.600	□	S225SA
2	φ16	5400	4	33.821	□	S225SA
3	φ10	1800	9	9.818	—	S225SA
4	φ10	2600	6	8.837	—	S225SA
5	φ10	2600	4	5.891	—	S225SA
6	φ4	1300	20	2.722	—	S225SA
7	φ10	1800	16	17.682	—	S225SA
8	φ10	360	8	1.813	—	S225SA
9	φ4	150	12	0.178	—	S225SA
10	φ4	260	6	0.154	—	S225SA
11	φ10	1800	2	2.103	—	S225SA
計				88.248		
総重量			2546	kg		


平面図

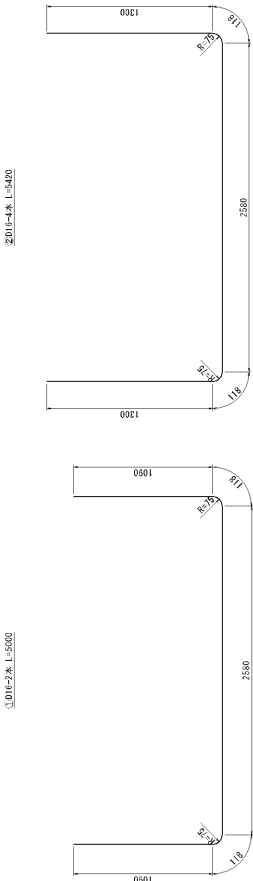


側面図



断面図

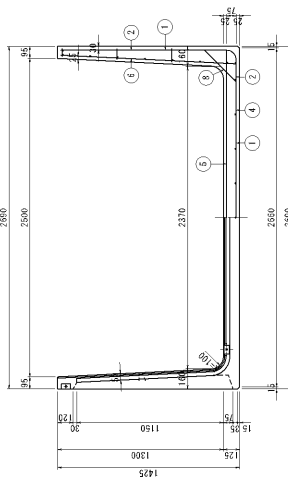

側面図



20φ10-2本 L=1960

1960

20φ10-4本 L=2600

2600

20φ10-2本 L=1960

1960

20φ10-4本 L=2600

2600

20φ10-2本 L=1960

1960

20φ10-4本 L=2600

2600

ワイドフレーム H1300xB2600


3-1 10

鉄筋加工図

200E-2本 L=5100

200E-2本 L=5100


200E-4本 L=5520

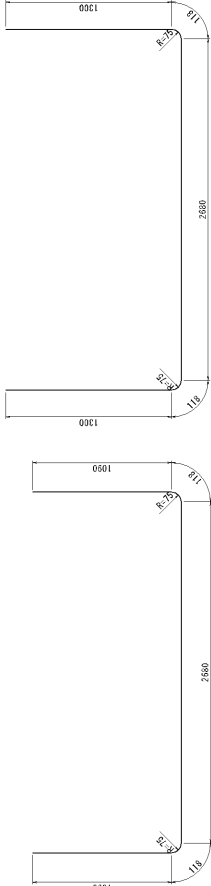

平面図

材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	Ø16	5100	2	15.812	□	S225A
2	Ø16	5520	4	34.445	□	S225A
3	Ø10	1800	9	9.878	—	S225A
4	Ø10	2730	6	9.173	—	S225A
5	Ø10	2730	4	6.115	—	S225A
6	Ø4	1300	20	2.722	—	S225A
7	Ø10	1800	16	17.882	—	S225A
8	Ø10	360	8	1.813	—	S225A
9	Ø4	150	12	0.178	—	S225A
10	Ø4	260	6	0.154	—	S225A
11	Ø10	1800	2	2.103	—	S225A
計				99.545		
総重量			2605 kg			

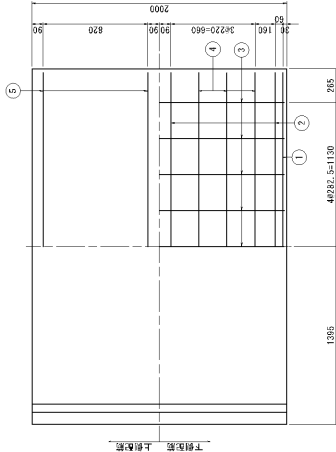

200E-2本 L=1860

1860

200E-4本 L=2720

2720

200E-2本 L=1860

1860

200E-16本 L=1860

1860

200E-2本 L=360

360

200E-4本 L=260




260

200E-2本 L=1860

1860

側面図

断面図

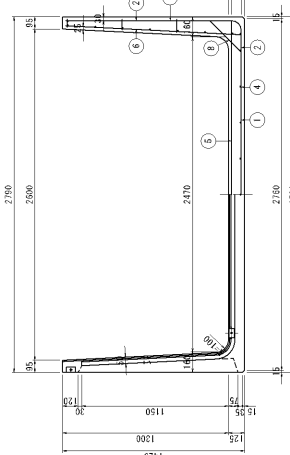


ワイドフレーム H1400xB900

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ15	3460	2	10.795	┐	S275SA
	2	φ15	3000	4	24.336	┐	S275SA
	3	φ10	1960	3	3.293	—	S275SA
	4	φ10	1070	6	3.477	—	S275SA
	5	—	—	—	—	—	—
鋁	6	φ4	1470	20	2.911	—	S275SA
	7	φ10	1960	18	17.982	—	S275SA
	8	φ10	390	8	1.613	—	S275SA
	9	φ4	130	12	0.178	—	S275SA
	10	φ4	240	6	0.134	—	S275SA
	11	φ10	1800	2	2.053	—	S275SA
					66.252		
製品重量				1832	kg		


平面図




縦断加工図

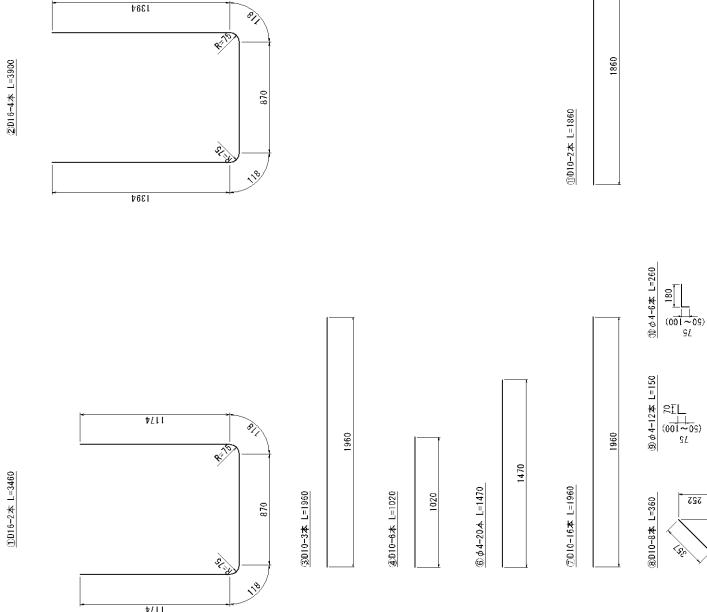

側面図



断面図




ワイドフレーム H1400xB1000

 $S=1:20$


材料表 (一本当り)

[illegible]


平面图




側面図










断面图



側面圖



钢筋加工图




ワイドフレーム H1400xB1100

3=1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ15	3660	2	11.419	┐┐	S275SA
	2	φ15	4100	4	25.384	┐┐	S275SA
	3	φ10	1960	4	4.390	—	S275SA
	4	φ10	1270	6	4.099	—	S275SA
	5	—	—	—	—	—	—
脚	6	φ4	1470	20	2.911	—	S275SA
	7	φ10	1960	18	17.952	—	S275SA
	8	φ10	390	8	1.613	—	S275SA
	9	φ4	130	12	0.178	—	S275SA
	10	φ4	240	6	0.134	—	S275SA
	11	φ10	1800	2	2.053	—	S275SA
計					69.292		
製品重量				1779	kg		


平面図




側面図




断面図



側面図



縁加工図

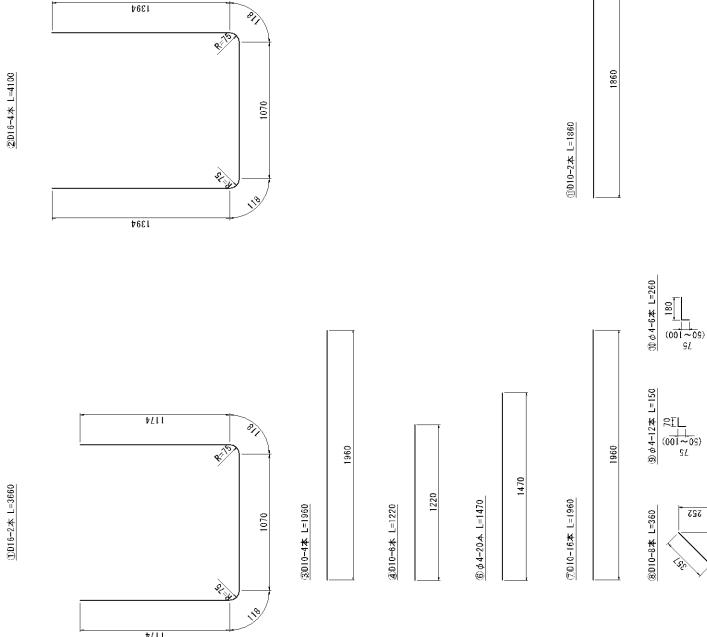


ワイドフレーム H1400xB1200

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
紙	1	φ15	3760	2	11.731	—	SUS304
	2	φ15	4200	4	26.208	—	SUS304
	3	φ10	1960	4	4.390	—	SUS304
	4	φ10	1370	6	4.435	—	SUS304
	5	—	—	—	—	—	—
筋	6	φ4	1470	20	2.911	—	SUS304
	7	φ10	1960	18	17.562	—	SUS304
	8	φ10	390	8	1.613	—	SUS304
	9	φ4	130	12	0.178	—	SUS304
	10	φ4	240	6	0.134	—	SUS304
	11	φ10	1800	2	2.053	—	SUS304
	—	—	—	—	—	—	—
計				—	71.265	—	—
製品重量				1433	kg	—	—


平面図




縦筋加工図

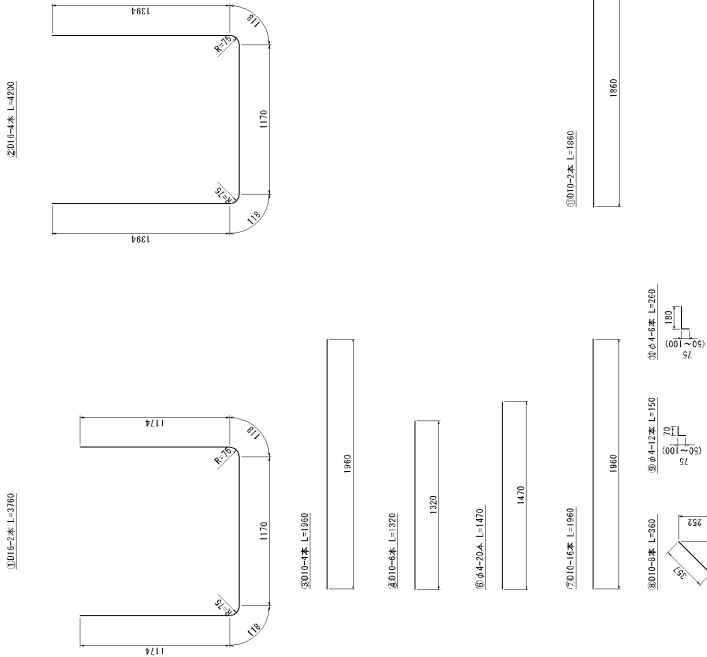

断面図



側面図




ワイドブリューム H1400xB1300

 $S=1:20$


材料表 (一本当り)

標本 No.	種	長	寬	厚	重量	制式	材質
底	1	10.6	3.66	2	12.63	—	S202SA
	2	10.5	4.00	4	26.32	—	S202SA
	3	10.0	1.60	5	5.48	—	S202SA
	4	10.0	1.40	6	4.71	—	S202SA
	5	—	—	—	—	—	—
箱	6	6.4	1.70	2	2.31	—	S202SA
	7	10.0	1.60	18	17.42	—	S202SA
	8	10.0	3.60	8	1.43	—	S202SA
	9	6.4	1.50	12	0.178	—	S202SA
	10	6.4	2.60	6	0.154	—	S202SA
11	10.0	1.60	2	2.433	—	—	S202SA
計					73.452		


區區斗




側面図




断面図



側面図



鉄筋加工図

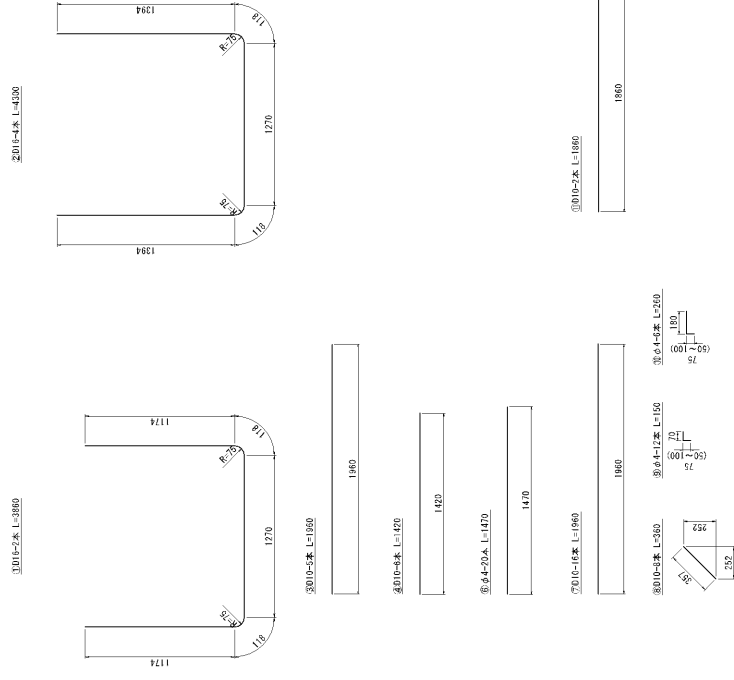


ワイドブリューム H1400xB1400

 $S=1:20$


材料表 (一本当り)

材料 No.	型	高	底	支	数量	材	材質
1	D16	3960	2	12,355	—	—	S3025FA
2	D15	4400	4	27,458	—	—	S3025FA
3	D10	1960	5	5,488	—	—	S3025FA
4	D10	1920	6	5,197	—	—	S3025FA
5	—	—	—	—	—	—	S3025FA
6	4	1470	20	2,311	—	—	S3025FA
7	D10	1960	18	17,582	—	—	S3025FA
8	D10	3600	8	1,812	—	—	S3025FA
9	4	150	12	0,178	—	—	S3025FA
10	4	260	6	0,154	—	—	S3025FA
11	D10	1660	2	7,053	—	—	S3025FA
計							
				1355	34	74,307	


區區斗




側面図




断面図

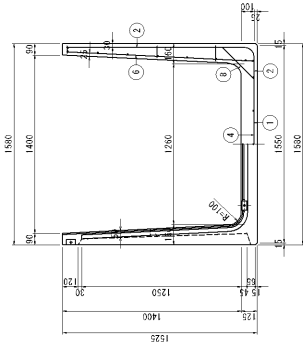


側面図




鉄筋加工図

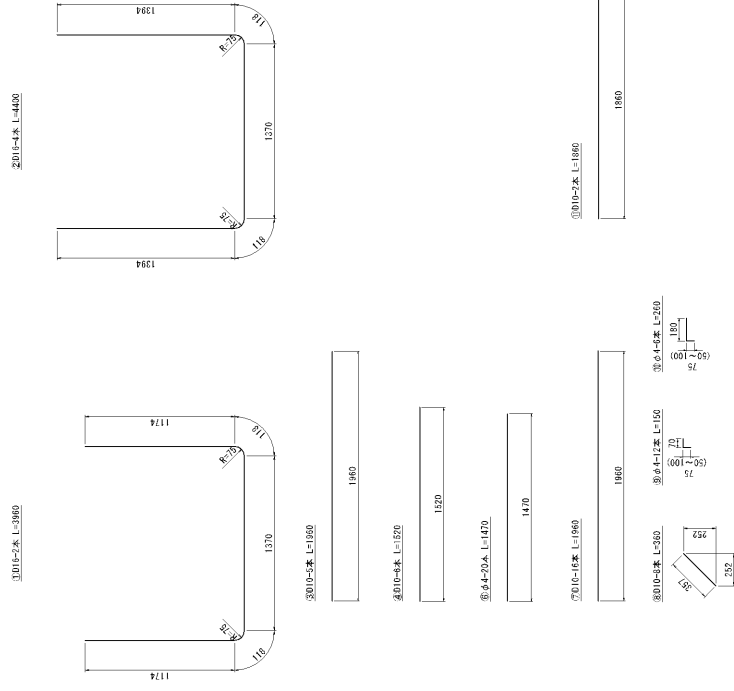


區區斗




側面図



断面図

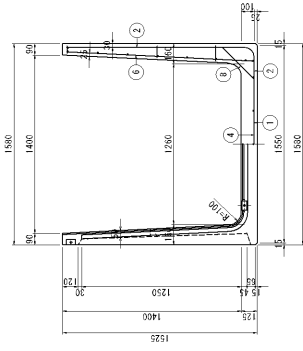

側面図




ワイドフレーム H1400xB1500

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ15	4600	2	12.607	┐┐	S205SA
	2	φ15	4500	4	28.080	┐┐	S205SA
	3	φ10	1960	5	5.488	—	S205SA
	4	φ10	1270	6	5.443	—	S205SA
	5	—	—	—	—	—	—
筋	6	φ4	1470	20	2.911	—	S205SA
	7	φ10	1960	18	17.952	—	S205SA
	8	φ10	390	8	1.613	—	S205SA
	9	φ4	130	12	0.178	—	S205SA
	10	φ4	240	6	0.134	—	S205SA
	11	φ10	1800	2	2.053	—	S205SA
					76.179		
製品重量				2014 kg			



平面図




縦筋加工図

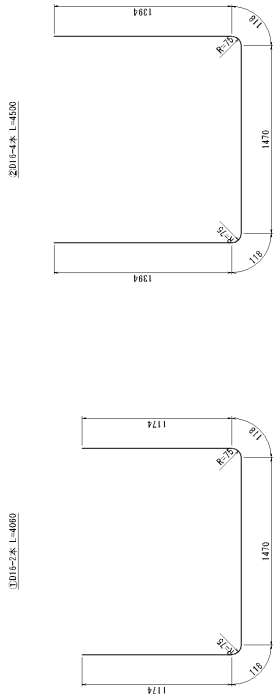


⑩φ10-2本 L=1800




側面図



断面図

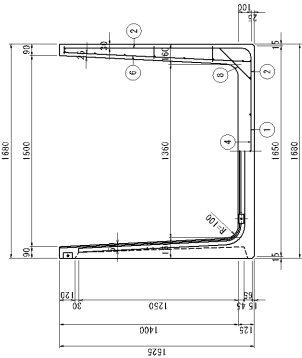

側面図




ワイドフレーム H1400xB1600

3-1 10

材料表 (一本当り)


種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ16	4160	2	12.979	┐┐	S275SA
	2	φ16	4600	4	28.704	┐┐	S275SA
	3	φ10	1660	6	6.586	┐┐	S275SA
	4	φ10	1720	6	5.779	┐┐	S275SA
	5	-	-	-	-	-	-
脚	6	φ4	1470	20	2.911	┐┐	S275SA
	7	φ10	1960	18	17.562	┐┐	S275SA
	8	φ10	390	8	1.613	┐┐	S275SA
	9	φ4	130	12	0.178	┐┐	S275SA
	10	φ4	240	6	0.134	┐┐	S275SA
	11	φ10	1860	2	2.053	┐┐	S275SA
					78.549		
製品重量				2073	kg		

平面図




縦加工図


3000-2本 L=4160




3000-4本 L=1960




3000-4本 L=1720



3000-2本 L=1470



3000-16本 L=1960



3000-2本 L=200




3000-12本 L=150




3000-4本 L=200



側面図



側面図




ワイドフレーム H1400xB1700

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ15	4260	2	13.291	—	SUS304
	2	φ15	4700	4	29.328	—	SUS304
	3	φ10	1660	6	6.386	—	SUS304
	4	φ10	1820	6	6.115	—	SUS304
	5	—	—	—	—	—	—
脚	6	φ4	1470	20	2.911	—	SUS304
	7	φ10	1660	18	17.562	—	SUS304
	8	φ10	390	8	1.613	—	SUS304
	9	φ4	130	12	0.178	—	SUS304
	10	φ4	240	6	0.134	—	SUS304
	11	φ10	1860	2	2.053	—	SUS304
					79.421		
製品重量				2132	kg		


平面図




縁加工図

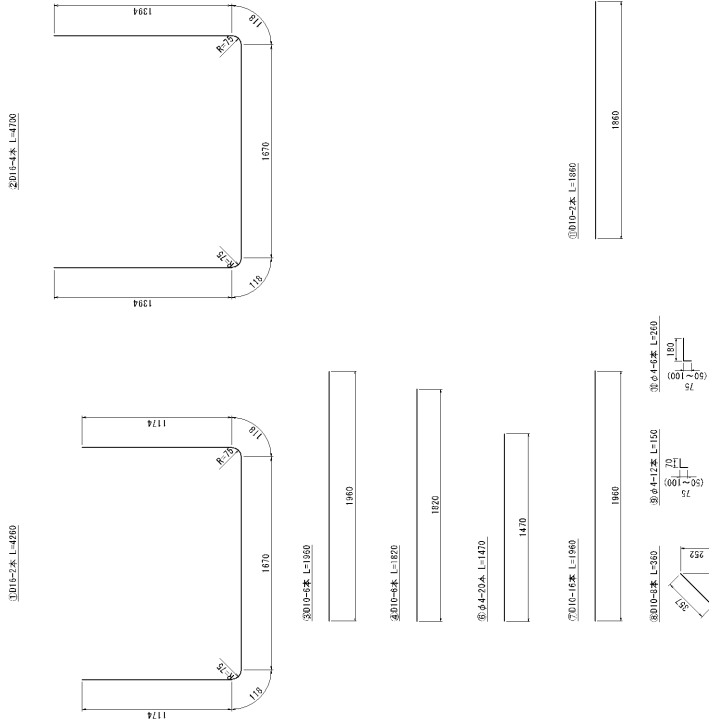

側面図



断面図

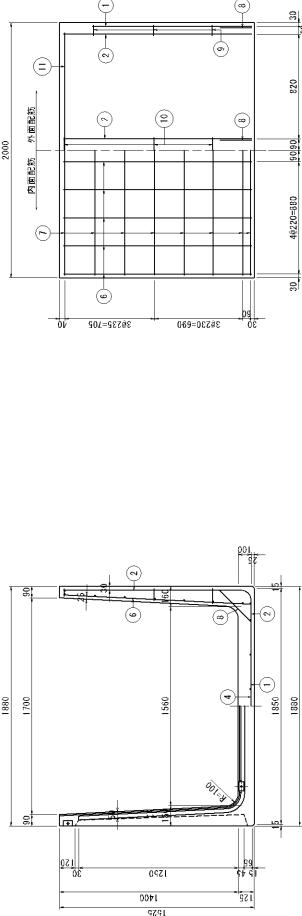


ワイドフレーム H1400xB1900

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ16	4400	2	13.915	—	SUS304
	2	φ16	4000	4	30.576	—	SUS304
	3	φ16	1660	7	7.683	—	SUS304
	4	φ16	2070	6	6.787	—	SUS304
	5	φ16	2070	4	4.525	—	SUS304
	6	φ4	1470	20	2.911	—	SUS304
筋	7	φ16	1660	18	17.562	—	SUS304
	8	φ16	360	8	1.613	—	SUS304
	9	φ4	136	12	0.178	—	SUS304
	10	φ4	240	6	0.134	—	SUS304
	11	φ16	1860	2	2.053	—	SUS304
	筋				87.937		
製品重量				2249	kg		


平面図

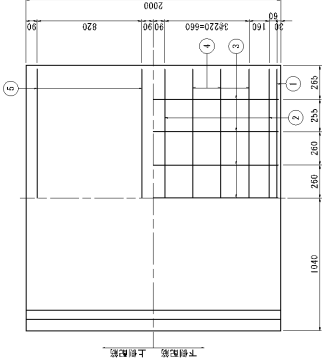


縁加工図

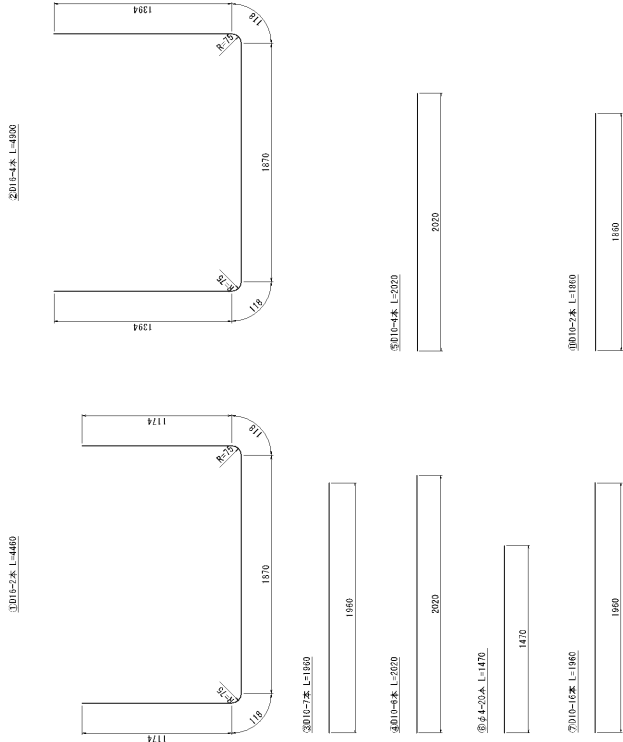


側面図



断面図

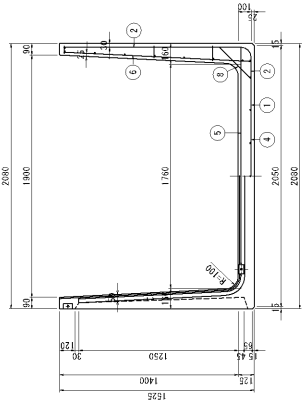

側面図




ワイドフレーム H1400xB2000

3-1 10

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ16	4650	2	14.227	—	S205SA
	2	φ16	5000	4	31.290	—	S205SA
	3	φ16	1960	7	7.683	—	S205SA
	4	φ16	2170	6	7.123	—	S205SA
	5	φ4	1470	4	4.749	—	S205SA
	6	φ4	1470	20	2.911	—	S205SA
筋	7	φ16	1960	18	17.562	—	S205SA
	8	φ16	390	8	1.613	—	S205SA
	9	φ4	130	12	0.178	—	S205SA
	10	φ4	240	6	0.134	—	S205SA
	11	φ16	1800	2	2.053	—	S205SA
					80.432		
製品重量				2393	kg		



平面図

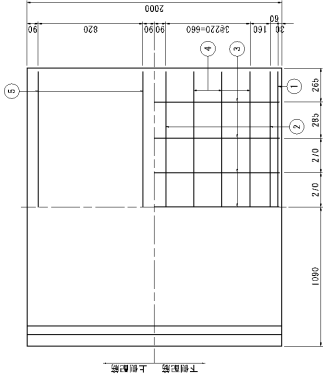


縦筋加工図

③φ16-2本 L=4650


②φ16-4本 L=5000




⑤φ16-7本 L=1960




④φ16-4本 L=2170



⑥φ4-20本 L=1470



⑧φ16-2本 L=1800



②φ16-2本 L=510




⑤φ16-2本 L=150




③φ16-4本 L=500




側面図



断面図

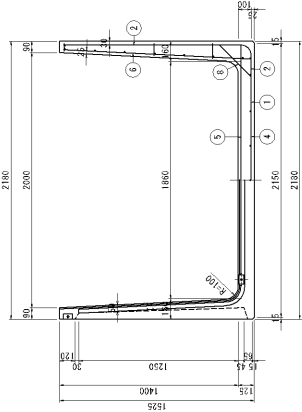

側面図





ワイドフレーム H1400xB2300

3-1 120


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	D15	4650	2	15.163	—	S202SA
	2	D15	5300	4	33.072	—	S202SA
	3	D15	1960	8	8.781	—	S202SA
	4	D10	2470	6	8.131	—	S202SA
	5	D10	2470	4	5.471	—	S202SA
	6	φ4	1470	20	2.911	—	S202SA
筋	7	D10	1960	18	17.952	—	S202SA
	8	D10	390	8	1.613	—	S202SA
	9	φ4	130	12	0.178	—	S202SA
	10	φ4	240	6	0.134	—	S202SA
	11	D10	1850	2	2.053	—	S202SA
					95.609		
製品重量				2484	kg		


平面図

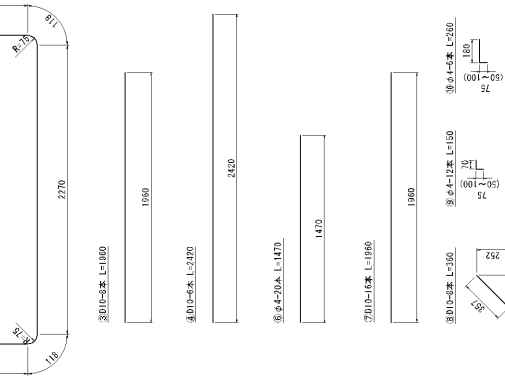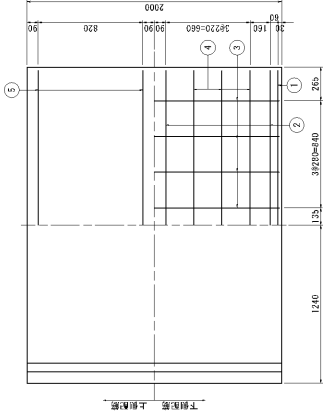


鉄筋加工図

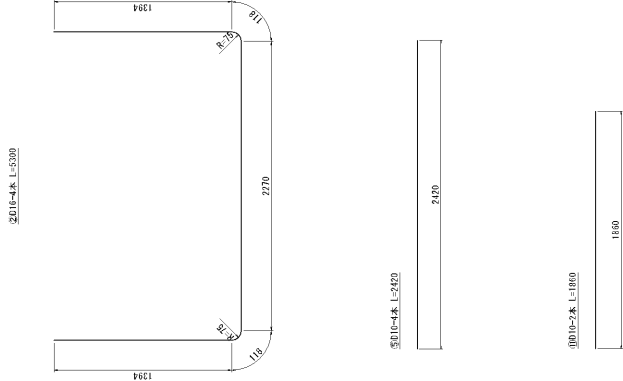


側面図



断面図

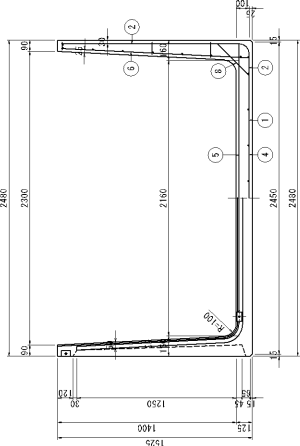

側面図




ワイドフレーム H1400xB2400

3-1 120

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ15	4960	2	15.475	—	S355SA
	2	φ15	5400	4	33.696	—	S355SA
	3	φ15	1960	8	8.781	—	S355SA
	4	φ10	2500	6	8.467	—	S355SA
	5	φ10	2500	4	5.645	—	S355SA
	6	φ4	1470	20	2.911	—	S355SA
筋	7	φ10	1960	18	17.952	—	S355SA
	8	φ10	390	8	1.613	—	S355SA
	9	φ4	130	12	0.178	—	S355SA
	10	φ4	240	6	0.134	—	S355SA
	11	φ10	1800	2	2.053	—	S355SA
					96.555		
製品重量				2343	kg		


平面図

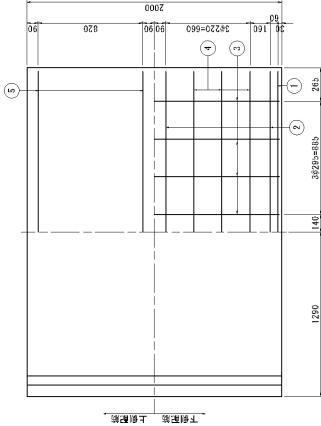


①φ10-2本 L=4960

鉄筋加工図


②φ15-4本 L=5400

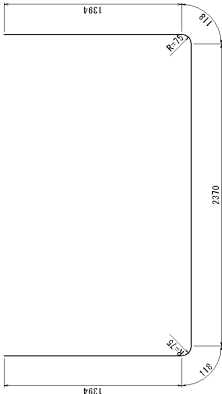


③φ10-3本 L=1960




④φ10-4本 L=2500



⑤φ4-20本 L=1470



⑥φ10-2本 L=1800




⑦φ4-12本 L=130




⑧φ10-5本 L=250




断面図

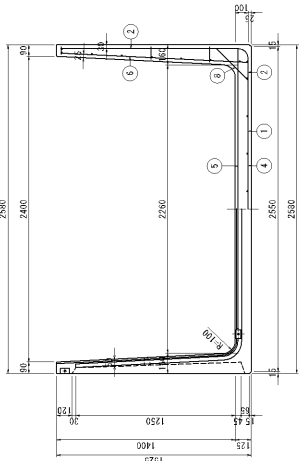

側面図



側面図





ワイドフレーム H1400xB2500

3-1 10

鉄筋加工図

③D10-2本 L=5000


③D10-2本 L=5000

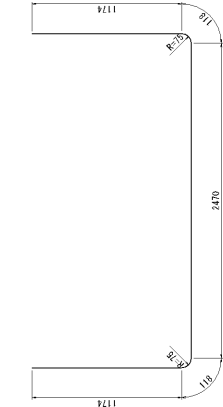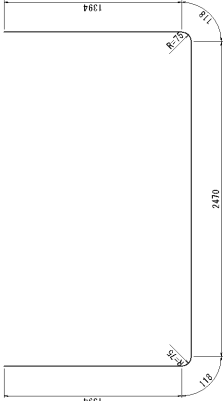

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D15	5000	2	15.797	—	S32B5A
	2	D15	5000	4	34.320	—	S32B5A
	3	D10	1960	9	9.478	—	S32B5A
	4	D10	2670	6	8.803	—	S32B5A
	5	D10	2670	4	5.869	—	S32B5A
	6	φ4	1470	20	2.911	—	S32B5A
筋	7	D10	1960	18	17.562	—	S32B5A
	8	D10	390	8	1.413	—	S32B5A
	9	φ4	130	12	0.178	—	S32B5A
	10	φ4	240	6	0.134	—	S32B5A
	11	D10	1800	2	2.053	—	S32B5A
	12	—	—	—	—	—	—
計	—	—	—	—	99.152	—	—
	—	—	—	—	—	—	—
製品重量				2492	kg		

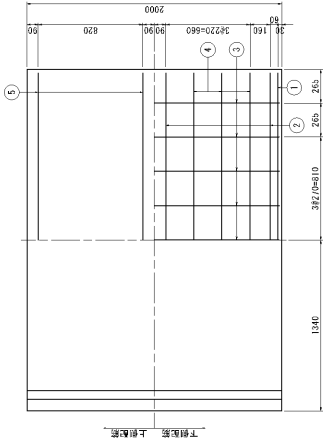

③D10-2本 L=1860

1960

③D10-4本 L=2070

2070

③D10-2本 L=1470

1470

③D10-2本 L=1800

1800

③D10-4本 L=500

500


③D10-1本 L=150

150


③D10-5本 L=250

250


側面図



断面図

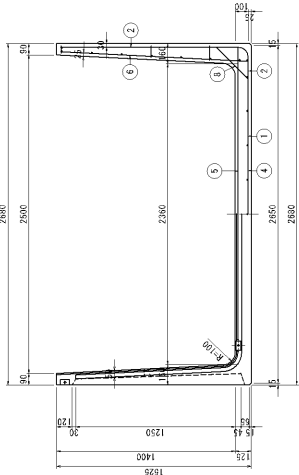

側面図




ワイドフレーム H1400xB2600

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	5160	2	16.099	┐	S275SA
	2	φ16	5600	4	34.944	┐	S275SA
	3	φ16	1960	9	9.878	┐	S275SA
	4	φ16	2770	6	9.139	┐	S275SA
	5	φ16	2770	4	6.093	┐	S275SA
	6	φ4	1470	20	2.911	┐	S275SA
筋	7	φ16	1960	18	17.952	┐	S275SA
	8	φ16	3960	8	1.613	┐	S275SA
	9	φ4	1360	12	0.178	┐	S275SA
	10	φ4	2460	6	0.134	┐	S275SA
	11	φ16	1860	2	2.053	┐	S275SA
計					105.654		
製品重量				24800	kg		


平面図

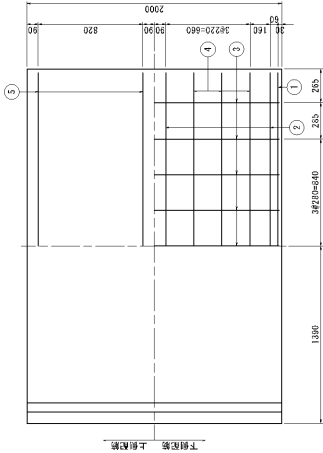


鉄筋加工図

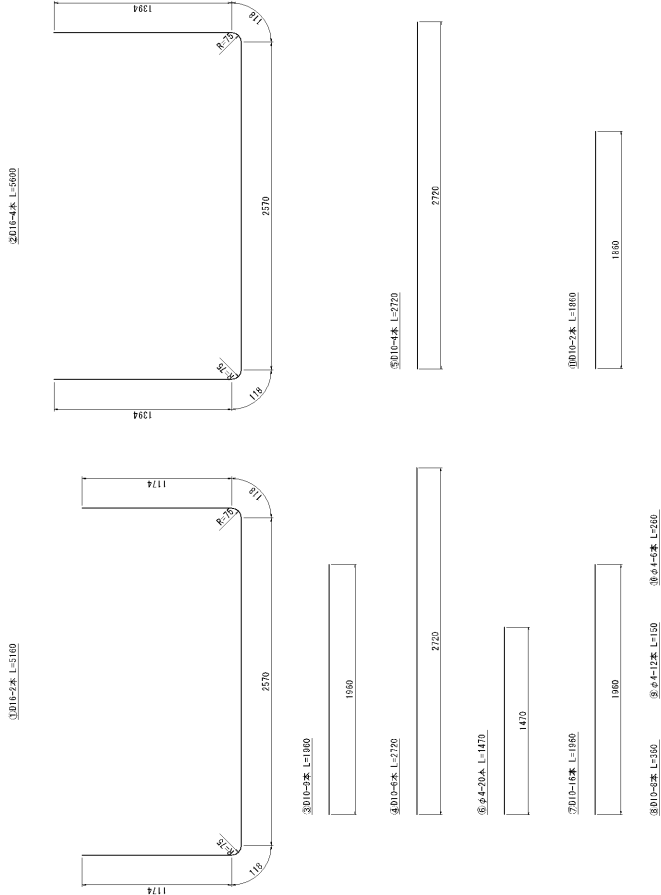

断面図

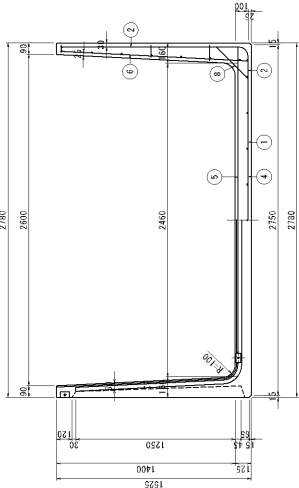

側面図




ワイドフレーム H1400xB2700

3=1 10

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	6760	2	16.411	—	S275SA
	2	φ16	6700	4	35.568	—	S275SA
	3	φ16	1960	9	9.878	—	S275SA
	4	φ16	2870	6	9.475	—	S275SA
	5	φ16	2870	4	6.317	—	S275SA
	6	φ4	1470	20	2.911	—	S275SA
筋	7	φ10	1960	18	17.952	—	S275SA
	8	φ10	390	8	1.613	—	S275SA
	9	φ4	130	12	0.178	—	S275SA
	10	φ4	240	6	0.134	—	S275SA
	11	φ10	1860	2	2.053	—	S275SA
					102.150		
製品重量				2719 kg			

平面図

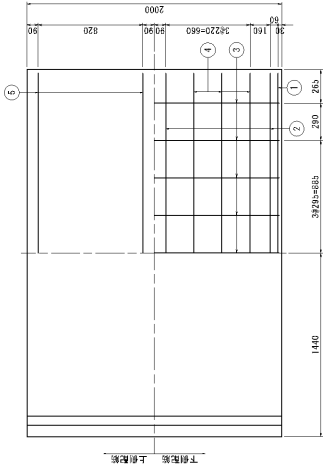


下側配筋 上側配筋


鉄筋加工図

③φ16-2本 L=2870


③φ16-2本 L=2870

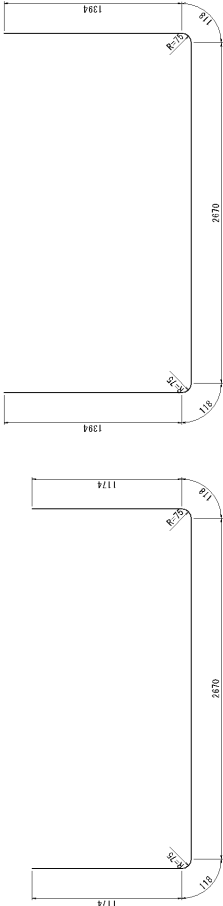


③φ16-2本 L=1960




⑤φ16-4本 L=2870



⑥φ4-20本 L=1470



⑧φ10-2本 L=1860



⑩φ4-4本 L=390




⑨φ4-12本 L=130




⑪φ10-2本 L=2520



側面図



側面図




ワイドフレーム H1400xB2800

3=1 20

鉄筋加工図

①010-2本 L=2400


2010-4本 L=1800

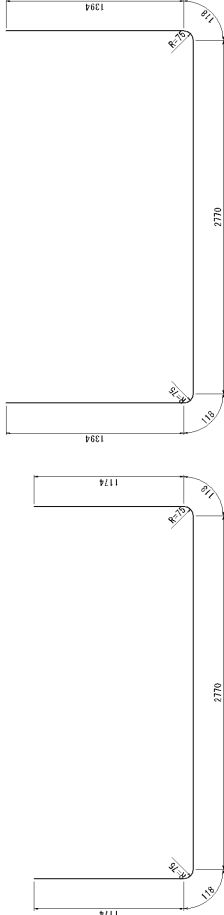

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D16	6560	2	16.723	—	S302SA
	2	D16	6800	4	36.192	—	S302SA
	3	D10	1660	10	10.976	—	S302SA
	4	D10	2970	6	9.811	—	S302SA
	5	D10	2970	4	6.541	—	S302SA
	6	φ4	1470	20	2.911	—	S302SA
筋	7	D10	1660	18	17.462	—	S302SA
	8	D10	390	8	1.613	—	S302SA
	9	φ4	130	12	0.178	—	S302SA
	10	φ4	240	6	0.134	—	S302SA
	11	D10	1800	2	2.053	—	S302SA
					104.744		
製品重量				2.713	kg		

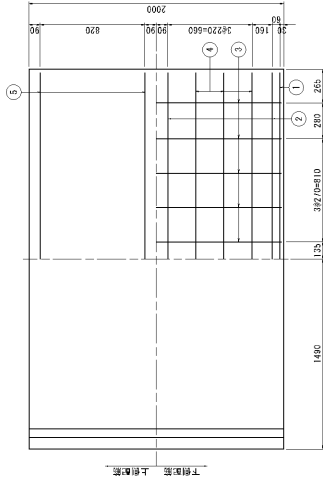

③010-10本 L=1800

1950

④010-4本 L=2970

2970

⑤φ4-20本 L=1470

1470

②010-14本 L=1860

1860

⑥010-6本 L=2520

2520


⑦010-14本 L=1100

1100


⑧010-2本 L=1800

1800

側面図



側面図




ワイドフレーム H1500xB1000


3-1 10

鉄筋加工図

①D15-2本 L=2160




②D15-4本 L=1240





平面図

材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	3760	2	11.731	┐	S275SA
	2	D15	4240	4	26.458	┐	S275SA
	3	D10	1960	4	4.390	┐	S275SA
	4	D10	1140	6	3.830	┐	S275SA
	5	-	-	-	-	-	-
筋	6	φ4	1600	20	3.168	┐	S275SA
	7	D10	1960	18	17.952	┐	S275SA
	8	D10	440	8	1.971	┐	S275SA
	9	φ4	150	12	0.178	┐	S275SA
	10	φ4	240	6	0.154	┐	S275SA
	11	D10	1800	2	2.053	┐	S275SA
計					71.325		
製品重量				2012	kg		



③D10-2本 L=1800



⑤D10-4本 L=1150




⑦D10-4本 L=1150




⑨D10-4本 L=1150



側面図



側面図





ワイドフレーム H1500xB1100

3=1 10

鉄板加工図

①D15-2本 L=980

③D15-2本 L=1340




平面図


材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 kg	形状	材質
鉄	1	D15	980	2	12.643	—	S275SA
	2	D15	4340	4	27.032	—	S275SA
	3	D10	1960	4	4.390	—	S275SA
	4	D10	1240	6	4.166	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.952	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
計					72.797		
製品重量				2077 kg			


③D10-1本 L=1960




④D10-4本 L=1240




⑤φ4-20本 L=100




⑦D10-16本 L=1960




⑧φ4-12本 L=150




側面図



断面図



側面図





ワイドフレーム H1500xB1200

3-1 10

鉄筋加工図

①D15-2本 L=9860


2D16-4本 L=4440



平面図



材料表 (一本当り)

種類	No	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D15	9860	2	12.355	—	S275SA
	2	D15	4440	4	27.706	—	S275SA
	3	D10	1960	4	4.390	—	S275SA
	4	D10	1340	6	4.502	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.471	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
	12	—	—	—	—	—	—
計					74.659		
製品重量				2143	kg		




下側配筋 上側配筋


3D10-1本 L=1960



6φ4-20本 L=1000



2D16-4本 L=1960




3D10-2本 L=1140




3D10-2本 L=500



側面図



側面図





ワイドフレーム H1500xB1300

3-1 10

鉄筋加工図

①D15-2本 L=4060

2D16-4本 L=1540



平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D15	4060	2	15.2	U	S275SA
	2	D16	4540	4	28.330	U	S275SA
	3	D10	1960	5	5.488	—	S275SA
	4	D10	1440	6	4.838	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
計					76.429		
製品重量				2300	kg		

③D10-2本 L=1960

1960

④D10-4本 L=1440


1440

⑤φ4-20本 L=1000

1000

⑦D10-16本 L=1960

1960




⑧φ4-12本 L=1500




③D10-2本 L=1800

1800


側面図



断面図



側面図





ワイドフレーム H1500xB1400

3-1 10

鉄筋加工図

①D15-2本 L=1160


2D16-4本 L=1640



平面図

材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	4160	2	12.979	┐┐	S275SA
	2	D15	4640	4	28.954	┐┐	S275SA
	3	D10	1960	5	5.488	┐┐	S275SA
	4	D10	1540	6	5.174	┐┐	S275SA
	5	-	-	-	-	┐┐	-
筋	6	φ4	1600	20	3.168	┐┐	S275SA
	7	D10	1960	18	17.952	┐┐	S275SA
	8	D10	440	8	1.971	┐┐	S275SA
	9	φ4	150	12	0.178	┐┐	S275SA
	10	φ4	260	6	0.154	┐┐	S275SA
	11	D10	1600	2	2.053	┐┐	S275SA
						┐┐	
計					77.711		
製品重量				2275	kg		




③D10-2本 L=1660


2D16-4本 L=1640

1D15-2本 L=1160


2D16-4本 L=1640




側面図



断面図

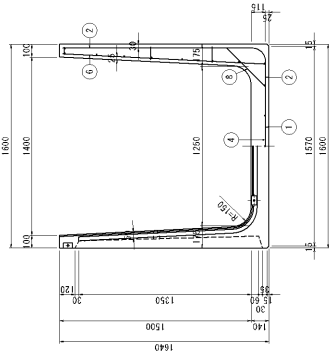

側面図





ワイドフレーム H1500xB1500

3-1 10

鉄板加工図

①D15-2本 L=4260

2D16-4本 L=1740




平面図


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 kg	形状	材質
鉄	1	D15	4260	2	13.291	—	S275SA
	2	D15	4740	4	29.578	—	S275SA
	3	D10	1960	5	5.488	—	S275SA
	4	D10	1640	6	5.510	—	S275SA
	5	—	—	—	—	—	—
筋	6	Φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.952	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	Φ4	150	12	0.178	—	S275SA
	10	Φ4	260	6	0.154	—	S275SA
	11	D10	1600	2	2.053	—	S275SA
計					78.932		
製品重量				2344	kg		


③D10-2本 L=1960



④D10-4本 L=1640




⑤Φ4-20本 L=100




⑦D10-16本 L=1640




⑧Φ4-12本 L=150



側面図



側面図





ワイドフレーム H1500xB1600

3-1 10

鉄板加工図

①D15-2本 L=1500

2D15-4本 L=1500




平面図


材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 kg	形状	材質
鉄	1	D15	4300	2	12.003	—	S275SA
	2	D15	4840	4	30.202	—	S275SA
	3	D10	1960	6	6.586	—	S275SA
	4	D10	1740	6	5.846	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
					81.253		
製品重量				2400	kg		


③D10-2本 L=1500



④D10-4本 L=1740



⑤φ4-20本 L=1000



⑥D10-16本 L=1600



⑦D10-4本 L=150




⑧φ4-12本 L=150




⑨D10-2本 L=1800




側面図



断面図

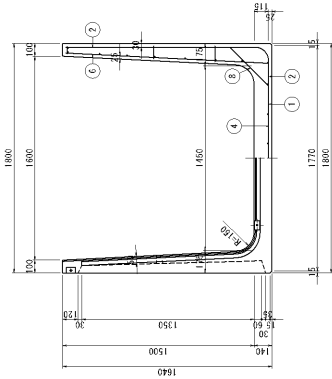

側面図




ワイドフレーム H1500xB1700

3-1 10

鉄板加工図

①D15-2本 L=4460

2D16-4本 L=1840

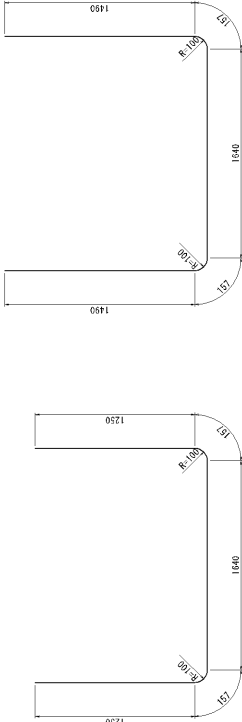


平面図


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	4460	2	12.915	—	S275SA
	2	D15	6940	4	30.826	—	S275SA
	3	D10	1960	6	6.586	—	S275SA
	4	D10	1840	6	6.182	—	S275SA
	5	—	—	—	—	—	—
鋁	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1860	2	2.053	—	S275SA
	12	—	—	—	—	—	—
計					82.625		
製品重量				2472	kg		


③D10-2本 L=1960




2D10-4本 L=1840



⑥φ4-20本 L=1000



⑦D10-16本 L=1640




⑧φ4-12本 L=150




⑨D10-2本 L=1860



側面図



側面図





ワイドフレーム H1500xB1800

3=120

鉄板加工図

①D15-2本 L=4560


2D16-4本 L=6540



平面図

材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 kg	形状	材質
鉄	1	D15	4560	2	14.227	—	S275SA
	2	D15	6040	4	31.450	—	S275SA
	3	D10	1940	6	6.586	—	S275SA
	4	D10	1940	6	6.518	—	S275SA
	5	D10	1940	4	4.346	—	S275SA
	6	φ4	1600	20	3.168	—	S275SA
筋	7	D10	1960	18	17.952	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
					88.242		
製品重量				2533	kg		

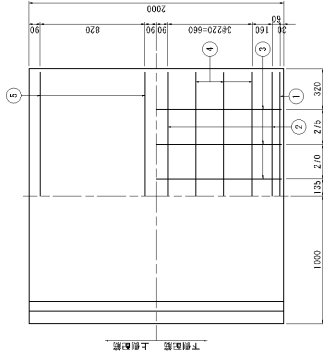

下側基準 上側基準

③D10-2本 L=1960


④D10-4本 L=1840

⑤D10-4本 L=1840


⑥φ4-20本 L=1000

⑦D10-4本 L=1960


⑧φ4-12本 L=150



側面図



側面図




ワイドフレーム H1500xB1900

3=1/20

鉄板加工図

①D15-2本 L=4660


2D16-4本 L=5140

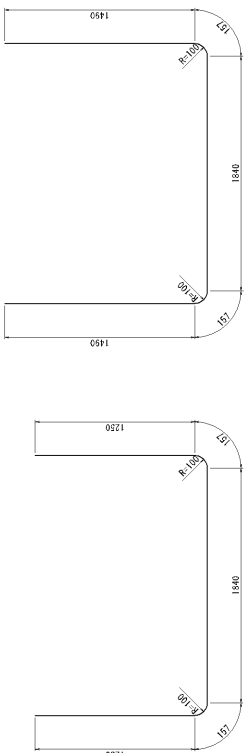

平面図

材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	4660	2	14.539	U	SUS304
	2	D15	5140	4	32.074		SUS304
	3	D10	1960	7	7.683		SUS304
	4	D10	2040	6	6.834		SUS304
	5	D10	2040	4	4.370		SUS304
筋	6	φ4	1600	20	3.168	—	SUS304
	7	D10	1960	18	17.952		SUS304
	8	D10	440	8	1.971		SUS304
	9	φ4	190	12	0.178		SUS304
	10	φ4	240	6	0.154		SUS304
	11	D10	1860	2	2.053		SUS304
				計	90.826		
製品重量				2494	kg		

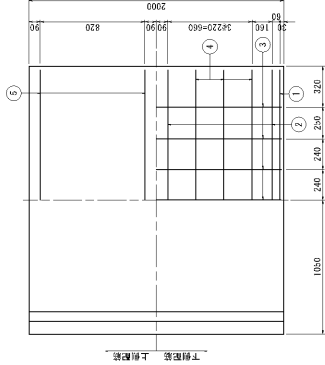

③D10-2本 L=1900

④D10-4本 L=2040

⑤D10-4本 L=2040

⑥φ4-20本 L=1000


⑦D10-16本 L=1960

⑧φ4-12本 L=150


⑨φ4-4本 L=240



側面図



側面図




ワイドフレーム H1500xB2000

3=1 20

鉄板加工図

①③⑤=2本 L=4760


20⑥=4本 L=5240

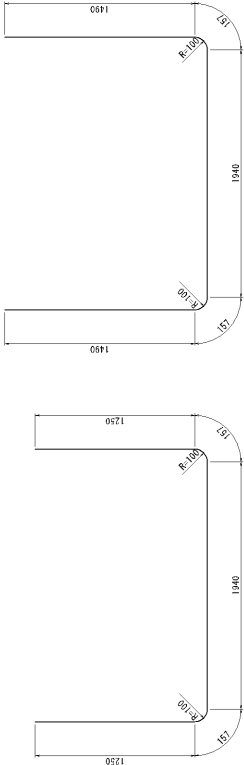

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	4760	2	14.051	—	SUS304
	2	φ16	5240	4	32.698	—	SUS304
	3	φ10	1660	7	7.683	—	SUS304
	4	φ10	2140	6	7.190	—	SUS304
	5	φ10	2140	4	4.794	—	SUS304
	6	φ4	1600	20	3.168	—	SUS304
鋁	7	φ10	1660	18	17.952	—	SUS304
	8	φ10	440	8	1.971	—	SUS304
	9	φ4	150	12	0.178	—	SUS304
	10	φ4	260	6	0.154	—	SUS304
	11	φ10	1660	2	2.053	—	SUS304
計					92.232		
製品重量				2470	kg		

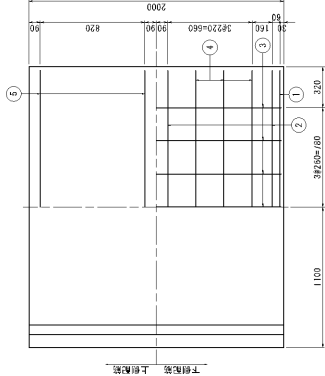

下側鉄板 上側鉄板

20⑥=2本 L=1960


20⑥=4本 L=2140

20⑥=4本 L=2140


20⑥=4本 L=1000

20⑥=4本 L=1960


20⑥=2本 L=1860



側面図




側面図



ワイドフレーム H1500xB2100

$$S=1:20$$


鉄筋加工図

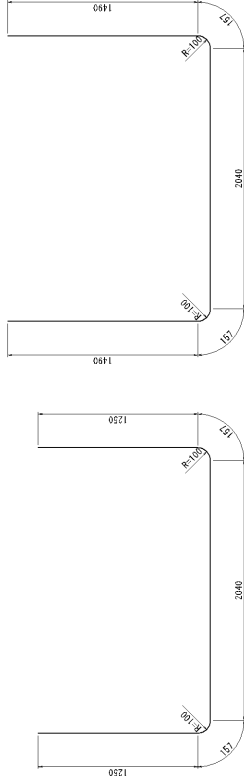


平面图

材料表 (一本当り)



類別	N ^o	型	價	之	數量	制	承	價
紙	1	D15	4690	2	15,163			50255A
	2	D15	5340	4	23,322			50255A
	3	D10	1965	7	7,833			50255A
	4	D10	2240	6	7,296			50255A
	5	D10	2240	4	5,018			50255A
箱	6	6-1	1600	20	3,188			50255A
	7	D10	1960	18	17,342			50255A
	8	D10	440	8	1,971			50255A
	9	6-1	150	12	0,719			50255A
	10	6-1	260	6	0,154			50255A
計	11	D10	1660	2	2,833			50255A
	計				39,520			

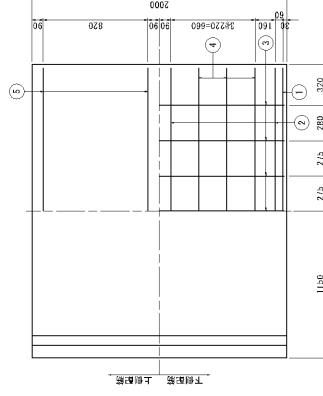

圖例圖



断面図

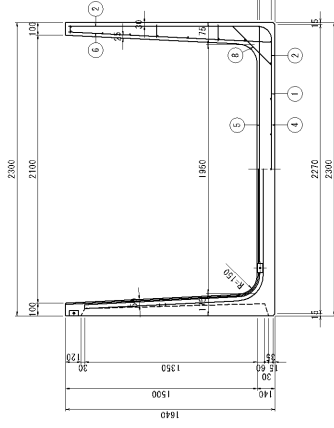


ワイドフレーム H1500xB2300

3=1 10

鉄板加工図

①D15-2本 L=4060


2D16-4本 L=5540

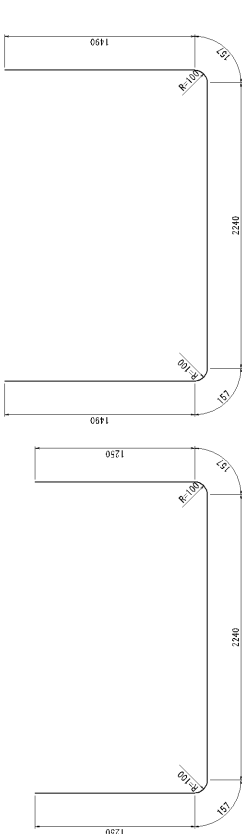

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	6060	2	15.797	—	S3025SA
	2	D15	6540	4	34.570	—	S3025SA
	3	D10	1960	8	8.781	—	S3025SA
	4	D10	2440	6	8.198	—	S3025SA
	5	D10	2440	4	5.405	—	S3025SA
	6	φ4	1600	20	3.168	—	S3025SA
鋁	7	D10	1960	18	17.562	—	S3025SA
	8	D10	440	8	1.971	—	S3025SA
	9	φ4	150	12	0.178	—	S3025SA
	10	φ4	260	6	0.154	—	S3025SA
	11	D10	1800	2	2.053	—	S3025SA
					97.312		
製品重量				2387	kg		

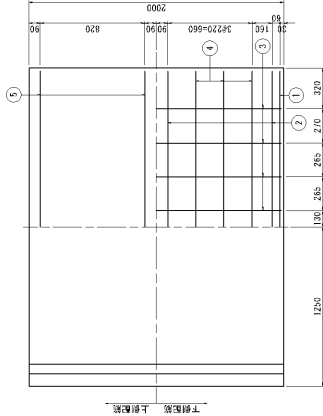

③D10-2本 L=1960

1960

④D10-4本 L=2440

2440


⑤φ4-20本 L=1000

1000

⑦D10-18本 L=1960

1960


⑧φ4-12本 L=150




⑩D10-2本 L=1800

1800

側面図



側面図





ワイドフレーム H1500xB2400

3-1 120

鉄筋加工図

①D16-2本 L=5160


②D16-4本 L=5840

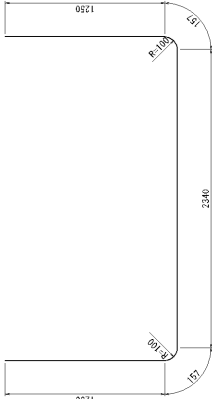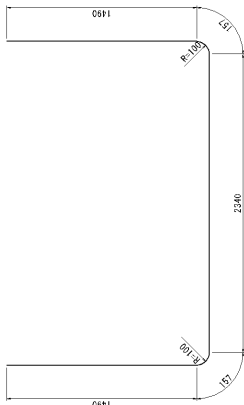


平面図

材料表 (一本当り)


種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D16	5160	2	16.099	—	SD295A
	2	D16	5840	4	35.194	—	SD295A
	3	D10	1960	8	8.781	—	SD295A
	4	D10	2640	6	8.534	—	SD295A
	5	D10	2640	4	5.690	—	SD295A
	6	φ4	1600	20	3.168	—	SD295A
筋	7	D10	1960	18	17.562	—	SD295A
	8	D10	440	8	1.471	—	SD295A
	9	φ4	130	12	0.178	—	SD295A
	10	φ4	260	6	0.134	—	SD295A
	11	D10	1800	2	2.053	—	SD295A
				計	99.414		
製品重量				2383	kg		

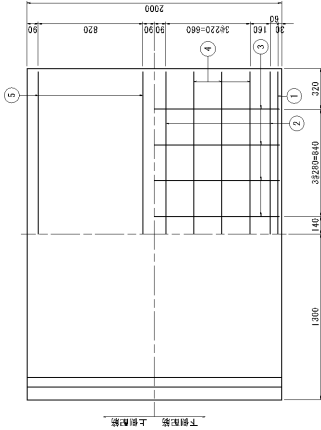


③D10-3本 L=1960





④D10-2本 L=2640




⑤φ4-20本 L=1600




⑥D10-1本 L=1800




側面図



断面図

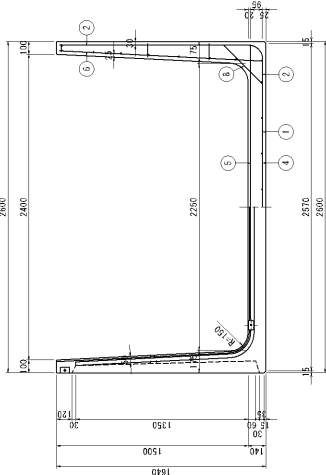

側面図













ワイドフレーム H1500xB2800

 $S=1:20$

鉄筋加工図

材料表 (一本当り)

標頭 No	型	尺	寸	数量	単位	形式	材質
底	1	D15	5566	2	17,347	□	S3025A
	2	D15	6040	4	37,590	□	S3025A
	3	D10	1966	10	9,978	□	S3025A
	4	D10	2940	6	14,978	□	S3025A
	5	D10	2940	4	6,386	□	S3025A
端	6	φ 4	1000	20	3,188	—	S3025A
	7	D10	1966	18	17,812	—	S3025A
	8	D10	440	8	1,971	—	S3025A
	9	φ 4	150	12	2,179	—	S3025A
	10	φ 4	266	6	0,154	—	S3025A
	11	D10	1660	2	2,833	—	S3025A
計					107,530		

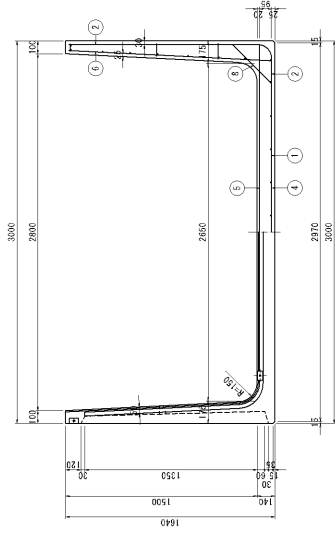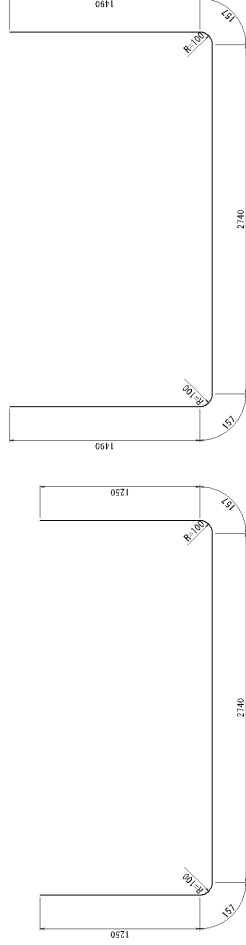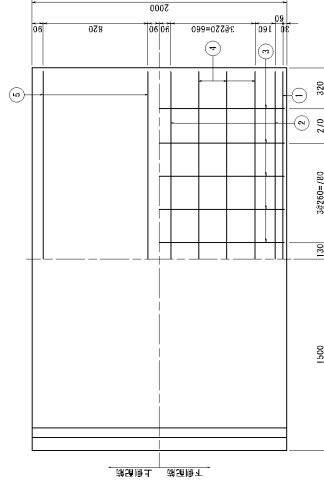


ワイドフレーム H1500xB2900

3=120

鉄筋加工図

①D16-2本 L=5660


②D16-4本 L=6140

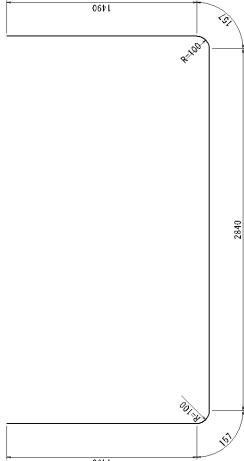

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D16	6660	2	17.659	—	S32B5A
	2	D16	6140	4	38.314	—	S32B5A
	3	D10	1660	10	10.976	—	S32B5A
	4	D10	3040	6	10.214	—	S32B5A
	5	D10	3040	4	6.810	—	S32B5A
	6	Φ4	1660	20	3.168	—	S32B5A
筋	7	D10	1660	18	17.562	—	S32B5A
	8	D10	440	8	1.971	—	S32B5A
	9	Φ4	150	12	0.178	—	S32B5A
	10	Φ4	260	6	0.154	—	S32B5A
	11	D10	1660	2	2.053	—	S32B5A
				計	109.629		
製品重量				3232	kg		

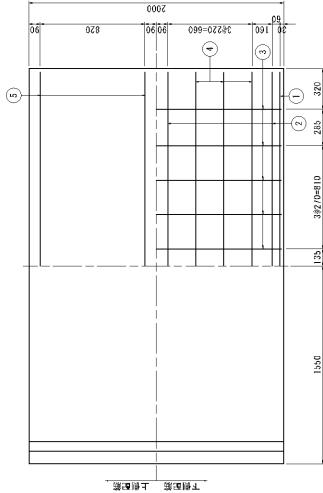


②D16-4本 L=6140

①D16-2本 L=5660


②D16-4本 L=3640

③D16-2本 L=1860


④D16-2本 L=1860




側面図



断面図

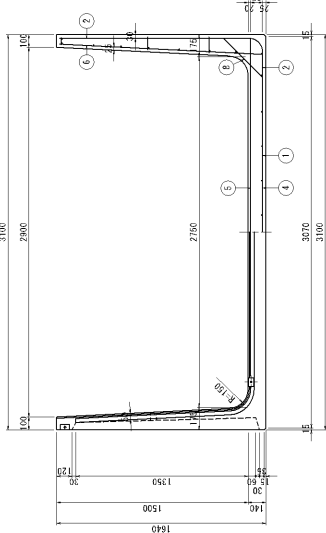

側面図




ワイドフレーム H1500xB3000

3=1 20

鉄筋加工図

①B16-2本 L=5740


②B16-4本 L=4240

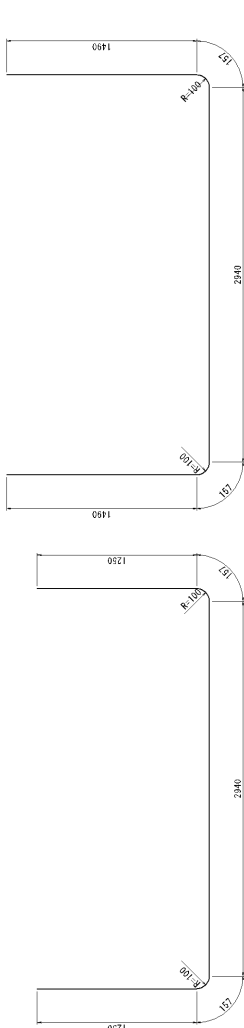

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D16	5740	2	17.971	—	S32B5A
	2	D16	6240	4	38.938	—	S32B5A
	3	D16	1660	10	10.976	—	S32B5A
	4	D16	3140	6	10.500	—	S32B5A
	5	D16	3140	4	7.634	—	S32B5A
	6	φ4	1600	20	3.168	—	S32B5A
筋	7	D16	1660	18	17.952	—	S32B5A
	8	D16	440	8	1.971	—	S32B5A
	9	φ4	150	12	0.178	—	S32B5A
	10	φ4	240	6	0.134	—	S32B5A
	11	D16	1660	2	2.053	—	S32B5A
	計				110.335		
製品重量				3323	kg		

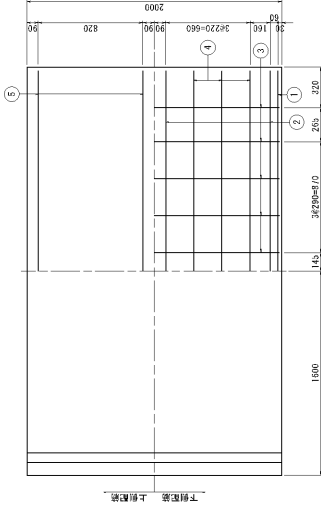

上側配筋 下側配筋

③D16-10本 L=1860


④D16-4本 L=3140

⑤D16-4本 L=3140


⑥φ4-20本 L=1660

⑦φ4-4本 L=1660


⑧D16-2本 L=1860



側面図




側面図



ワイフリューム H500xB300

2-110


鉄筋加工図

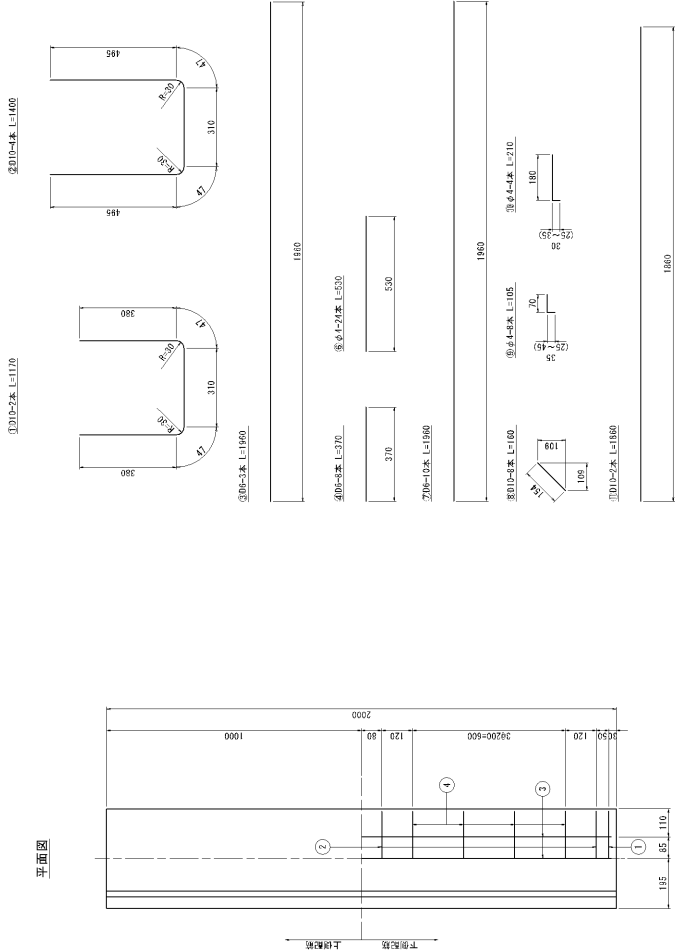


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (本)	重量 (kg)	形状	材質
1	D10	1170	2	1.310	U	S32B5A
2	D10	1400	4	3.126	U	S32B5A
3	D6	1860	3	1.464	—	S32B5A
4	D6	370	8	0.737	—	S32B5A
5	—	—	—	—	—	—
6	φ4	530	24	1.259	—	S32B5A
7	D6	1860	8	3.904	—	S32B5A
8	D10	160	8	0.717	—	S32B5A
9	φ4	106	8	0.063	—	S32B5A
10	φ4	210	4	0.063	—	S32B5A
11	D10	1860	2	2.083	—	S32B5A
計				14.776		
製品重量				374	kg	


側面図

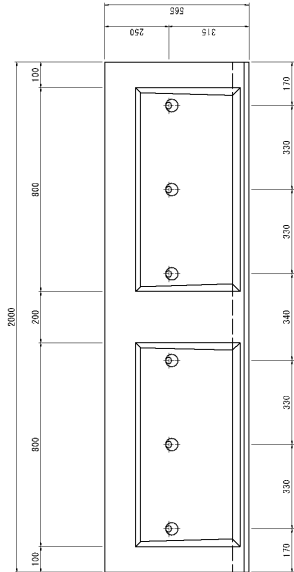

断面図



側面図

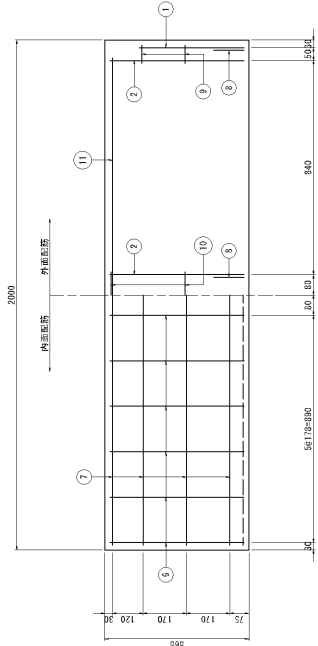


ワイドフレーム H500xB400

2-110


材料表 (一本当り)

種別No	径 (mm)	本数	重量 (kg)	形状	材質
1	D10	2	1.270	—	SUS304
2	D10	1600	4	3.360	—
3	D6	1660	3	1.464	—
4	D6	470	8	0.606	—
5	—	—	—	—	—
6	φ4	530	24	1.250	SUS304
7	D6	1660	8	3.904	—
8	D10	160	8	0.717	SUS304
9	φ4	106	8	0.083	SUS304
10	φ4	210	4	0.083	SUS304
11	D10	1660	2	2.083	SUS304
計					
計			15.311		
部品重量		405	kg		


平面図

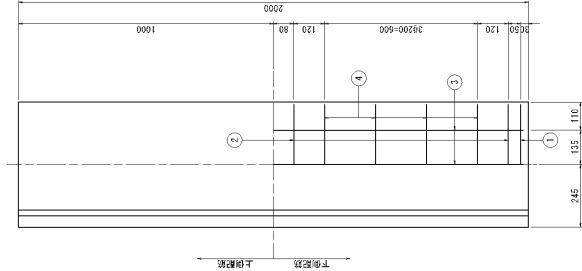


縁部加工図

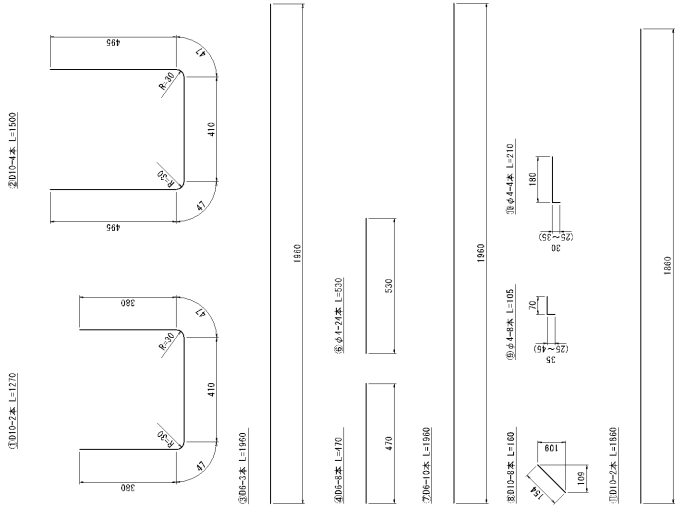


側面図

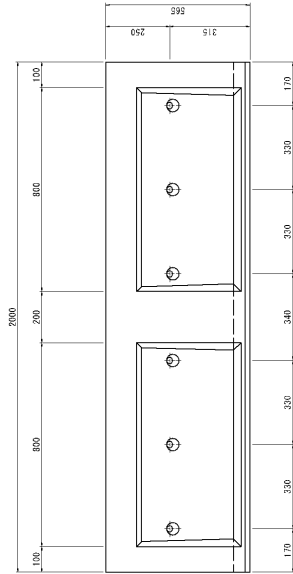

断面図




側面図

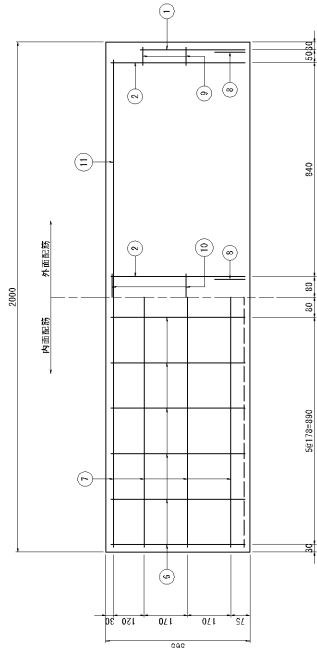


ワイフリューム H500xB500

2-110

継ぎ加工図

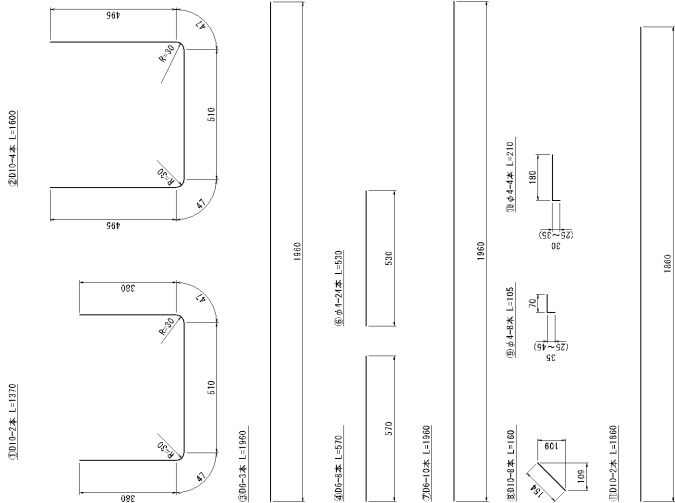


平面図

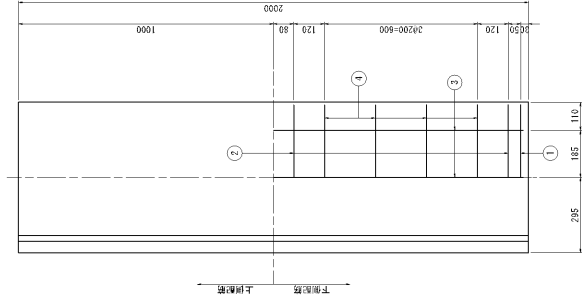


材料表 (一本当り)

材料No.	径 (mm)	本数	重量 (kg)	形状	材質
1	D10	2	1.524	U	SUS304
2	D10	4	3.048	U	SUS304
3	D6	3	1.464	—	SUS304
4	D6	8	1.152	—	SUS304
5	—	—	—	—	—
6	φ4	520	24	—	SUS304
7	D6	1660	8	—	SUS304
8	D10	160	8	—	SUS304
9	φ4	105	8	—	SUS304
10	φ4	210	4	—	SUS304
11	D10	1660	2	—	SUS304
計			495		
部品重量			495		


側面図

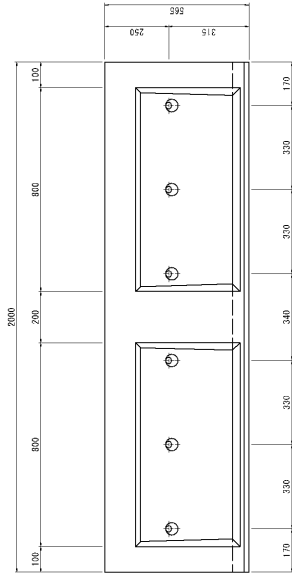

断面図




側面図

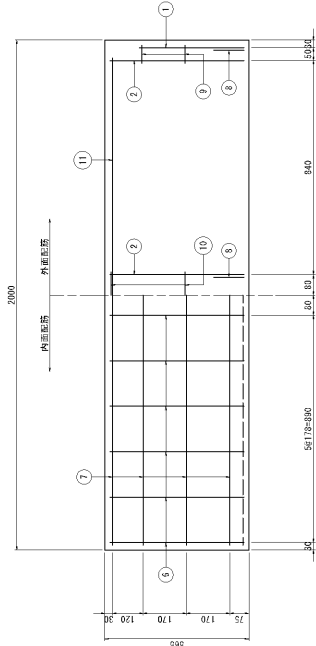


ワイドフレーム H500xB600

2-110

鉄筋加工図

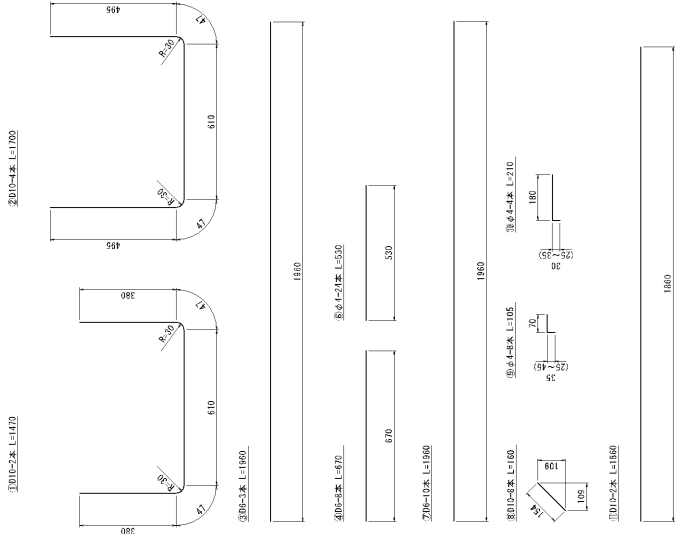


平面図

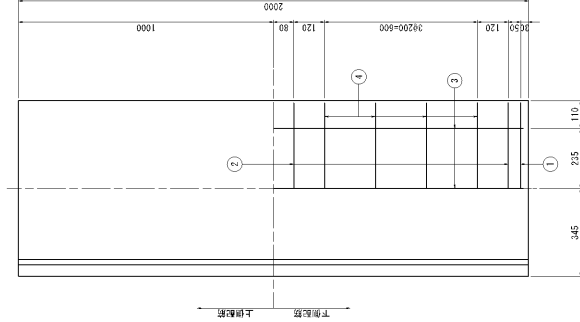


材料表 (一本当り)

種別	No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D10	1470	2	1.646	U	S32B5A
	2	D10	1700	4	3.808	U	S32B5A
	3	D6	1860	3	1.464	—	S32B5A
	4	D6	670	8	1.355	—	S32B5A
	5	—	—	—	—	—	—
	6	Φ4	530	24	1.259	—	S32B5A
	7	D6	1860	8	3.904	—	S32B5A
	8	D10	160	8	0.717	—	S32B5A
	9	Φ4	105	8	0.083	—	S32B5A
	10	Φ4	210	4	0.083	—	S32B5A
	11	D10	1860	2	2.083	—	S32B5A
筋							
計					16.332		
製品重量					466	kg	


側面図

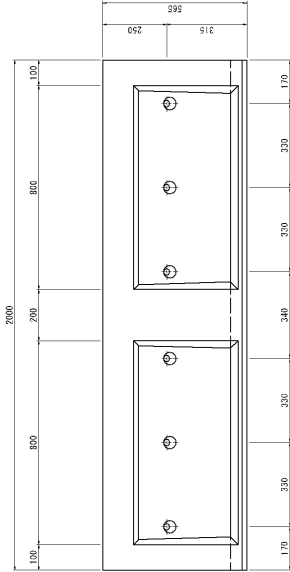

断面図




側面図

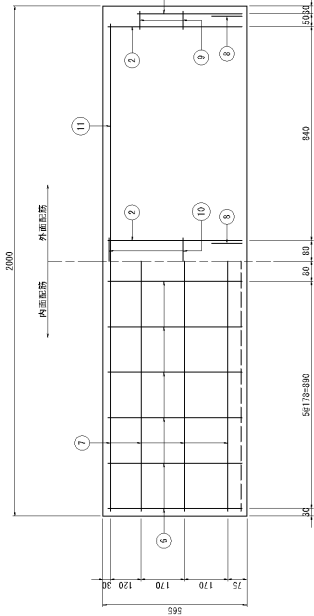


ワイフリューム H500xB700

2-110

鉄筋加工図

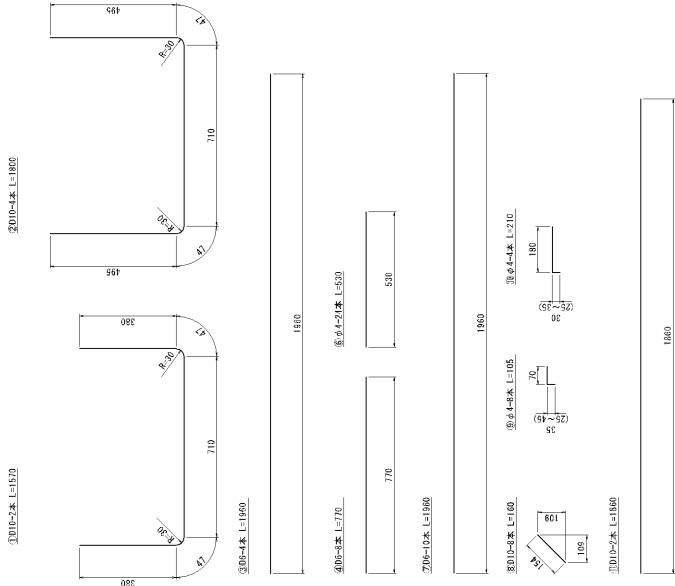


平面図

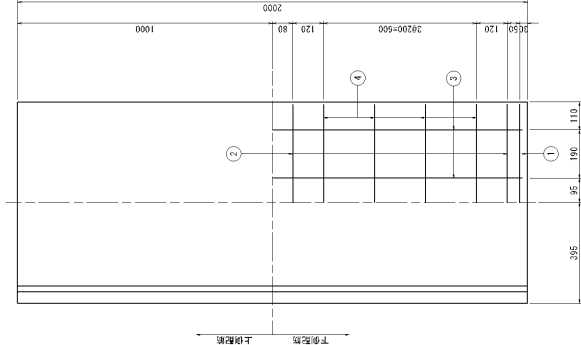


材料表 (一本当り)

種別No	径 (mm)	本数	重量 (kg)	形状	材質
1	D10	2	1.758	U	S32B5A
2	D10	4	4.032	U	S32B5A
3	D6	8	1.862	—	S32B5A
4	D6	8	1.524	—	S32B5A
5	—	—	—	—	—
6	φ4	530	24	—	S32B5A
7	D6	1960	8	—	S32B5A
8	D10	180	8	—	S32B5A
9	φ4	105	8	—	S32B5A
10	φ4	210	4	—	S32B5A
11	D10	1860	2	—	S32B5A
計					
部品重量			497	kg	


側面図

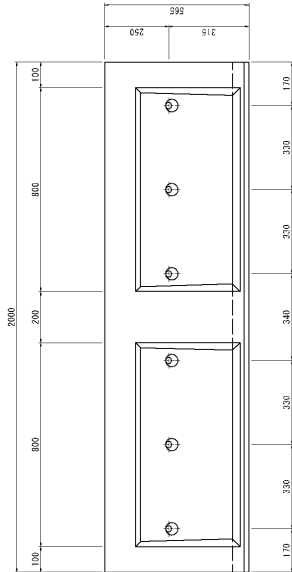

断面図



側正図

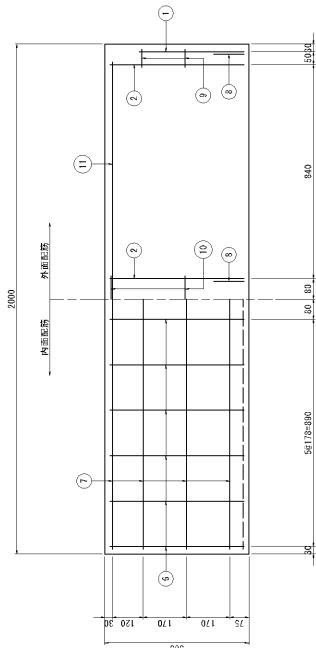


ワイフリューム H500xB800

2-110


材料表 (一本当り)

種別No	径 (mm)	本数	重量 (kg)	形状	材質	
1	D10	1670	2	1.870	U	S320SA
2	D10	1900	4	4.296	U	S320SA
3	D6	1960	4	1.962	—	S320SA
4	D6	870	8	1.733	—	S320SA
5	—	—	—	—	—	—
6	φ4	530	24	1.259	—	S320SA
7	D6	1960	8	3.904	—	S320SA
8	D10	160	8	0.717	—	S320SA
9	φ4	106	8	0.083	—	S320SA
10	φ4	210	4	0.083	—	S320SA
11	D10	1660	2	2.083	—	S320SA
計						
						17.940
部品重量				527	kg	


平面図

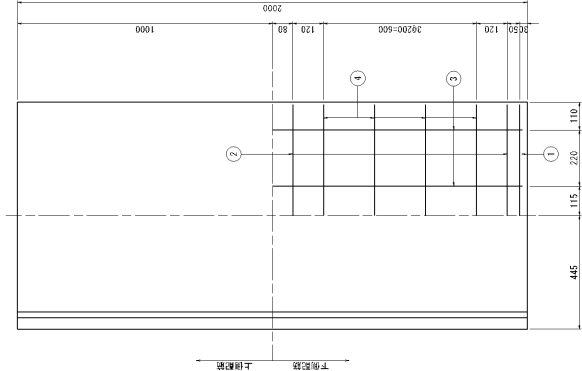


継ぎ加工図

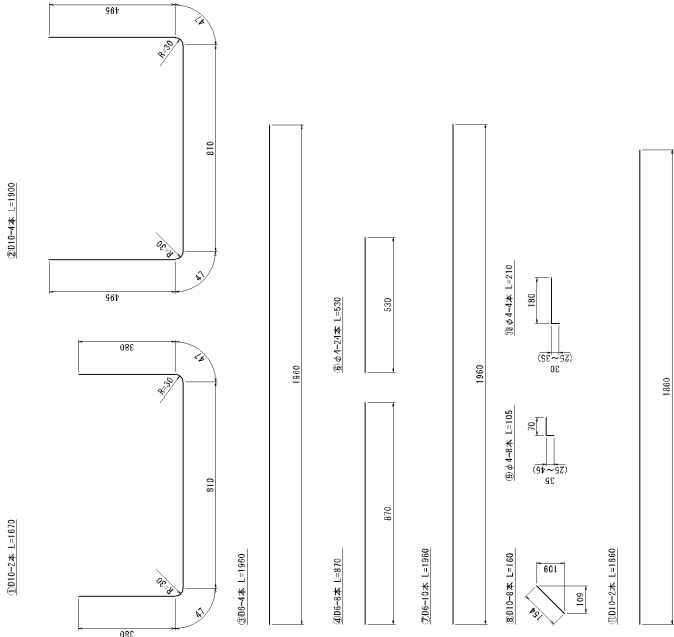


側面図

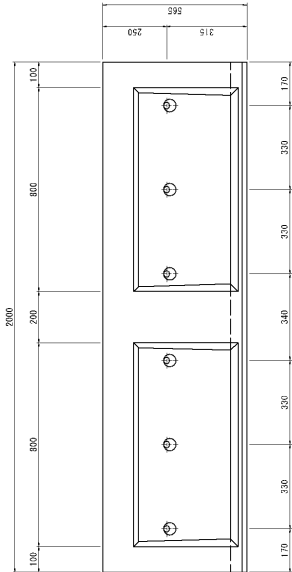

断面図

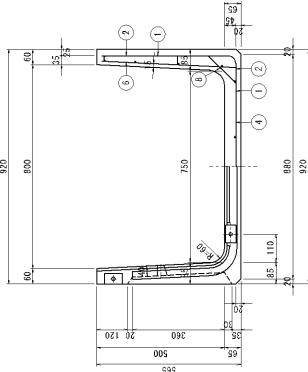


側面図

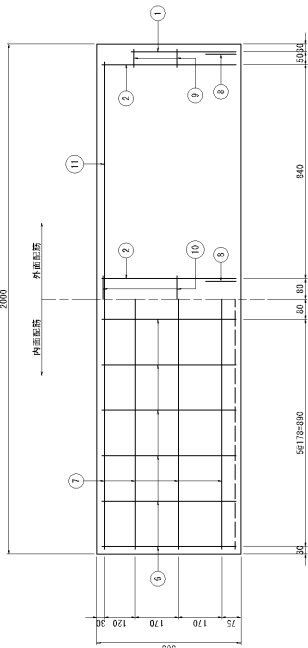


ワイフリューム H600xB500

2-110

鉄粉加工図

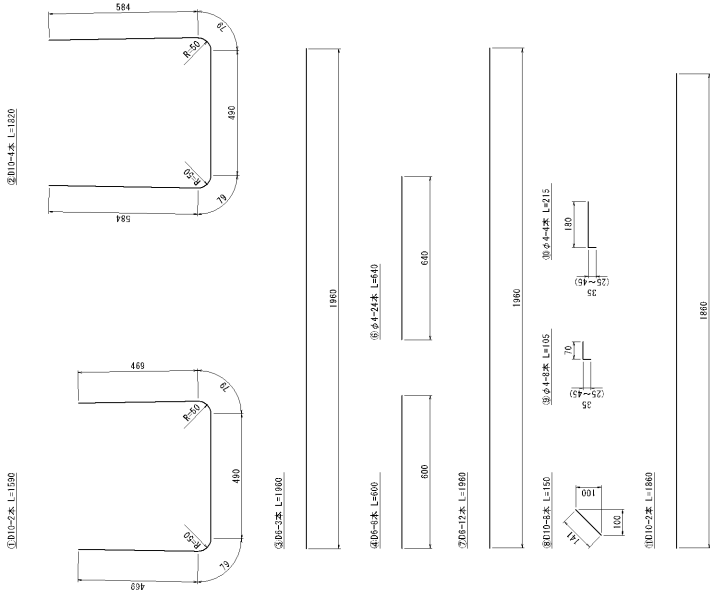


平面図

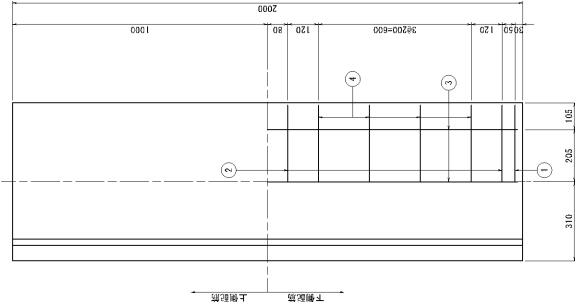


材料表 (一本当り)

種別	N.0	径	長さ	本数	重量	形状	材質
鉄	1	D10	1500	2	1.781	U	SPC55A
	2	D10	1820	4	4.077	U	SPC55A
	3	D6	1500	2	1.464	U	SPC55A
	4	D6	600	8	1.195	U	SPC55A
	5	-	-	-	-	-	-
	6	φ4	640	24	1.521	-	SPC55A
	7	D6	1800	10	4.580	-	SPC55A
	8	D10	150	8	0.672	-	SPC55A
	9	φ4	105	8	0.063	-	SPC55A
	10	φ4	215	4	0.063	-	SPC55A
	11	D10	1800	2	2.053	-	SPC55A
筋							
計					17.841		
製品重量					493	kg	


側面図

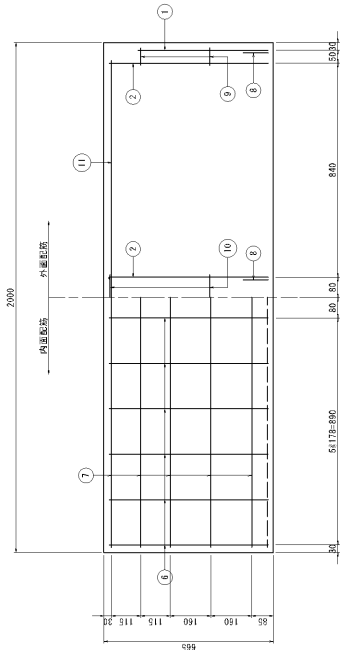

断面図



側面図

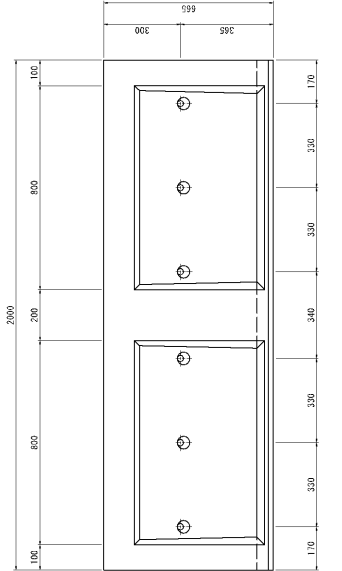

ワイドフレーム H600xB600

 $s=1:10$


材料表 (一本当り)

規格・N・O 性	長さ (mm)	寸さ	本数 (個)	形状	材質
1	100	1890	2	1.852	SP231A
2	100	1290	4	2.301	SP231A
3	105	1960	3	1.654	SP231A
4	105	700	6	1.264	SP231A
5	—	—	—	—	—
6	φ 4	640	24	1.321	SP231A
7	100	1960	10	4.850	SP231A
8	100	1590	8	0.672	SP231A
9	φ 4	105	8	0.031	SP231A
10	φ 4	215	4	0.083	SP231A
11	100	1860	2	2.053	SP231A
計			18,376		


加工数量 5/4 ㎏

箱


平面图图

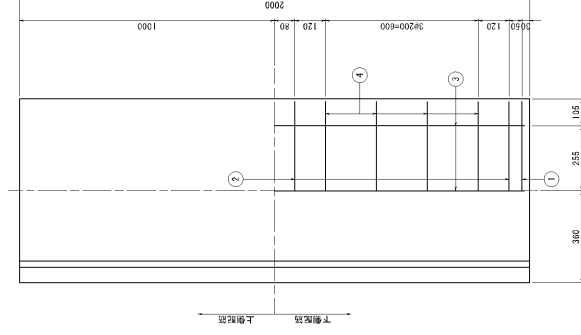


鉄筋加工図

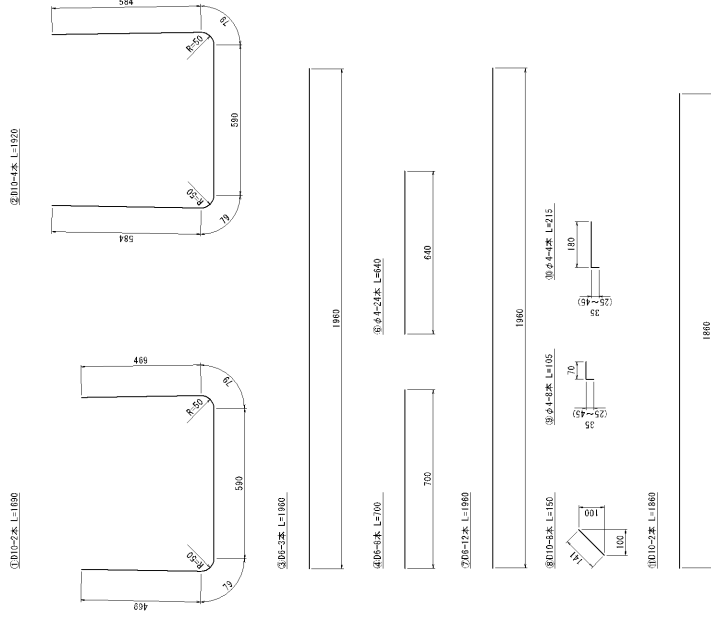


側面図

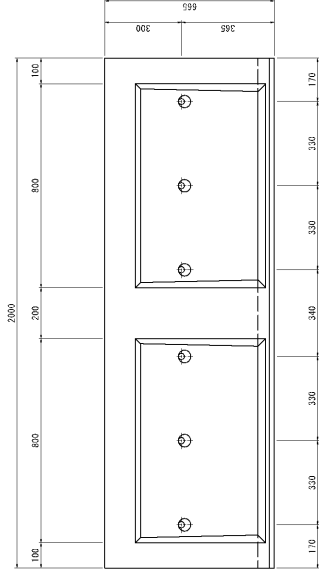

断面图




側面図

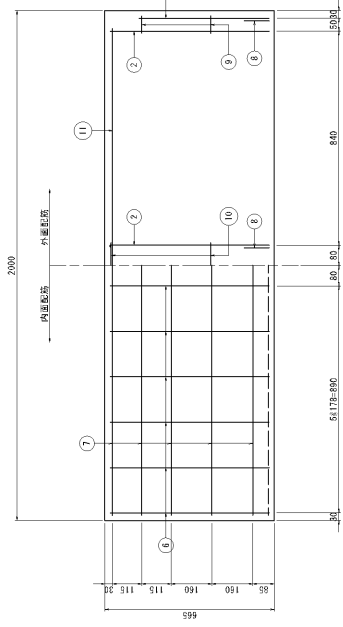


ワイドフレーム H600xB700

2-110

鉄粉加工図

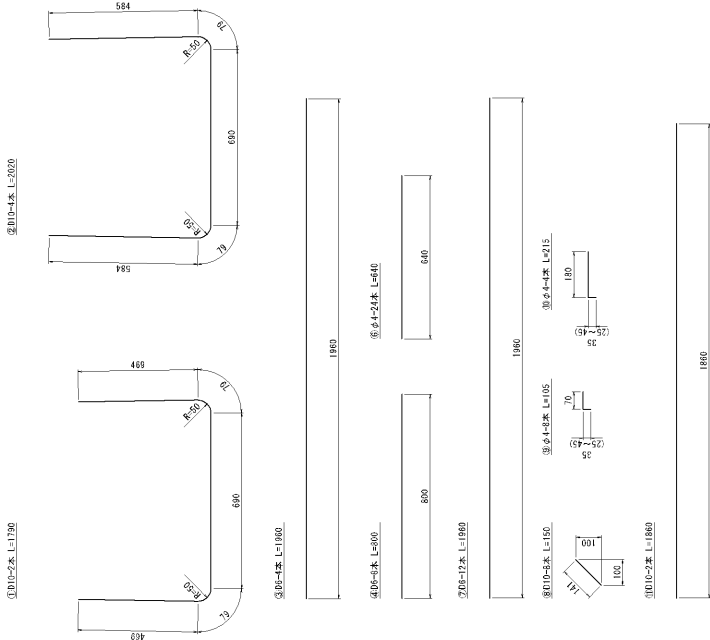


平面図

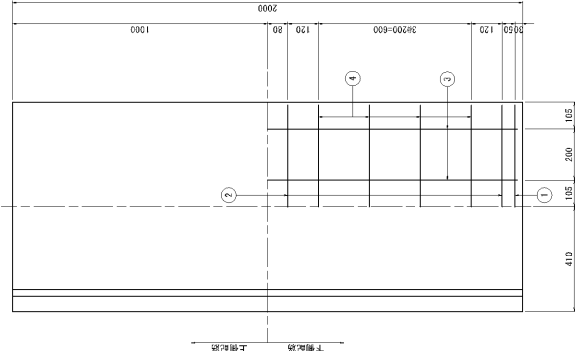


材料表 (一本当り)

種別	N	φ	寸法	本数	重量	形状	材質
鉄	1	D10	1790	2	2.005	U	SP73SA
	2	D10	2020	4	4.525	U	SP73SA
	3	D6	1860	4	1.867	U	SP73SA
	4	D6	800	8	1.594	U	SP73SA
	5	-	-	-	-	-	-
	6	φ4	640	24	1.521	-	SP73SA
	7	D6	1860	10	4.580	U	SP73SA
	8	D10	150	8	0.672	U	SP73SA
	9	φ4	105	8	0.063	U	SP73SA
	10	φ4	215	4	0.063	U	SP73SA
	11	D10	1860	2	2.063	U	SP73SA
筋							
計					19.400		
製品重量					554	kg	


側面図

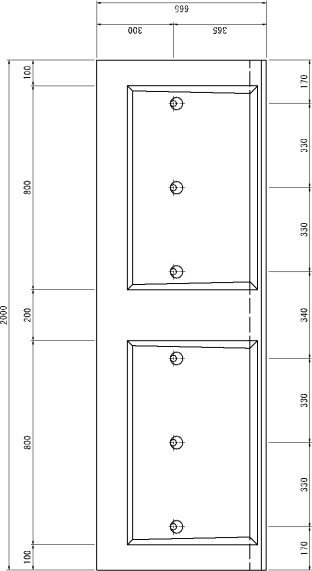

断面図

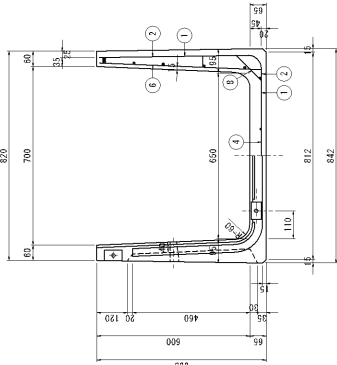

側面図





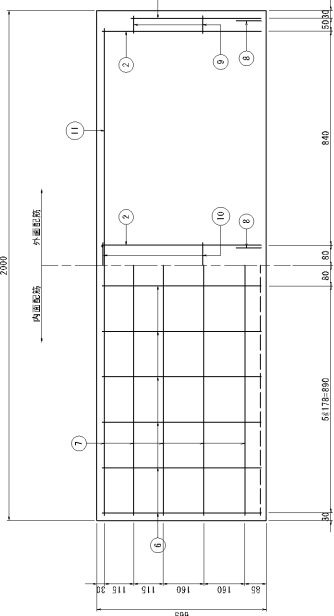


ワイドフレーム H600xB800

 $s=1:10$

材料表 (一本当り)

種類	N	性	長 (mm)	さ	本数 (個)	形状	材質
鉄	1	100	1880	2	4,747	□	SJ231A
	2	100	2190	4	4,749	□	SJ231A
	3	05	1860	4	1,852	—	SJ231A
	4	05	900	4	1,792	—	SJ231A
	5	—	—	—	—	—	—
	6	04	640	24	1,321	—	SJ231A
	7	06	1950	10	4,850	—	SJ231A
鋁	8	100	1960	4	0,672	—	SJ231A
	9	04	105	8	0,093	—	SJ231A
	10	04	215	4	0,083	—	SJ231A
	11	100	1860	2	2,053	—	SJ231A
	12	—	—	—	—	—	—
計					19,935		
加工数量			555	kg			

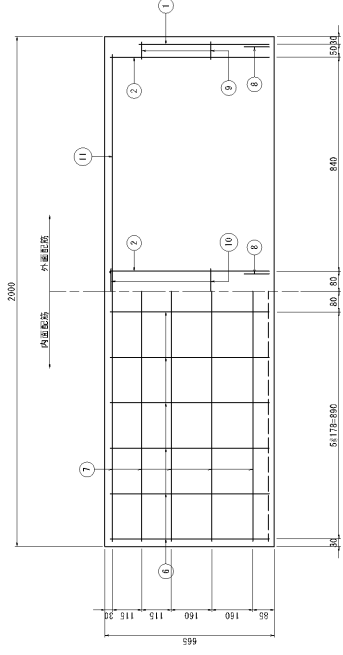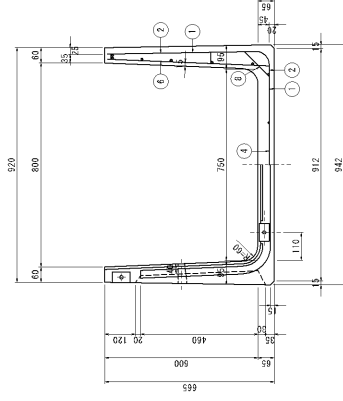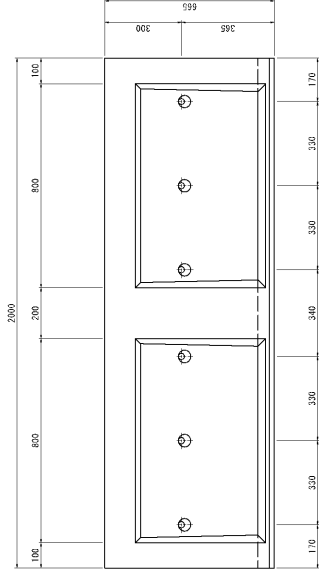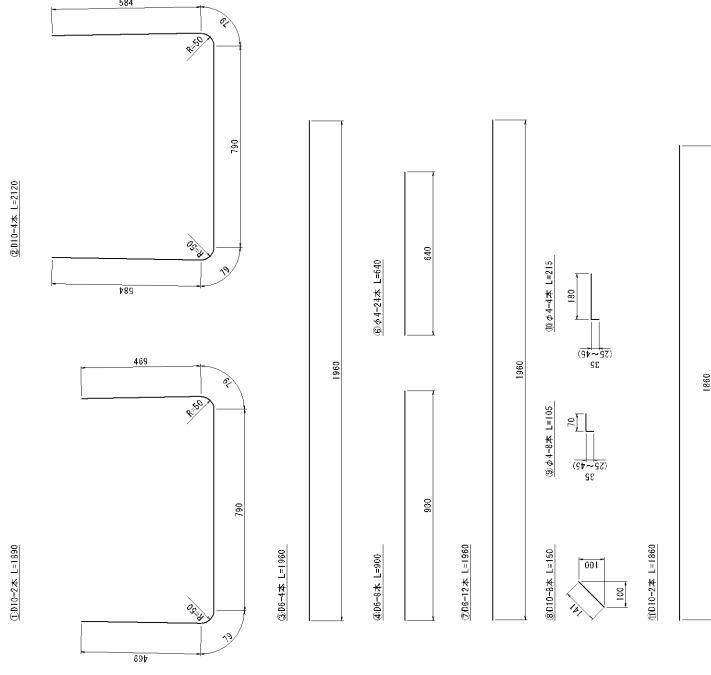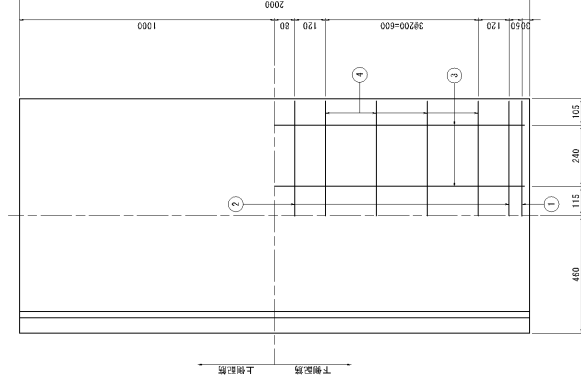


ワイドフレーム H600xB900


$$S=1:10$$

材 料 表 (一本当り)									
部 品 名	No	寸 法	材 質		重 量		材 質		備 考
			本 数	φ 寸 (mm)	重 量	材 質			
軸	1	D10	1960	2	2.278	—	SP313A		
	2	D10	2220	4	4.573	—	SP313A		
	3	φ6	1960	4	1.582	—	SP313A		
	4	φ6	1060	2	1.582	—	SP313A		
	5	—	—	—	—	—	—		
	6	—	—	—	—	—	—		
	7	—	—	—	—	—	—		
	8	—	—	—	—	—	—		
	9	—	—	—	—	—	—		
	10	—	—	—	—	—	—		
	11	D10	1960	2	2.263	—	SP313A		
計					20.070				
部品数量		615				kg			

材料表 (一本当り)

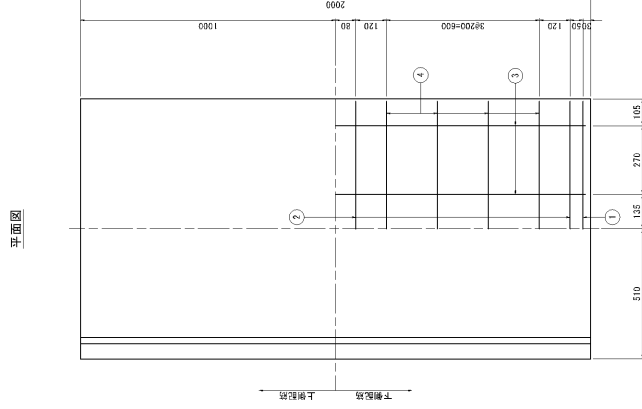

平面图

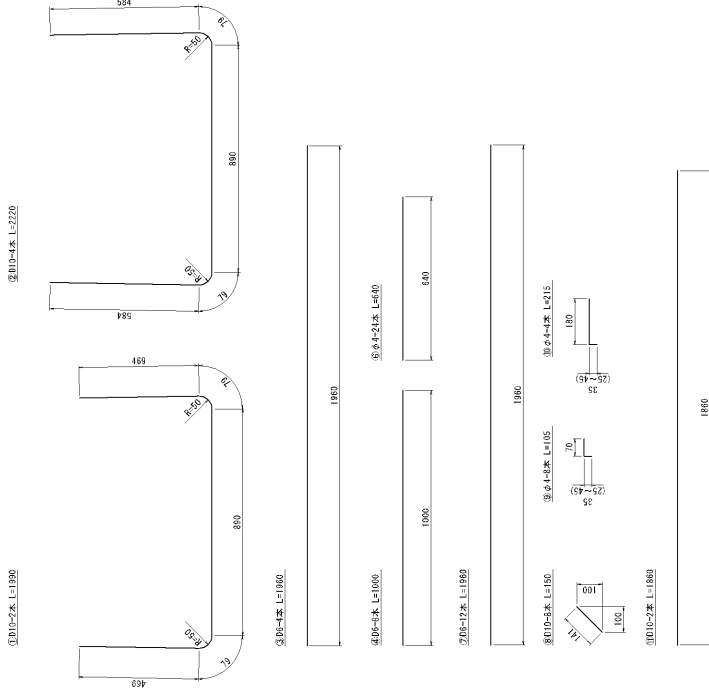

側面図



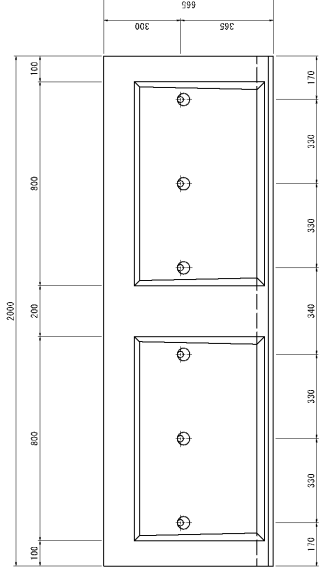


圖 10

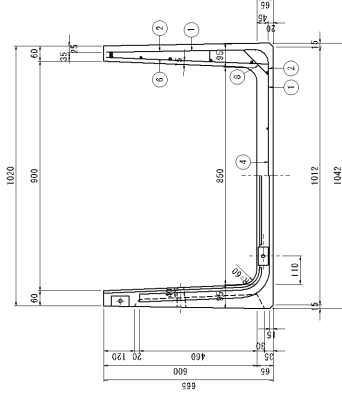


側面図

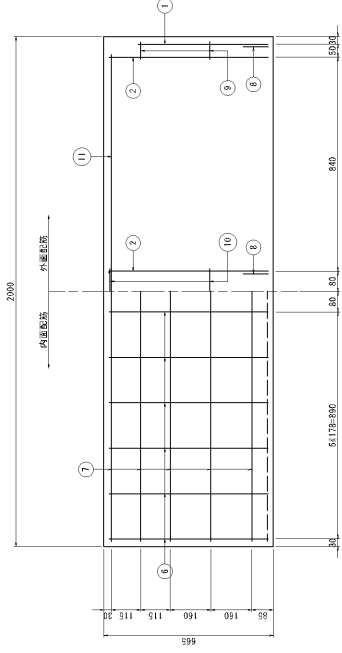


ワイドフレーム H600xB1000

3=110

鉄筋加工図

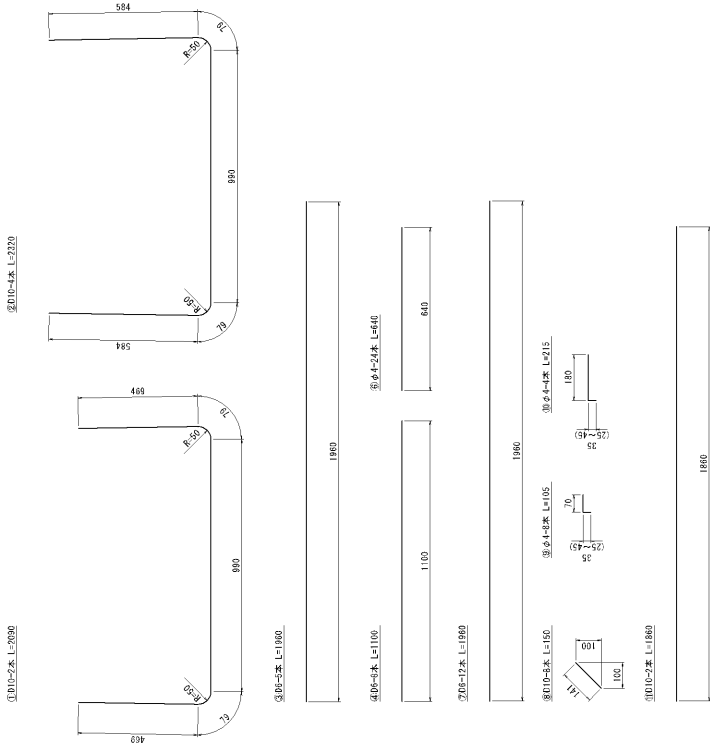


平面図

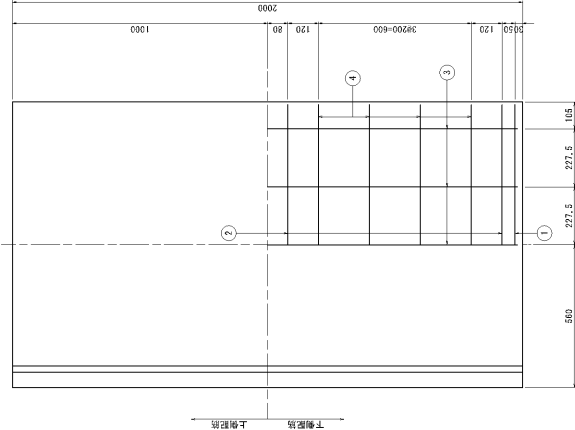


材料表 (一本当り)

種別No	役	長さ (mm)	本数	重量 (kg)	形状	材質
1	D10	2000	2	2.541	└┐	SD35A
2	D10	2250	4	5.197	└┐	SD35A
3	D10	1960	5	2.440	└┐	SD35A
4	D10	1100	8	2.191	└┐	SD35A
5	-	-	-	-	-	-
6	D6	640	24	1.521	└┐	SD35A
7	D6	1960	10	4.580	└┐	SD35A
8	D10	150	8	0.672	└┐	SD35A
9	D6	105	8	0.052	└┐	SD35A
10	D6	215	4	0.055	└┐	SD35A
11	D10	1860	2	2.053	└┐	SD35A
計						
総重量						64.6 kg


側面図

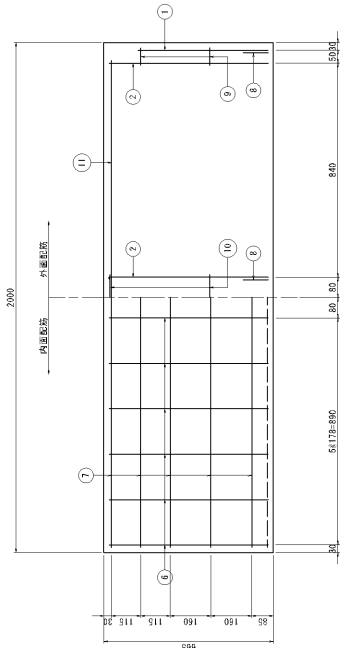

断面図

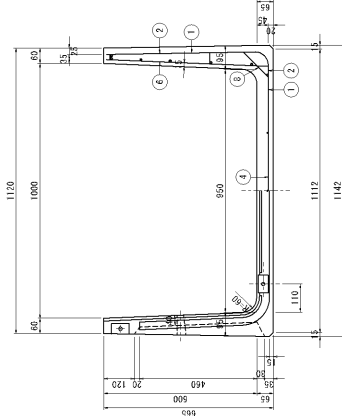

側面図

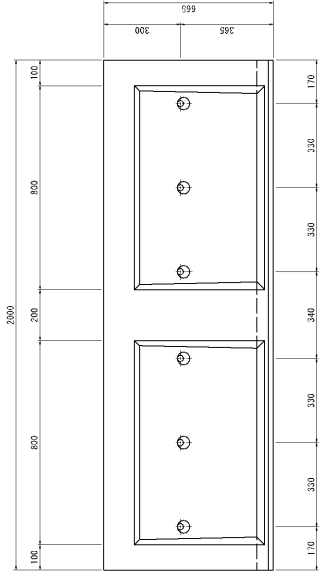


ワイドフレーム H600xB1200

2=110


鉄筋加工図

①D10-2本 L=2720

②D10-2本 L=2720

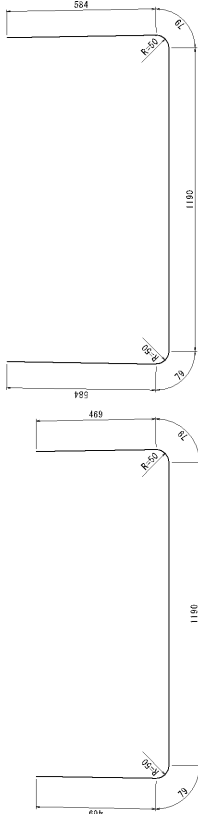


平面図

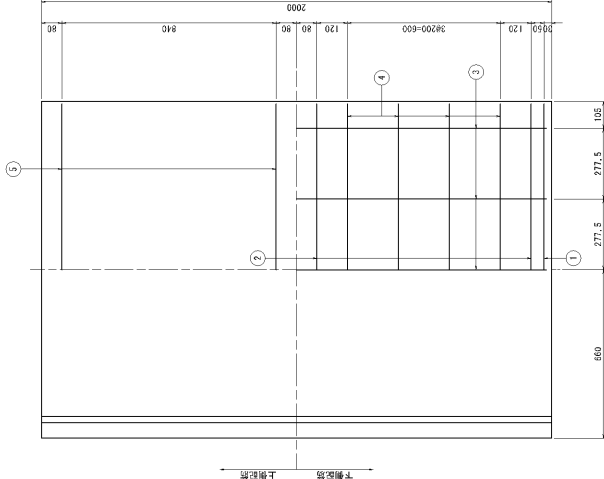


材料表 (一本当り)

種類	N. of 径	長さ (mm)	本数	重量 (kg)	形状	材質	
鉄	1	D10	2720	2	2.585	┐┌	SP531A
	2	D10	2520	4	5.645	┐┌	SP531A
	3	D6	1860	5	2.440	┐┌	SP531A
	4	D6	1300	8	2.500	┐┌	SP531A
	5	D6	1300	4	1.295	┐┌	SDS55A
	6	φ4	640	24	1.521	┐┌	SP531A
	7	D6	1860	10	4.580	┐┌	SP531A
	8	D10	150	8	0.672	┐┌	SP531A
	9	φ4	105	8	0.052	┐┌	SP531A
	10	φ4	215	4	0.052	┐┌	SP531A
	11	D10	1860	2	2.052	┐┌	SP531A
筋							
計				23.839			
製品重量				707	kg		


側面図

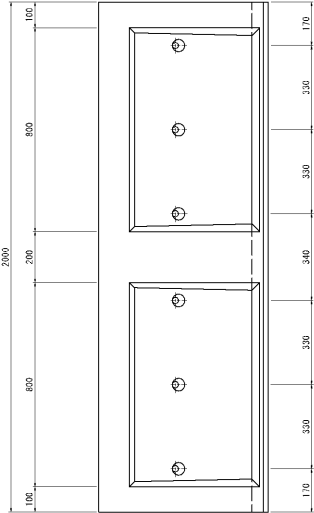

断面図

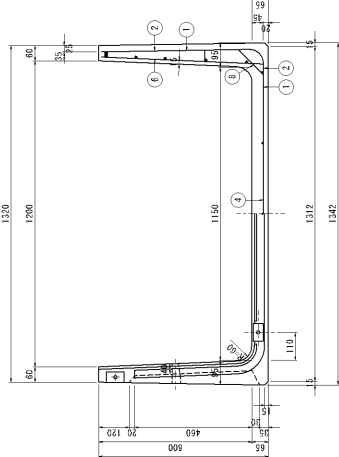


側面図

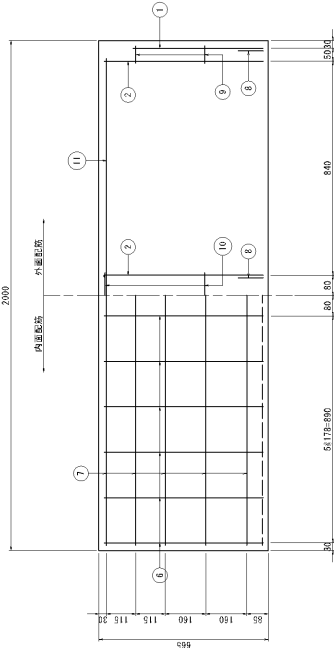






ワイドフレーム H700xB400

515

鉄筋加工図

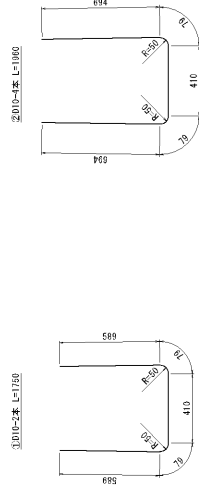

類別No	定具	式	本數(量)	形狀	材質
1	D10	1750	2	1,450	S2245A
2	D10	1960	4	1,960	S2245A
3	D6	1960	3	1,464	S2245A
4	D6	520	8	1,038	S2245A
5	—	—	—	—	—
6	5-4	750	20	1,465	S2245A
7	D6	1960	10	4,660	S2245A
8	D10	220	8	0,988	S2245A
9	5-4	120	6	0,095	S2245A
10	5-4	225	4	0,069	S2245A
11	D10	1960	2	2,083	S2245A
計				18,463	

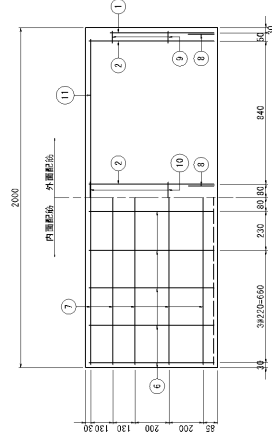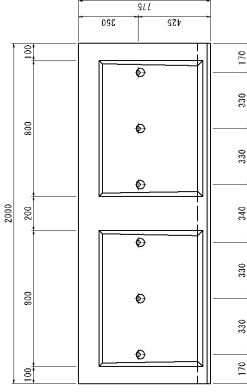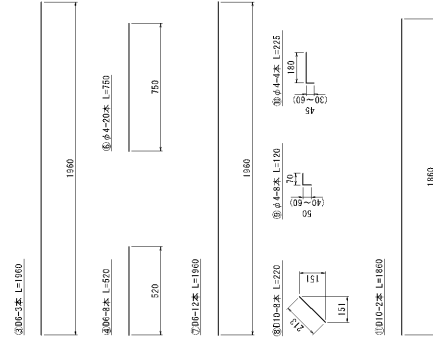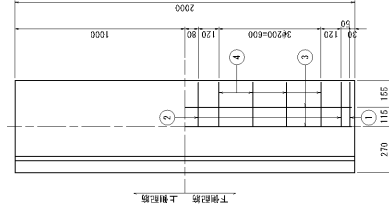

ワイドフレーム H700xB500

$$S=1:15$$

鉄筋加工図



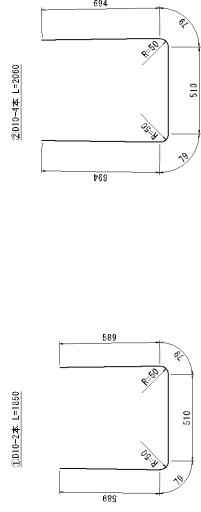



圖 恒斗

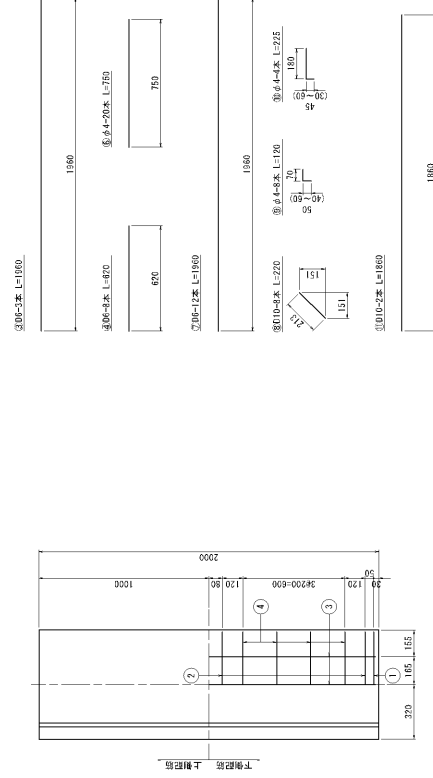


側面図

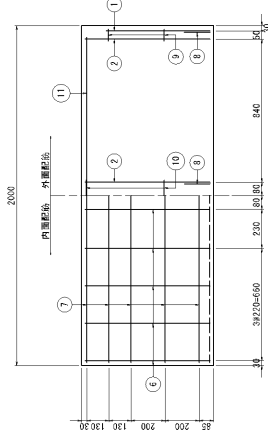

斷面図



側面図

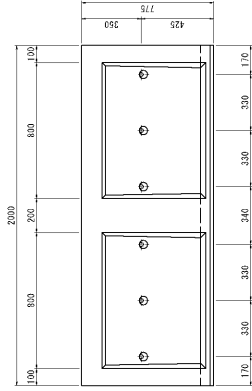

材料表 (一本当り)

類別No	座号	本数	数量	形状	材料	
鐵	1	010	1850	2	2,072	532414
	2	010	2060	4	4,814	532414
	3	06	1960	3	1,464	532414
	4	06	620	8	1,238	532414
	5	—	—	—	—	532414
	6	54	750	20	1,485	532414
	7	06	1660	10	4,650	532414
	8	010	220	8	988	532414
	9	54	120	6	995	532414
	10	54	225	4	869	532414
漆	11	010	1680	2	2,083	532414
	計				19,093	
單位數量			621	54		

製品番号

ワイドフレーム H700xB600

$$S=1:15$$

鉄筋加工図



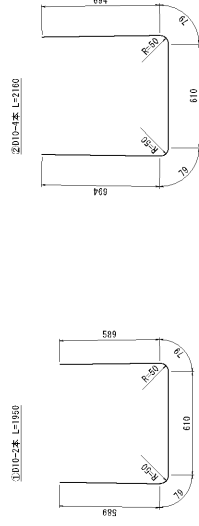



圖 10-11

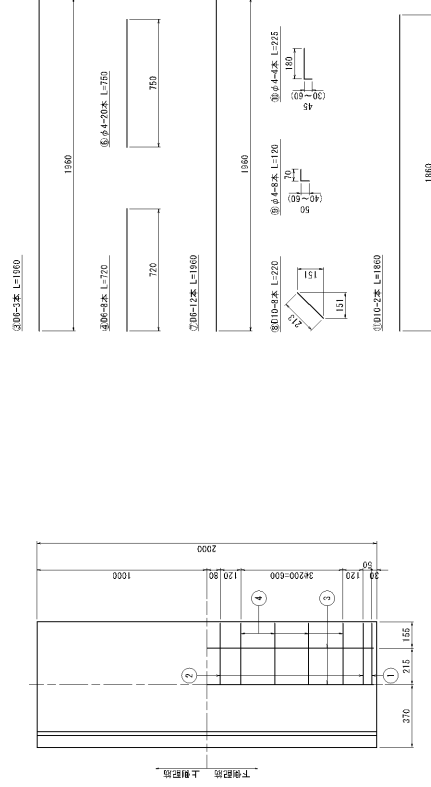


側面圖

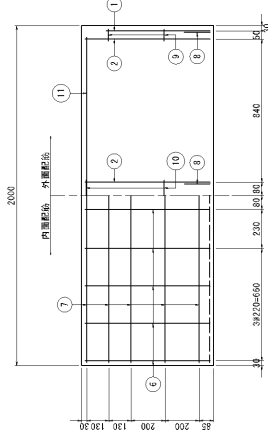

断面図



側面図

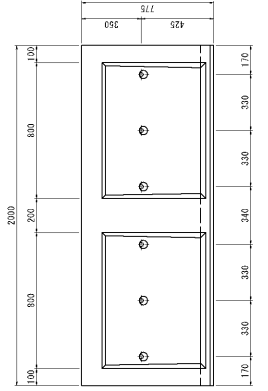


材料表 (一本当り)

種類	N ₂ O 容 (mm)	七 本	重量 (g)	形状	材質	
鉄	1	D10	1950	2	1,484	SJ245A
	2	D10	2160	4	1,838	SJ245A
	3	D6	1980	3	1,484	SJ245A
	4	D6	220	8	1,424	SJ245A
	5	—	—	—	—	—
鋁	6	φ4	750	20	1,485	SJ245A
	7	D6	1960	10	4,500	SJ245A
	8	D10	220	8	988	SJ245A
	9	φ4	120	6	0,995	SJ245A
	10	φ4	225	4	689	SJ245A
銅	11	D10	1860	2	2,083	SJ311A
	計				19,328	
重量			556			

ワイドフレーム H700xB700

2-115


鉄筋加工図

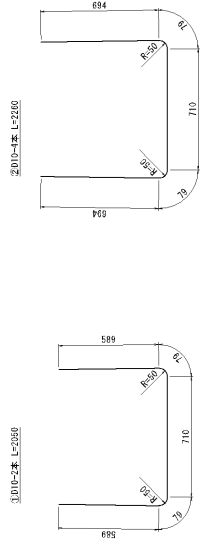


平面図

材料表 (一本当り)

種別No	径	長さ (mm)	本数 (本)	重量 (kg)	形状	材質
1	Ø10	2050	2	2.796	U	S3245A
2	Ø10	2050	4	5.062	U	S3245A
3	Ø6	1860	4	1.952	—	S3245A
4	Ø6	820	8	1.623	—	S3245A
5	—	—	—	—	—	—
6	Ø4	750	20	1.465	—	S3245A
7	Ø6	1860	8	4.689	—	S3245A
8	Ø4	750	8	0.605	—	S3245A
9	Ø4	125	8	0.095	—	S3245A
10	Ø4	225	4	0.062	—	S3245A
11	Ø10	1860	2	2.063	—	S3245A
筋						
				製品重量	692 kg	
				計	20.561	

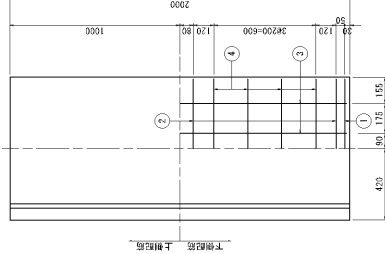

③100-4本 L=1860



④100-4本 L=750



⑤100-12本 L=1860



⑥100-8本 L=220




⑦100-8本 L=120




⑧100-2本 L=1860




側面図

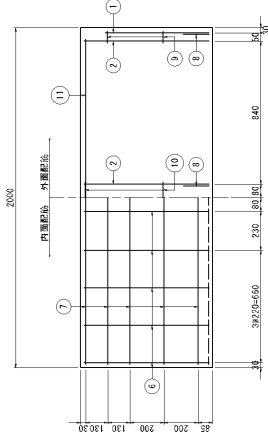

断面図




側面図

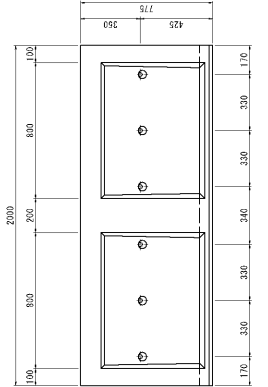


ワイドフレーム H700xB800

515


鐵筋加工圖

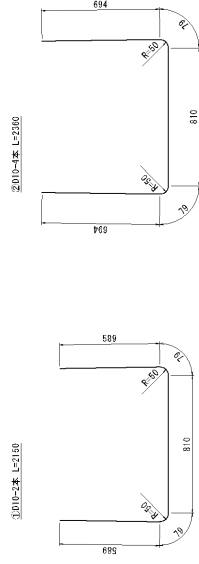


图例

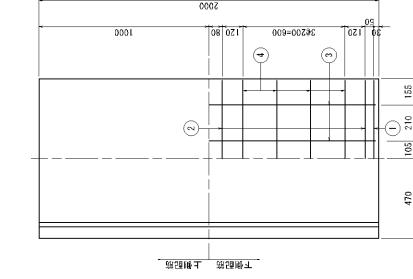


側面図

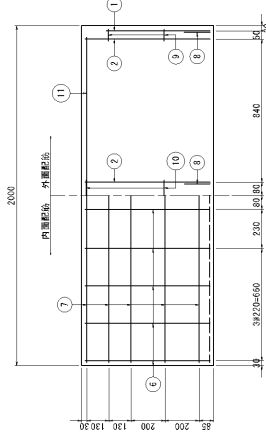

断面图



側面図


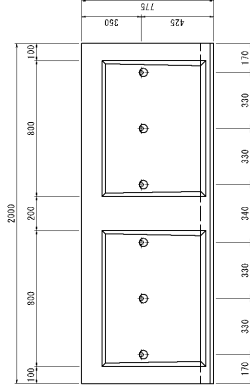


材料表 (一本当り)






類別No	定具	式樣	數量(臺)	形狀	材質
1	D10	2150	2	2.403	S2245A
2	D10	2350	4	2.386	S2245A
3	D6	1960	4	1.952	S2245A
4	D6	920	8	1.833	S2245A
5	—	—	—	—	—
6	5.4	750	20	1.465	S2245A
7	D6	1960	10	4.650	S2245A
8	D10	220	8	0.988	S2245A
9	5.4	120	6	0.095	S2245A
10	5.4	225	4	0.089	S2245A
11	D10	1960	2	2.033	S2245A
計			21.093		

ワイドフレーム H700xB1000

鉄筋加工図

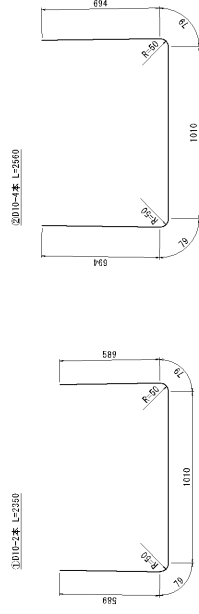


類別 No	徑	量	孔	本數	量	形	材
		(mm)					
鐵	1	D10	2550	2	2,832	—	S2245A
	2	D10	2650	4	5,724	—	S2245A
	3	D6	1960	5	2,440	—	S2291A
	4	D6	1120	8	2,211	—	S2291A
	5	—	—	—	—	—	—
鋁	6	φ 4	750	20	1,465	—	S2291A
	7	D6	1960	10	4,500	—	S2291A
	8	D10	2200	8	9,988	—	S2291A
	9	φ 4	120	6	9,995	—	S2291A
	10	φ 4	225	4	6,869	—	S2291A
	11	D10	1680	2	2,883	—	S2291A
筋	計				22,455		

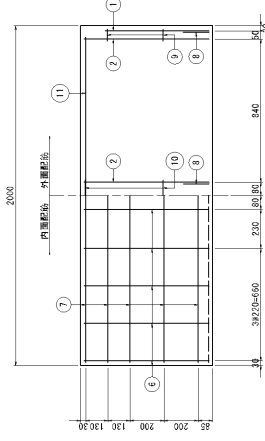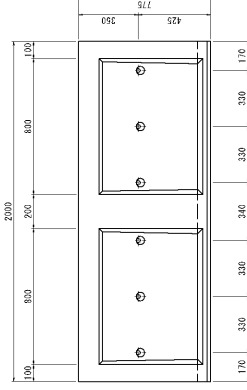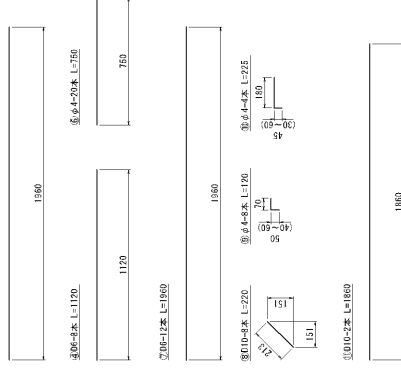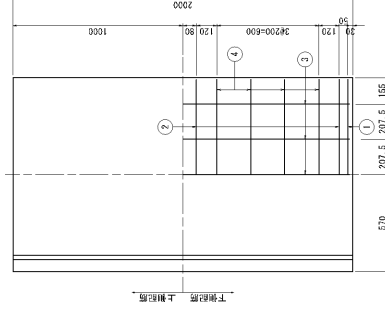

ワイドフレーム H700xB1100

2-1 15


鉄筋加工図

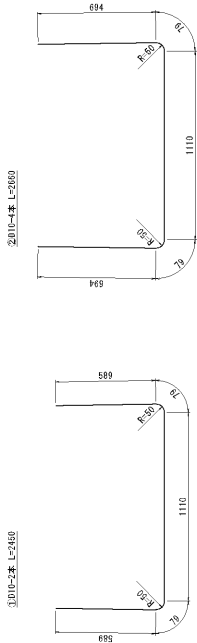

平面図


材料表 (一本当り)

種別No	径	長さ (mm)	本数 (x本)	重量 (kg)	形状	材質
1	D10	2450	2	2.744	U	S328YA
2	D10	2650	4	5.958	U	S328YA
3	D6	1860	5	2.400	—	S328YA
4	D6	1220	8	2.430	—	S328YA
5	—	—	—	—	—	—
6	D4	750	20	1.465	—	S328YA
7	D6	1860	8	4.680	—	S328YA
8	D4	120	8	0.695	—	S328YA
9	D4	120	8	0.695	—	S328YA
10	D4	225	4	0.695	—	S328YA
11	D10	1860	2	2.683	—	S328YA
計				22.190		
製品重量			823	kg		

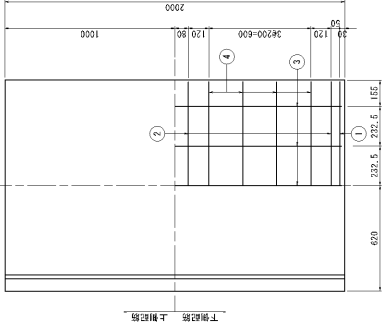


下側配筋 上側配筋


側面図

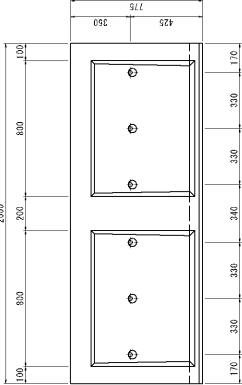

断面図





側面図

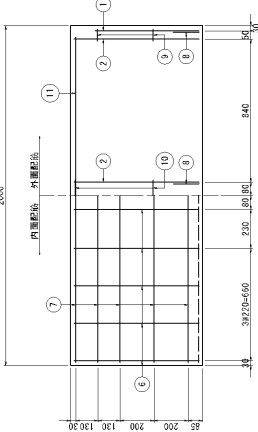



ワイドフレーム H700xB1200

鉄筋加工図

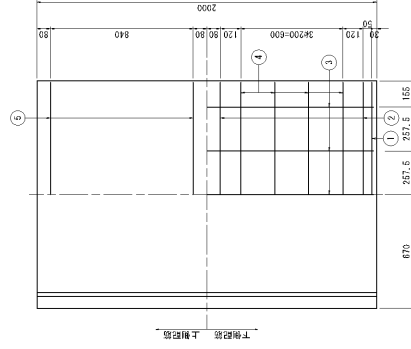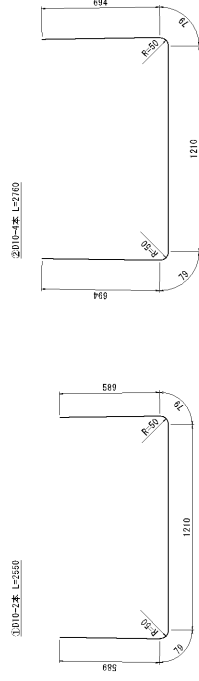


材料表 (一本当り)


類別No	座号	本数	重量 (kg)	形状	材質	
鐵	1	010	2550	2	2,856	532414
	2	010	2160	4	6,182	532414
	3	06	1960	5	2,440	532414
	4	06	1220	8	2,272	532414
	5	06	1220	4	1,315	532414
	6	54	750	20	1,485	532414
	7	06	1660	10	4,660	532414
	8	10	220	8	0,988	532414
	9	54	120	8	0,095	532414
	10	54	225	4	0,689	532414
	11	010	1660	2	2,083	532414
座	計				25,040	

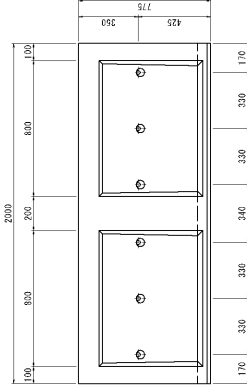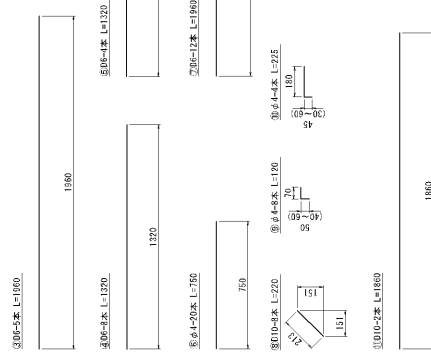

断面図

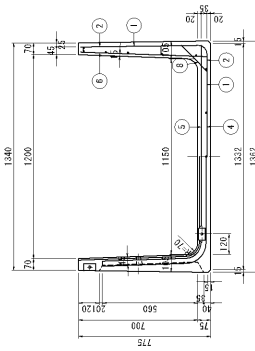


侧面图

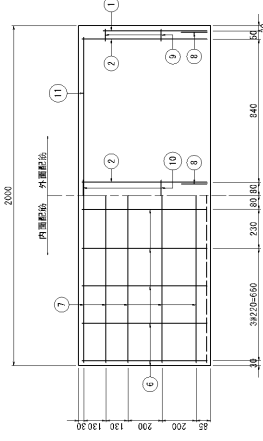

ワイドフレーム H700xB1400

2-115


鉄筋加工図

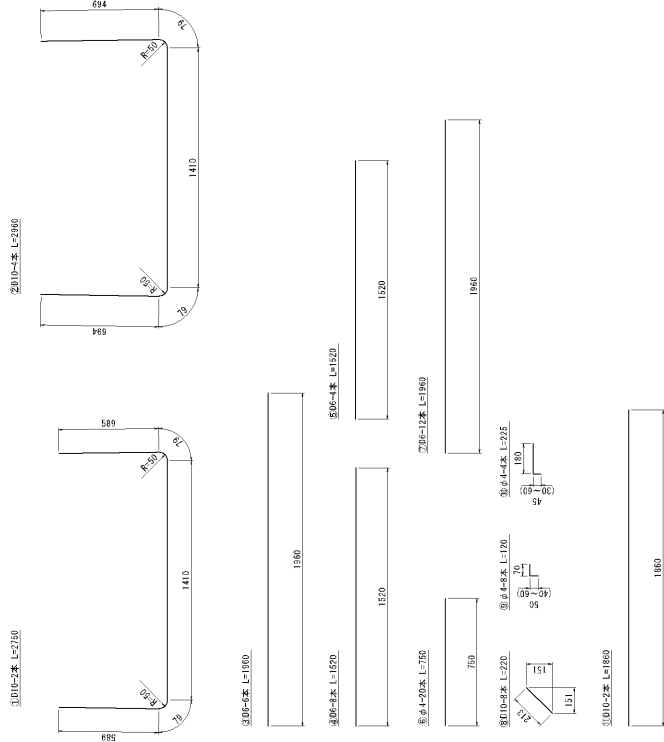


材料表 (一本当り)

種別No	径 (mm)	本数	長さ (mm)	重量 (kg)	形状	材質
1	D10	2	2750	3.060	—	S328YA
2	D10	2	2950	3.240	—	S328YA
3	D10	2	1570	1.630	—	S328YA
4	D10	2	1520	1.570	—	S328YA
5	D10	2	1520	1.570	—	S328YA
6	D10	2	1520	1.570	—	S328YA
7	D10	2	1520	1.570	—	S328YA
8	D10	2	1520	1.570	—	S328YA
9	D10	2	1520	1.570	—	S328YA
10	D10	2	1520	1.570	—	S328YA
11	D10	2	1520	1.570	—	S328YA
計				25.783		
製品重量				938 kg		


側面図

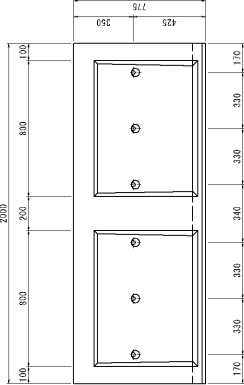

断面図

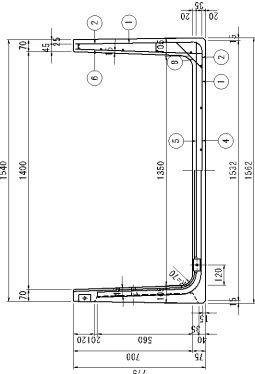

側面図

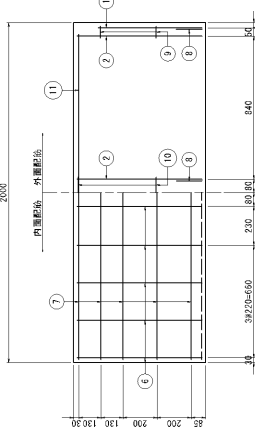


ワイドフリーム H800xB500

2-1 15


材料表 (一本当り)

種別	No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
鉄	1	D13	1900	2	3.781	53HSLA
	2	D13	2220	4	8.836	53HSLA
	3	D6	1900	3	1.464	53HSLA
	4	D6	650	8	1.295	53HSLA
	5	-	-	-	-	-
鉄	6	φ4	640	20	1.663	53HSLA
	7	D6	1900	10	4.880	53HSLA
	8	D10	220	8	0.396	53HSLA
	9	φ4	120	12	0.143	53HSLA
	10	φ4	230	6	0.137	53HSLA
防	11	D10	1660	2	2.083	53HSLA
計				25.268		
製品重量				731 kg		


平面図

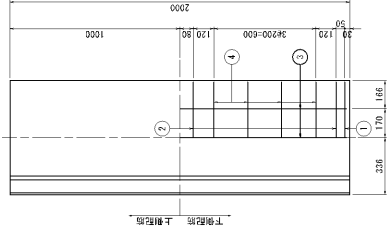


鉄筋加工図

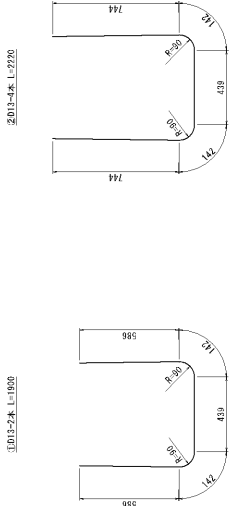


側面図

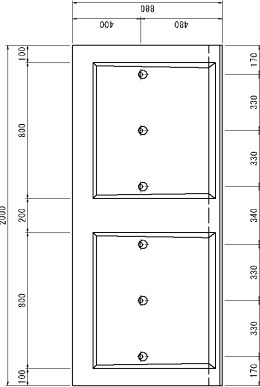

断面図



側面図

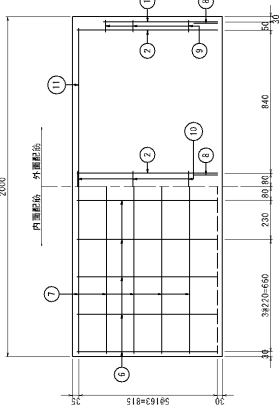


ワイドフレーム H800xB600

$$S=1:15$$


材料表 (一本当り)

類別	N	0	徑	mm	七 字	本 數	量 mm	形 狀	材 質
鐵	1	103	2000	2	3,950			U	S34754
	2	103	2320	4	9,234			U	S34754
	3	106	1650	3	1,654			—	S34754
	4	106	750	8	1,654			—	S34754
	5	—	—	—	—			—	—
	6	64	640	20	1,652			—	S34754
	7	106	1650	10	4,590			—	S34754
	8	103	220	8	850			—	S34754
	9	64	120	12	0,142			—	S34754
	10	64	230	6	0,321			—	S34754
鋁	11	103	1660	2	2,083			—	S34754
	註					26,054			
單位					750	kg			


平面图

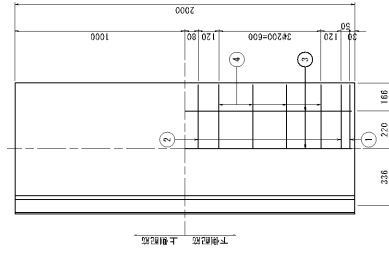


側面図

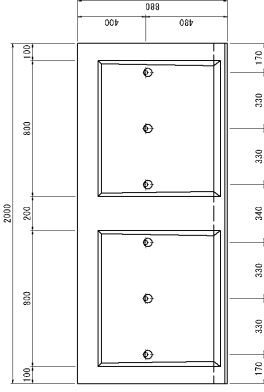


断面図




側面図

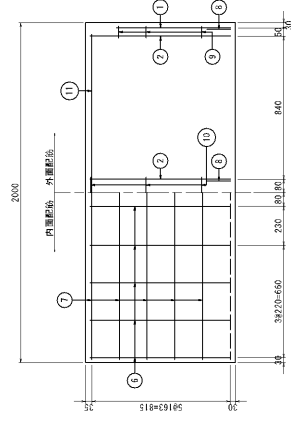

鐵筋加工圖

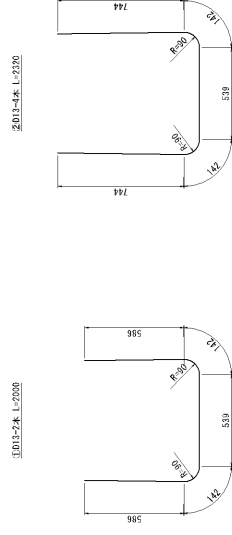




ワイドフリーム H800xB700

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2100	2	—	53HSLA
2	D13	2420	4	—	53HSLA
3	D6	1660	3	—	53HSLA
4	D6	650	8	—	53HSLA
5	—	—	—	—	—
6	φ4	640	20	—	53HSLA
7	D6	1660	10	—	53HSLA
8	D10	220	8	—	53HSLA
9	φ4	120	12	—	53HSLA
10	φ4	230	6	—	53HSLA
11	D10	1660	2	—	53HSLA
計					
計点数量			26.860		


平面図

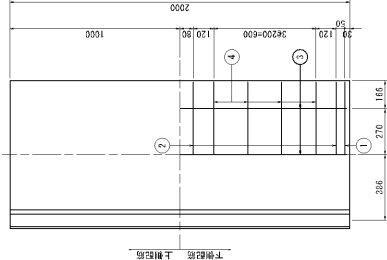


鉄筋加工図

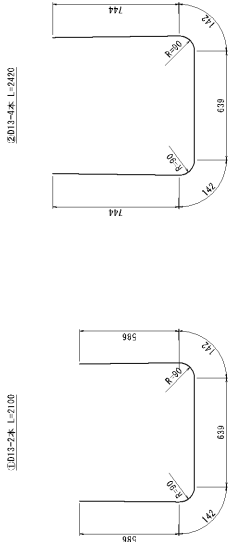


前面図

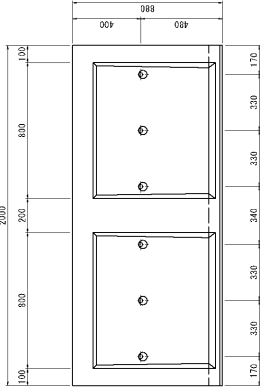

断面図



側面図

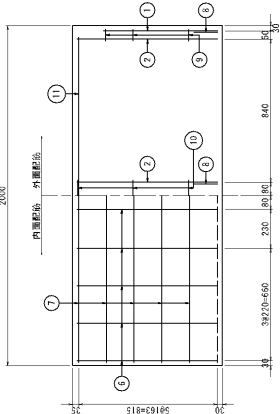


ワイドフリーム H800xB800

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2200	2	—	53HSLA
2	D13	2520	4	—	53HSLA
3	D6	1660	4	—	53HSLA
4	D6	650	8	—	53HSLA
5	—	—	—	—	—
6	φ4	640	20	—	53HSLA
7	D6	1660	10	—	53HSLA
8	D10	220	8	—	53HSLA
9	φ4	120	12	—	53HSLA
10	φ4	230	6	—	53HSLA
11	D10	1660	2	—	53HSLA
計			28.144		
部品数量		844 kg			


平面図

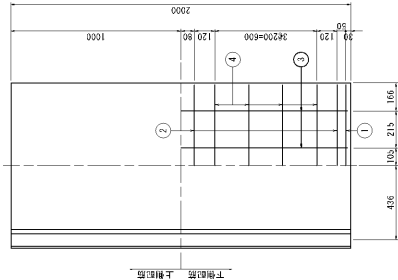


鉄筋加工図

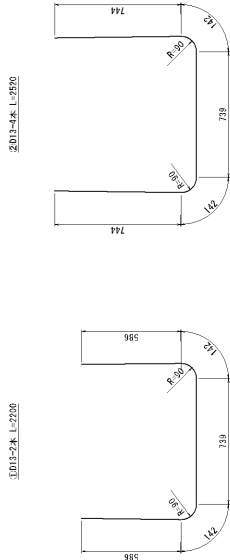


側面図

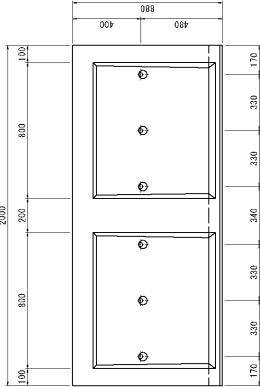

断面図









側面図

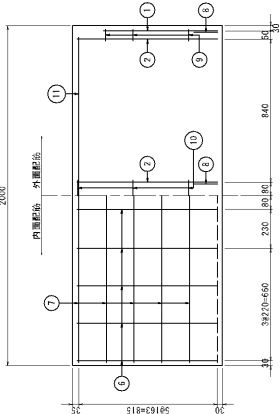

ワイドフレーム H800xB900

515

材 料 表 (一本当り)						
種類	N O 座	重 量 (g)	本 数	重 量 (kg)	材 質	
鉄	1	103	2000	2	4.577	SJ242X
	2	103	2620	4	10.428	SJ242X
	3	106	1660	4	1.852	SJ242X
	4	106	1050	8	2.092	SJ242X
	5	—	—	—	—	—
	6	64	640	20	1.663	SJ1914X
	7	86	1660	10	4.680	SJ1914X
	8	100	720	6	0.899	SJ1914X
	9	64	720	12	0.899	SJ1914X
	10	140	230	6	0.537	SJ1914X
鋳	11	100	1660	2	2.083	SJ1914X
	計				28.941	
計			822	86		

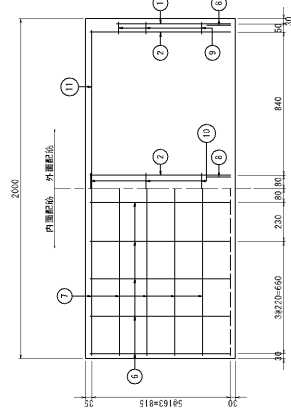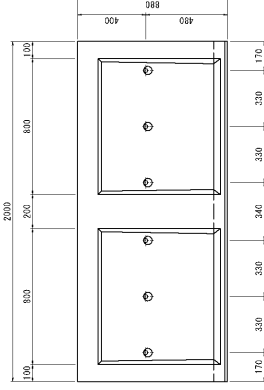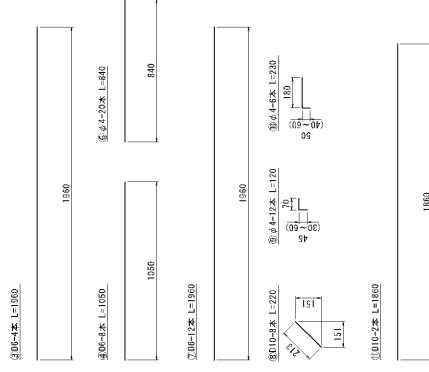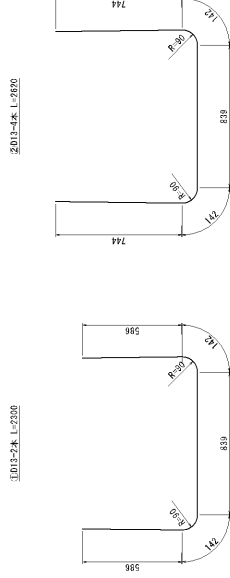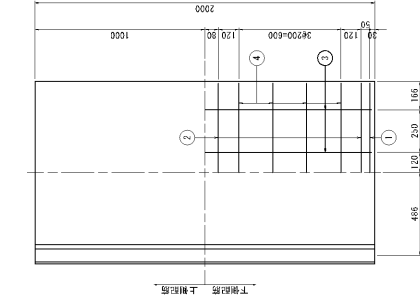


ワイドフレーム H800xB1000

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2400	2	U	S315A
2	D13	2720	4	U	S315A
3	D6	1660	4	—	S315A
4	D6	1150	8	—	S315A
5	—	—	—	—	—
6	φ4	640	20	—	S315A
7	D6	1660	10	—	S315A
8	D10	2720	8	—	S315A
9	φ4	120	12	—	S315A
10	φ4	230	6	—	S315A
11	D10	1660	2	—	S315A
計			28.737		
部品数量				919 kg	


平面図

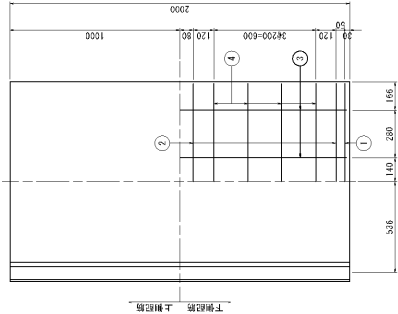


鉄筋加工図

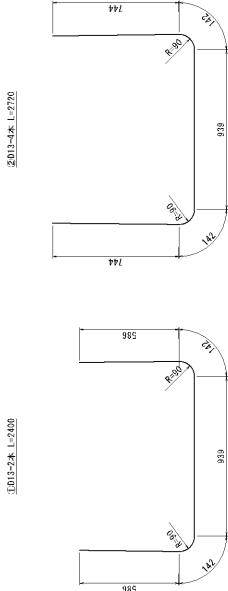


側面図

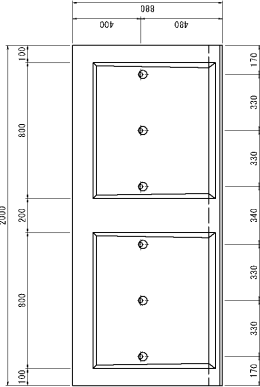

断面図



側面図

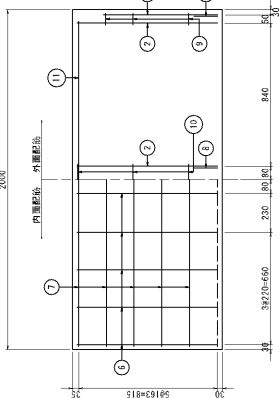


ワイドフレーム H800xB1100

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2500	2	—	S315A
2	D13	2820	4	—	S315A
3	D6	1660	5	—	S315A
4	D6	1250	8	—	S315A
5	—	—	—	—	—
6	φ4	640	20	—	S315A
7	D6	1660	10	—	S315A
8	D10	220	8	—	S315A
9	φ4	120	12	—	S315A
10	φ4	230	6	—	S315A
11	D10	1660	2	—	S315A
計			31.021		
部品数量		957 kg			


平面図

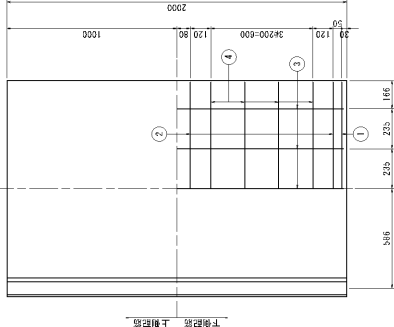


側面図

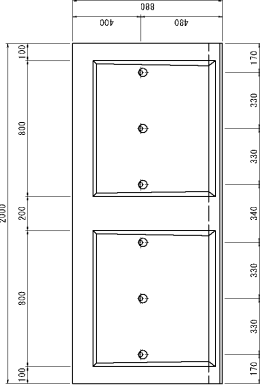


断面図



側面図

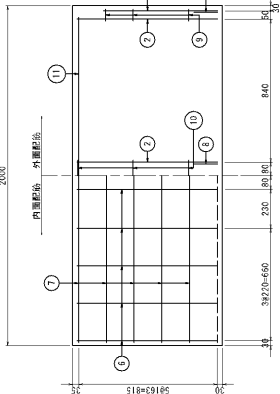

鉄筋加工図

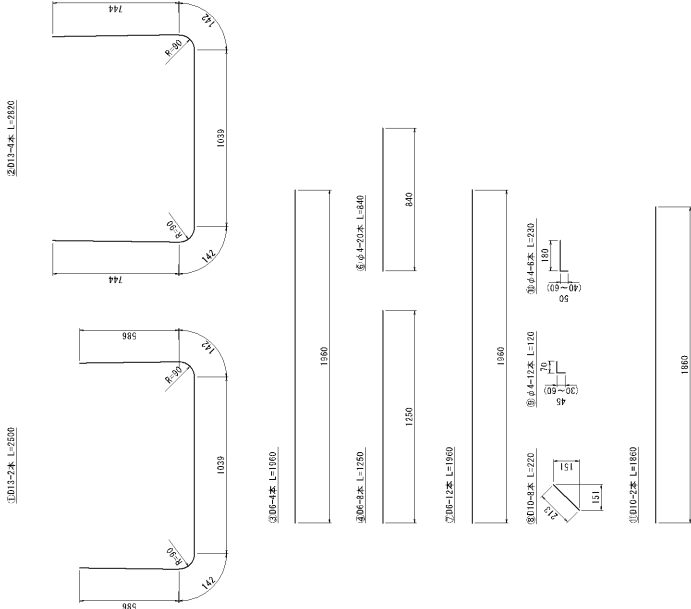


ワイドフレーム H800xB1200

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2600	2	—	S355A
2	D13	2020	4	—	S355A
3	D6	1660	5	—	S355A
4	D6	1350	8	—	S355A
5	—	—	—	—	—
6	φ4	640	20	—	S355A
7	D6	1660	10	—	S355A
8	D10	220	8	—	S355A
9	φ4	120	12	—	S355A
10	φ4	230	6	—	S355A
11	D10	1660	2	—	S355A
計					
計			31.817		
部品数量		934 kg			

平面図

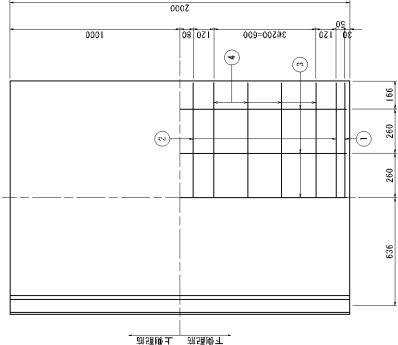

鋳造加工図

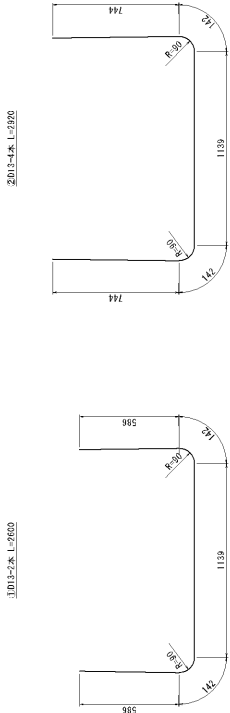

①D13-2本 L=1660



2004-20本 L=840




②D10-2本 L=1660




③D10-2本 L=220




④D10-2本 L=1660




側面図

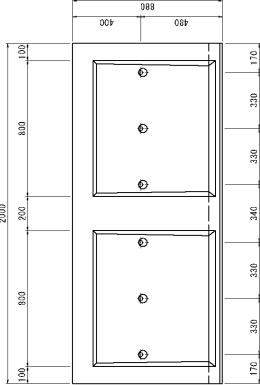

断面図

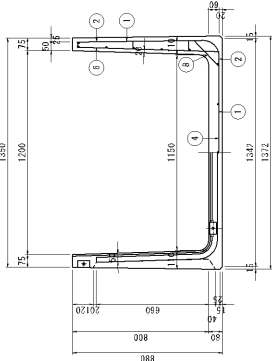

側面図



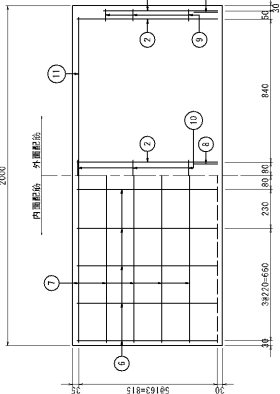


ワイドフレーム H800xB1300


5115

材料表 (一本当り)	種類	№	座	室	本数	重量 (kg)	形状	材質
鉄	1	103	700	2	5,373	—	□	S345JX
	2	103	5050	4	12,000	—	—	S345JX
	3	96	1460	5	2,400	—	—	S345JX
	4	96	1450	8	2,688	—	—	S345JX
	5	96	1450	4	1,444	—	—	S205JX
	6	94	1440	20	1,603	—	—	S345JX
	7	96	1460	10	4,680	—	—	S345JX
	8	90	720	9	0,899	—	—	S345JX
	9	94	1430	12	0,717	—	—	S345JX
	10	144	230	5	5,337	—	—	S345JX
板	11	100	1660	2	2,683	—	—	S345JX
	計							
材料重量					103.2	kg		


材料表 (一本当り)

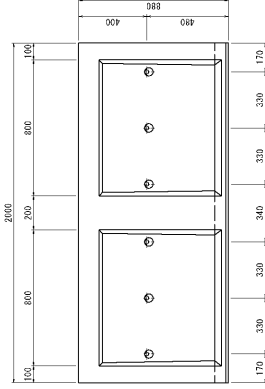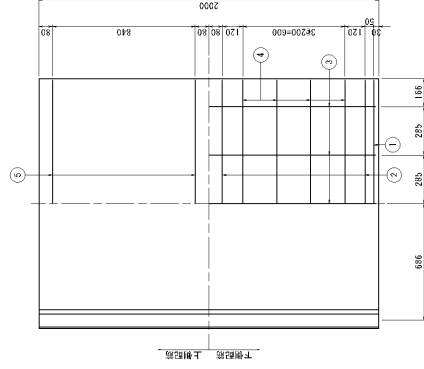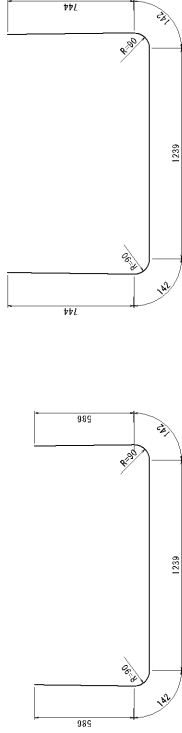

断面図

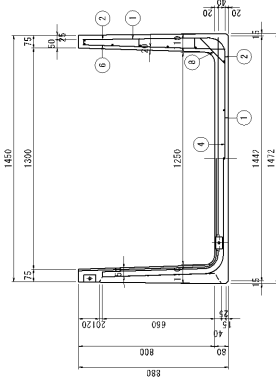








侧面图

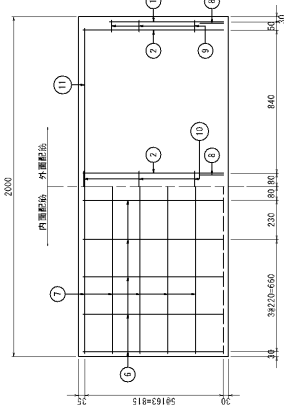

ワイドフレーム H800xB1400

5115

材 料 表 (一本当り)							
種類	N	径	本数 (個)	質量 (kg)	防 錆	材 質	
鉄	1	103	2000	2	5.572	—	3031314
	2	103	3720	4	12.418	—	3031314
	3	106	1960	6	2.258	—	3031314
	4	106	1960	5	3.068	—	3031314
	5	106	1960	4	1.344	—	3025514
	6	104	940	20	1.450	—	3031314
銅	7	105	1960	10	4.690	—	3031314
	8	100	720	6	0.890	—	3031314
	9	94	720	12	0.160	—	3031314
	10	94	720	6	0.157	—	3031314
鉛	11	100	1660	2	2.063	—	3031314
	計				35.442		
質量			1070	kg			

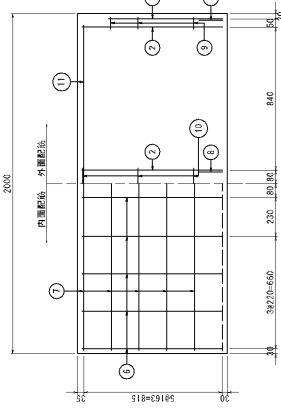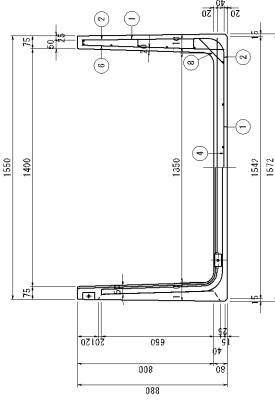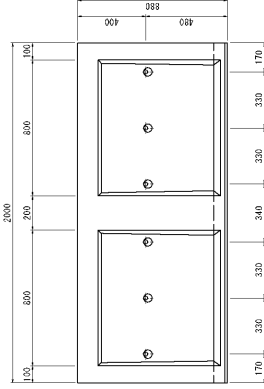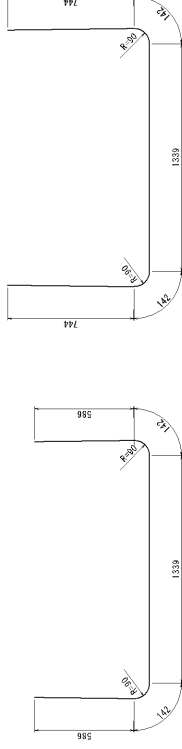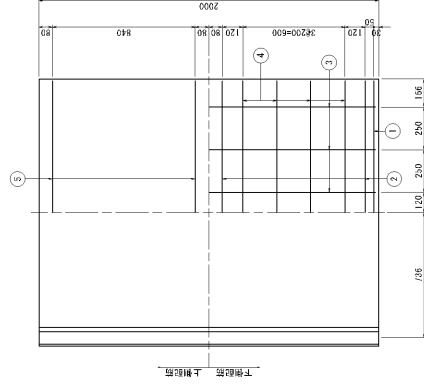


ワイドフレーム H800xB1500

$$S=1:15$$


材料表 (一本当り)

類別 No	徑	厚	七 本	厚 量	狀	材
1	013	2900	2	5,771	—	332154
2	013	3220	4	12,515	—	332154
3	05	1980	6	2,228	—	332154
4	05	1650	8	3,357	—	332154
5	05	1650	4	1,543	—	332154
6	54	940	20	1,652	—	302554
7	05	1980	10	4,590	—	332154
8	010	220	8	6,595	—	332154
9	54	120	12	4,142	—	332154
10	54	220	6	0,137	—	332154
11	010	1980	2	2,083	—	332154
計				35,327		
總計				1107	kg	


平面图

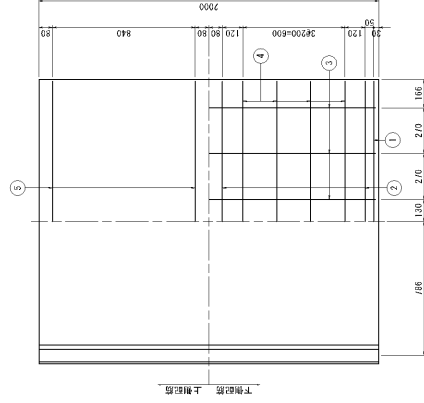


側面図

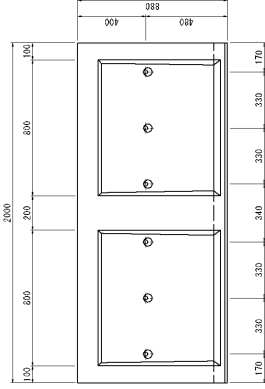


断面図

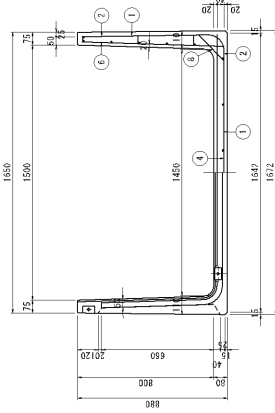


側面図

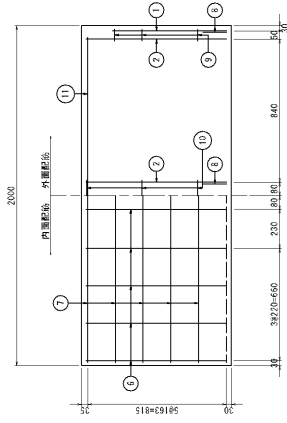

鉄筋加工図

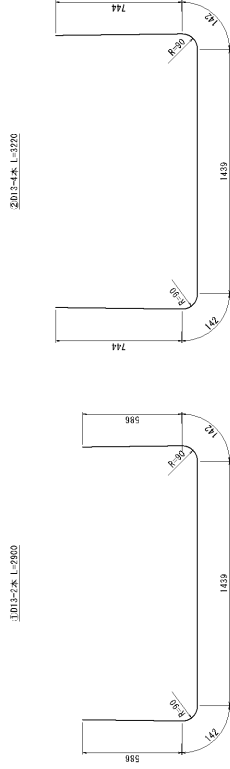

306-6本 L-1960

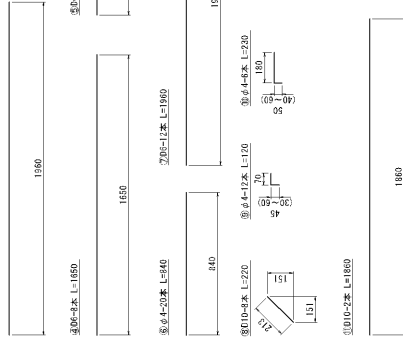


ワイドフレーム H800xB1600

2-1 15


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D13	3000	2	5.970	┐	SUS304
2	D13	3320	4	13.214	┐	SUS304
3	D6	1980	6	2.928	┐	SUS304
4	D6	1750	8	3.466	┐	SUS304
5	D6	1750	4	1.743	┐	SUS304
6	φ4	940	20	1.663	┐	SUS304
7	D6	1980	10	4.880	┐	SUS304
8	D10	220	8	0.666	┐	SUS304
9	φ4	120	12	0.143	┐	SUS304
10	φ4	230	6	0.137	┐	SUS304
11	D10	1980	2	2.083	┐	SUS304
計				37.233		
重量				1145	kg	


平面図

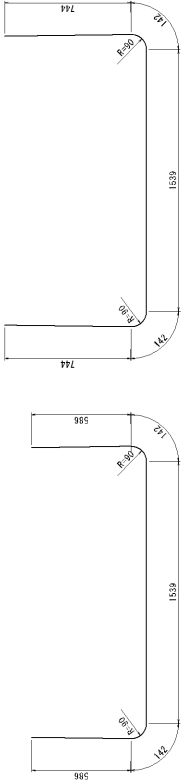


下側起吊 上側起吊

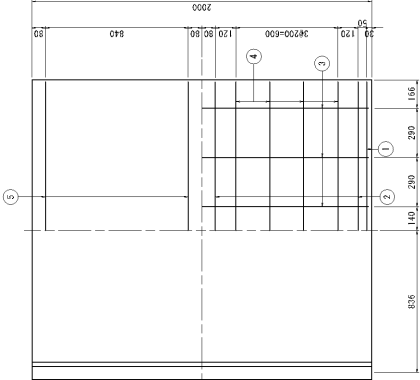


側面図

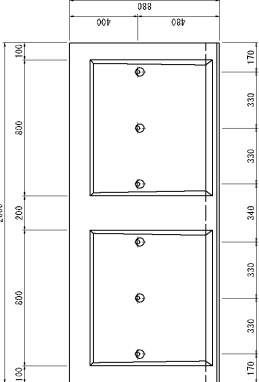

断面図

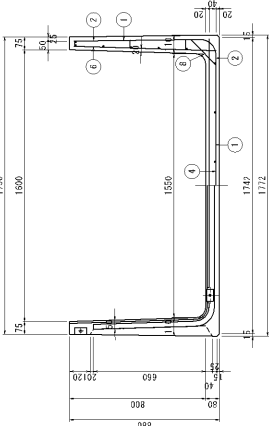

側面図

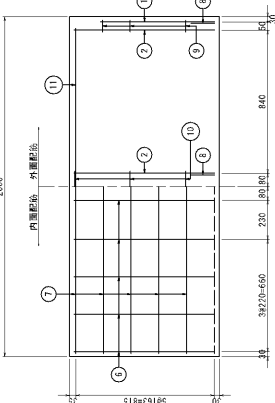

鋳造加工図

①D13-2本 L=3000 ②D13-4本 L=3320


ワイドフレーム H900xB500

515


材料表 (一本当り)

標別	N ₀	徑 φ(mm)	七 本 數	量 重 (kg)	沙 材 質	
鐵	1	Φ13	2100	2	4,179	539F5A
	2	Φ13	2450	4	9,251	539F5A
	3	Φ6	1660	3	1,664	539F5A
	4	Φ6	660	8	1,315	539F5A
	5	—	—	—	—	539F5A
	6	Φ4	940	20	1,861	539F5A
鋼	7	Φ6	1660	12	5,656	5320F4
	8	Φ10	2660	8	1,165	5320F4
	9	Φ4	1380	12	0,154	5320F4
	10	Φ4	230	6	0,137	5320F4
	11	Φ10	1660	2	2,083	5320F4
	12	—	—	—	—	5320F4
標	注	—	—	27,965	—	
計	—	910	86	—	—	


平面图

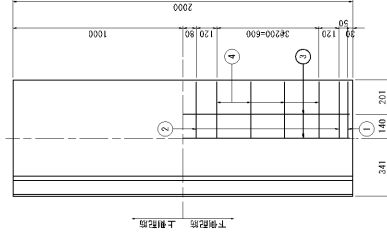


鉄筋加工図

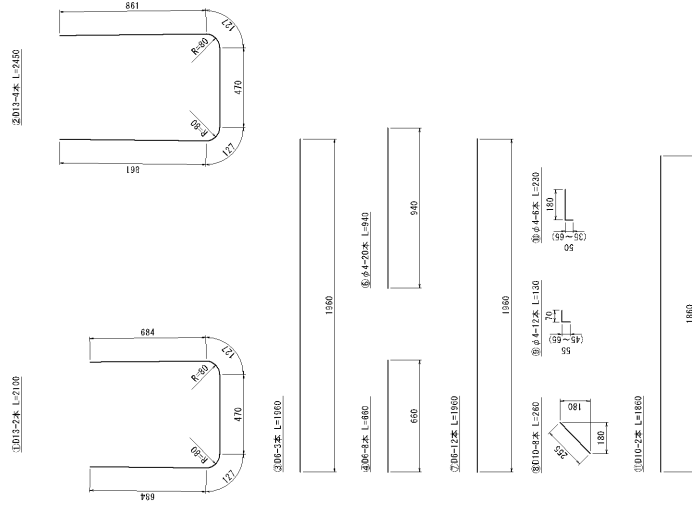


側面図

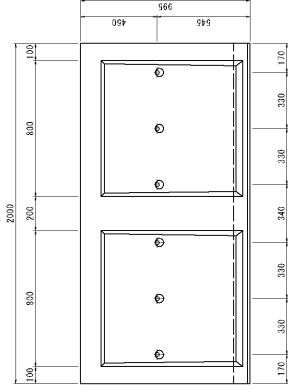

断面図



侧面图

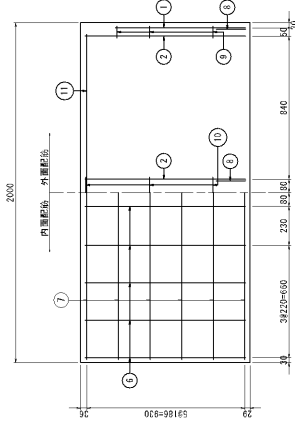


ワイドフレーム H900xB600

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2200	2	U	S315FA
2	D13	2550	4	U	S315FA
3	D6	1660	3	—	S315FA
4	D6	760	8	—	S315FA
5	—	—	—	—	—
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			28.791		
部品数量		954 kg			


平面図

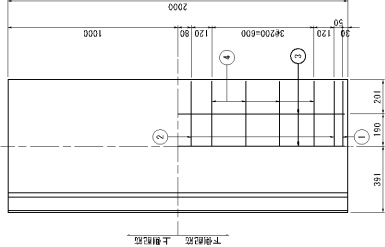


鉄筋加工図

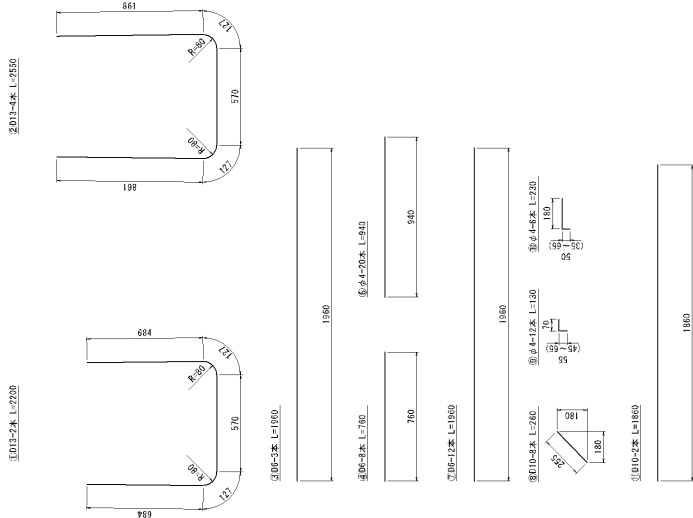

側面図

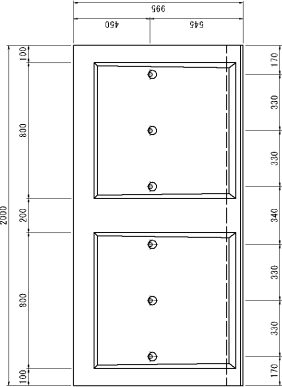

側面図

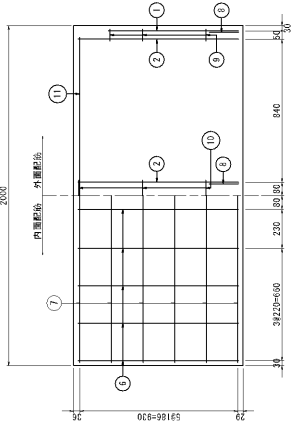


ワイドフレーム H900xB700

$$S=1:15$$


材料表 (一本当り)

標別No	径	七 本 長 (mm)	七 本 量 (kg)	沙	材
1	D13	2300	2, 537	—	33945A
2	D13	2650	4, 054 ¹⁾	—	33945A
3	D6	1660	3, 184	—	33945A
4	D6	660	1, 713	—	33945A
5	—	—	—	—	33945A
6	φ 44	440	2, 181	—	33945A
7	D6	1660	12, 556	—	33241A
8	D10	260	8, 165	—	33241A
9	φ 44	130	12, 034	—	33241A
10	φ 44	260	9, 537	—	33943A
11	D10	1660	2, 263	—	33943A
計			78, 557		
単位質量	999	kg			


圖 恒斗

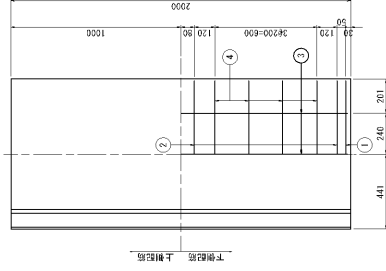


側面図

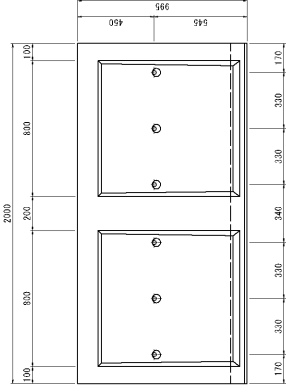


断面図



側面図

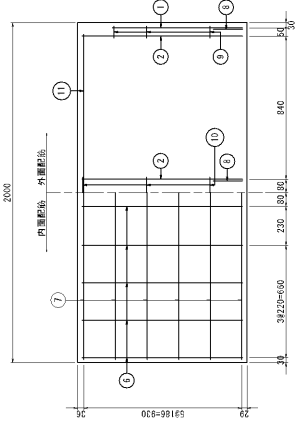

鐵筋加工圖





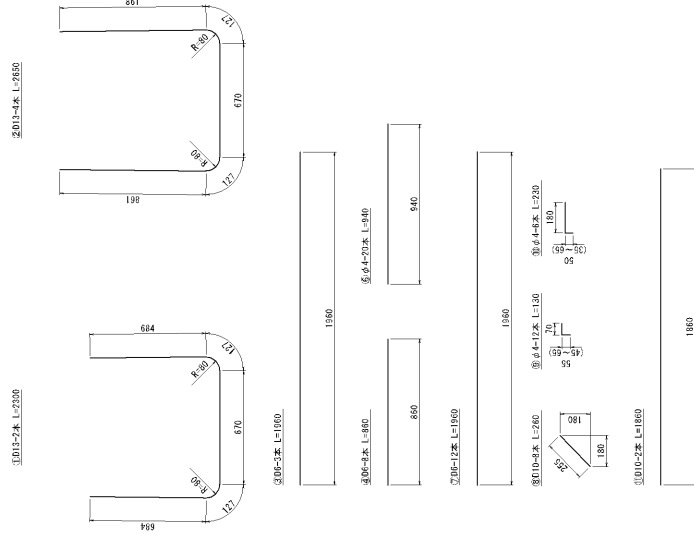


ワイドフレーム H900xB1100

$$S=1:15$$

材料表 (一本当り)

類別	N	0	徑	mm	七 字	本 數	量 (kg)	形	材	質
鐵	1	013	700	2	5,713	—	—	—	53945A	53945A
	2	012	3050	4	12,139	—	—	—	53945A	53945A
	3	06	1660	5	2,460	—	—	—	53945A	53945A
	4	06	1660	8	2,510	—	—	—	53945A	53945A
	5	—	—	—	—	—	—	—	53945A	53945A
	6	04	640	20	1,861	—	—	—	53945A	53945A
	7	06	1660	12	5,656	—	—	—	53945A	53945A
	8	010	2600	8	1,055	—	—	—	53945A	53945A
	9	04	1300	12	0,154	—	—	—	53945A	53945A
	10	041	230	6	0,327	—	—	—	53945A	53945A
松	11	010	1660	2	2,083	—	—	—	53945A	53945A
	註	—	—	—	—	—	33,718	—	—	—
合計	—	—	—	—	1177	kg	—	—	—	—

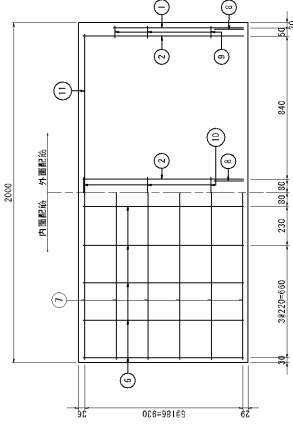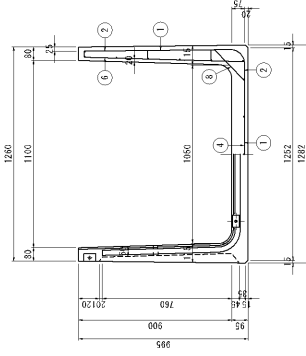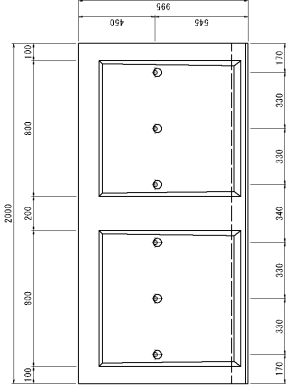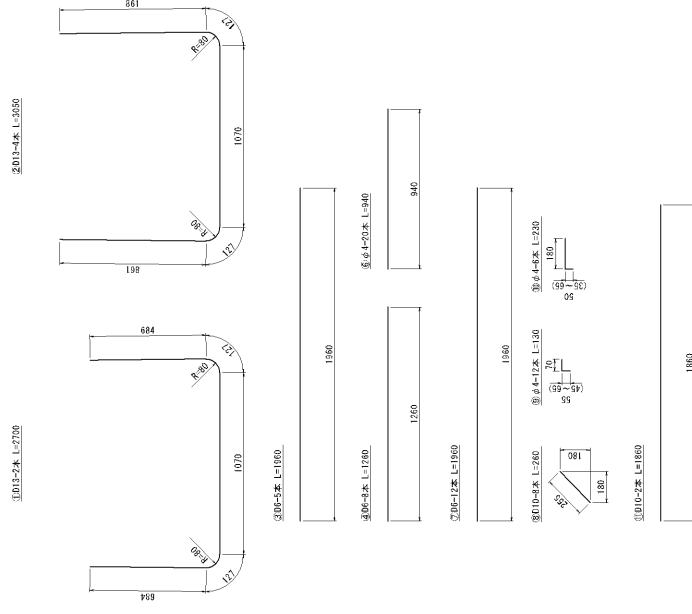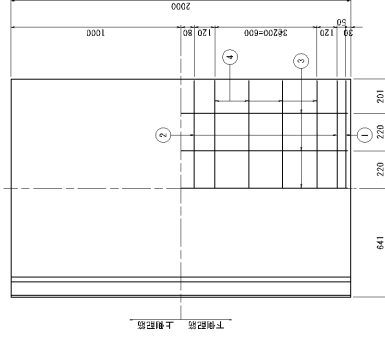


ワイドフレーム H900xB1200

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2800	2	U	53HSA
2	D13	3150	4	U	53HSA
3	D6	1660	5	—	53HSA
4	D6	1300	8	—	53HSA
5	—	—	—	—	—
6	φ4	640	20	—	53HSA
7	D6	1660	12	—	53HSA
8	D10	260	8	—	53HSA
9	φ4	130	12	—	53HSA
10	φ4	230	6	—	53HSA
11	D10	1660	2	—	53HSA
計			34.514		
製品重量			1222 kg		


平面図

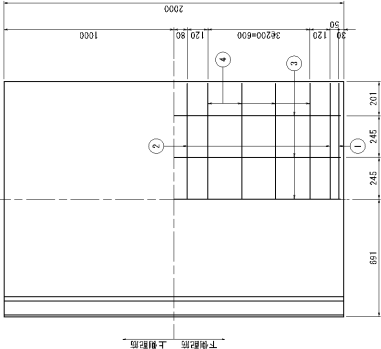


鉄筋加工図

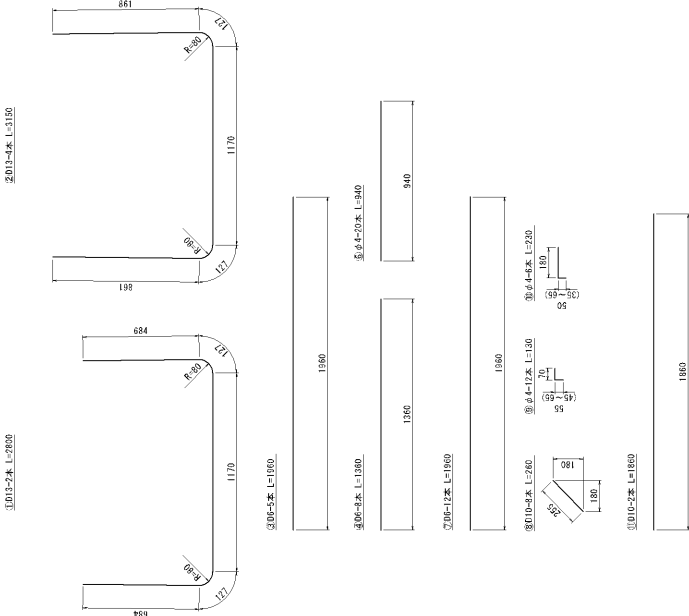


側面図

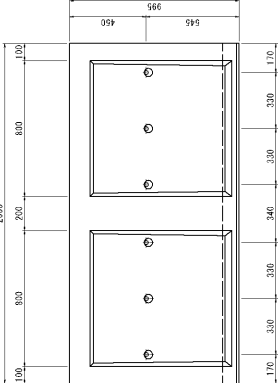

断面図

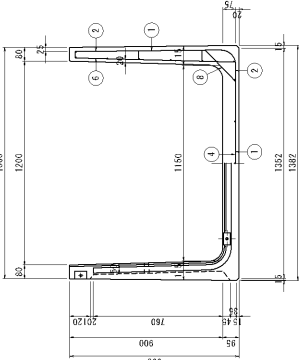

側面図

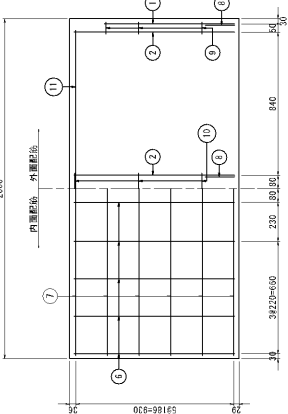


ワイドフレーム H900xB1300

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (本)	重量 (kg)	形状	材質
1	D13	2500	2	5.771	U	S315FA
2	D13	3250	4	12.935	U	S315FA
3	D6	1660	5	2.440	—	S315FA
4	D6	1460	8	2.906	—	S315FA
5	—	—	—	—	—	—
6	φ4	640	20	1.861	—	S315FA
7	D6	1660	12	5.856	—	S315FA
8	D10	260	8	1.165	—	S315FA
9	φ4	130	12	0.154	—	S315FA
10	φ4	230	6	0.137	—	S315FA
11	D10	1660	2	2.083	—	S315FA
鉄						
粘						
計				35.310		
製品重量				1257 kg		


平面図

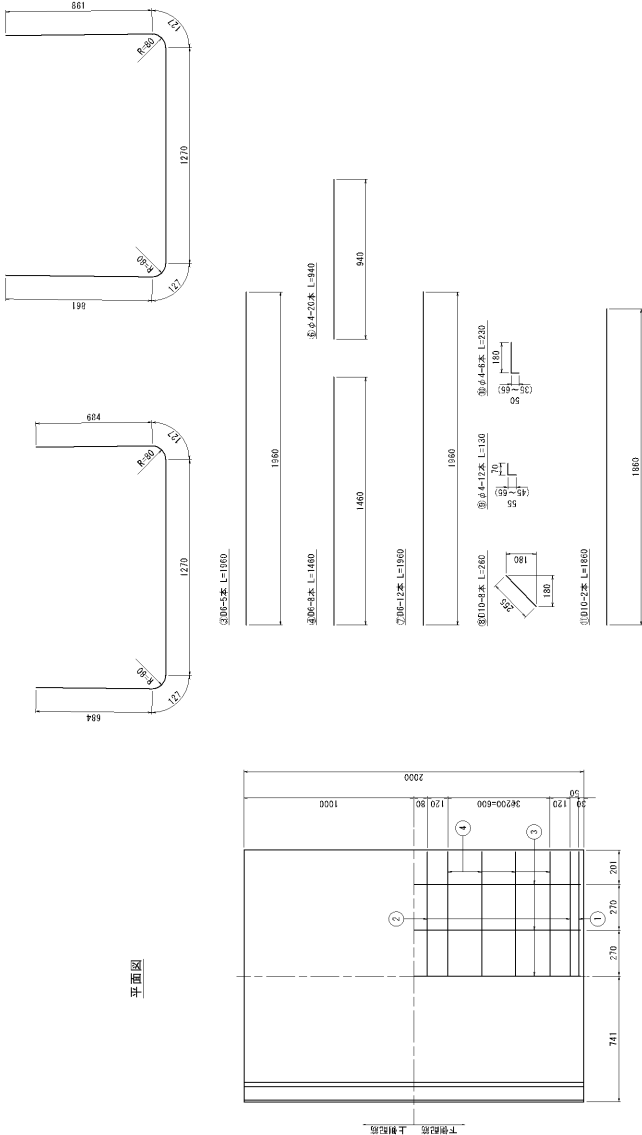


側面図

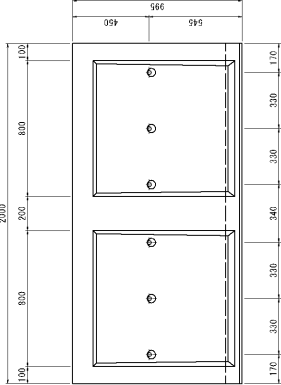


断面図

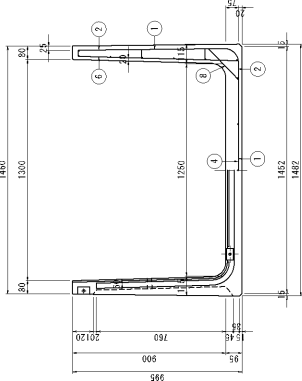

側面図

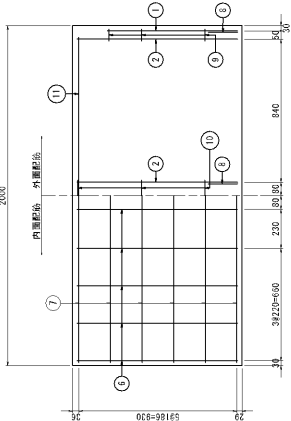

鉄筋加工図

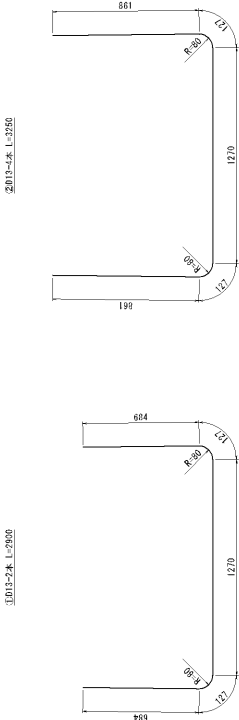


ワイドフレーム H900xB1400

$$S=1:15$$


材料表 (一本当り)

類別	N	徑	厚	七	本	狀	材
				量	數	料	質
				(mm)	(個)		
1	D13	3000	2	5,370	—	—	53745A
2	D12	3350	4	12,323	—	—	53745A
3	D6	1660	6	2,262	—	—	53745A
4	D6	1660	8	3,108	—	—	53745A
5	—	—	—	—	—	—	53745A
6	6.4	640	20	1,861	—	—	53745A
7	D6	1660	12	5,656	—	—	53745A
8	D10	2600	8	1,165	—	—	53745A
9	6.4	1380	12	6,154	—	—	53745A
10	6.4	2300	6	0,327	—	—	53745A
11	D10	1660	2	2,083	—	—	53745A
註					36,595		
單位				kg	1311		


平面图

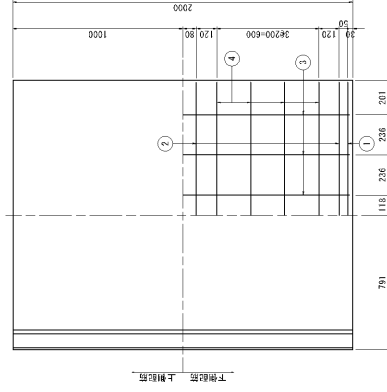


側面図

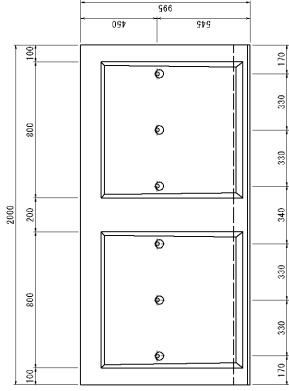


断面図

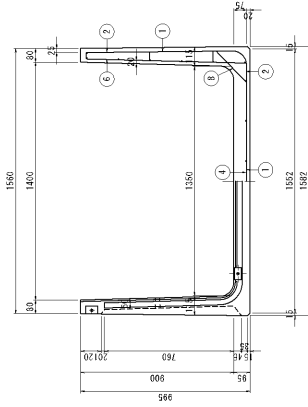

侧面图

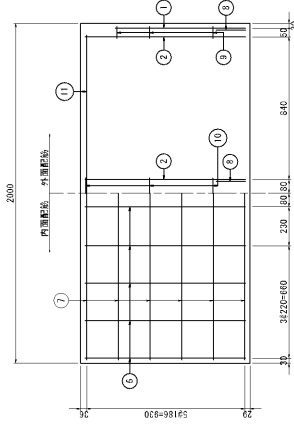

鉄筋加工図

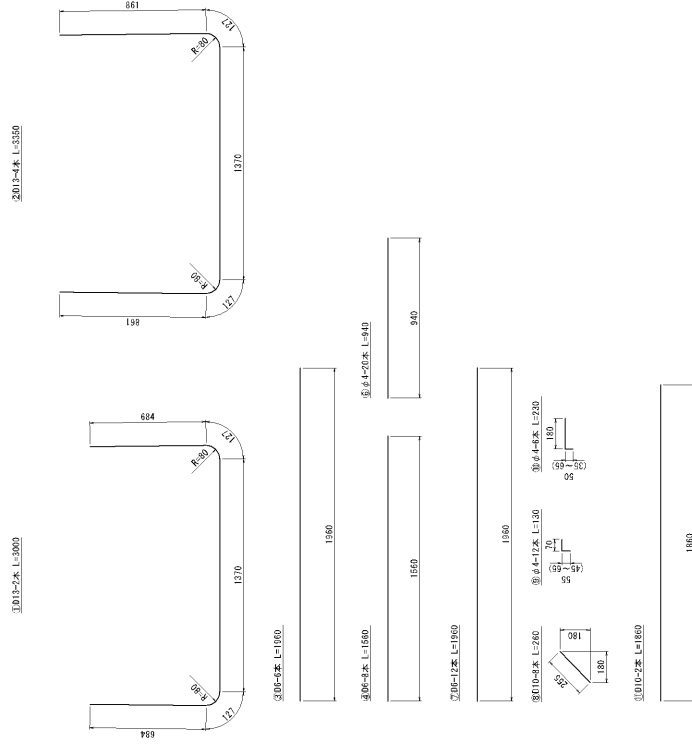


ワイドフレーム H900xB1500

2-1 15


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	3100	2	U	53HSLA
2	D13	3450	4	U	53HSLA
3	D6	1660	6	—	53HSLA
4	D6	1600	8	—	53HSLA
5	—	—	—	—	—
6	φ4	640	20	—	53HSLA
7	D6	1660	12	—	53HSLA
8	D10	260	8	—	53HSLA
9	φ4	130	12	—	53HSLA
10	φ4	230	6	—	53HSLA
11	D10	1660	2	—	53HSLA
計			37.391		
製品重量			1356 kg		


平面図

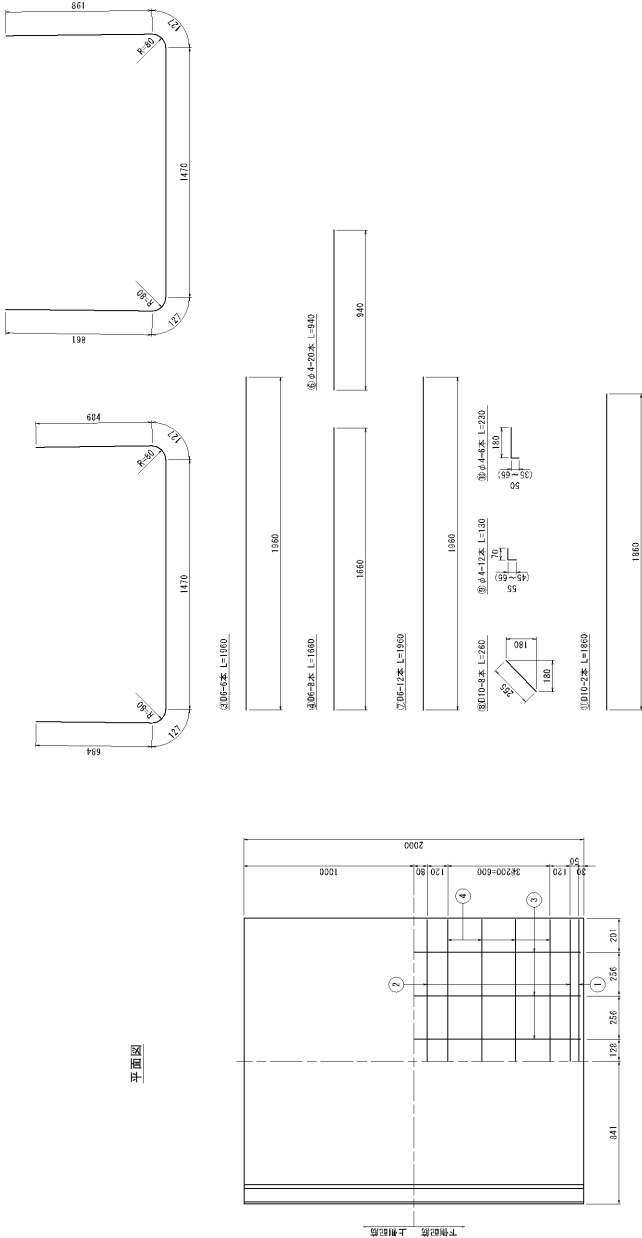


側面図

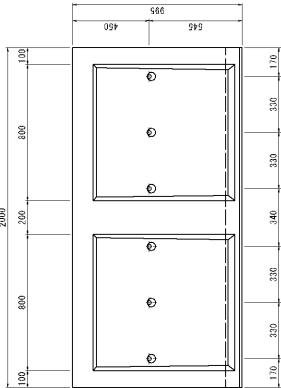

断面図

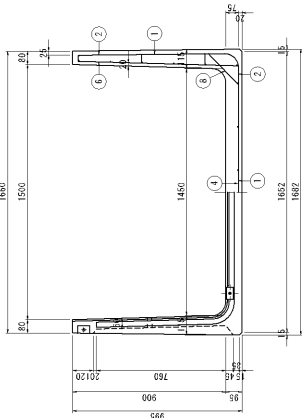


側面図

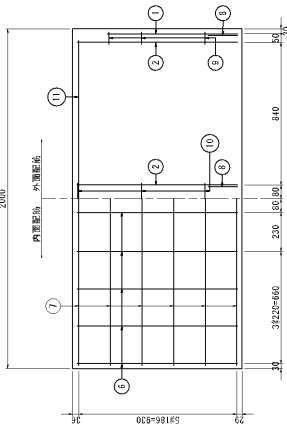


鉄筋加工図


①D13-2本 L=3100




②D6-4本 L=1660



③D6-4本 L=940



④D6-12本 L=1660



⑤D10-2本 L=260



⑥D6-4本 L=230



⑦D10-2本 L=1660




ワイドフレーム H900xB1600

2-1 15

材料表 (一本当り)


種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	3200	2	U	53H15A
2	D13	3550	4	U	53H15A
3	D6	1660	6	—	53H15A
4	D6	1700	8	—	53H15A
5	D6	1700	4	—	SP2050A
6	φ4	640	20	—	53H15A
7	D6	1660	12	—	53H15A
8	D10	260	8	—	53H15A
9	φ4	130	12	—	53H15A
10	φ4	230	6	—	53H15A
11	D10	1660	2	—	53H15A
計			38.940		
製品重量			1401 kg		

平面図

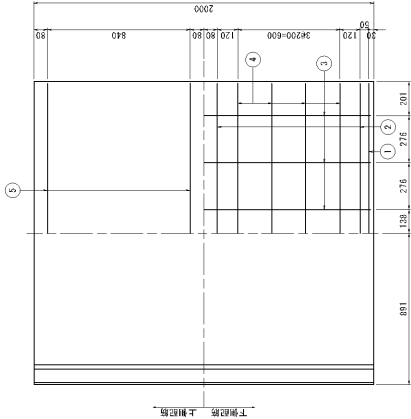


下側起吊 上側起吊


鉄筋加工図

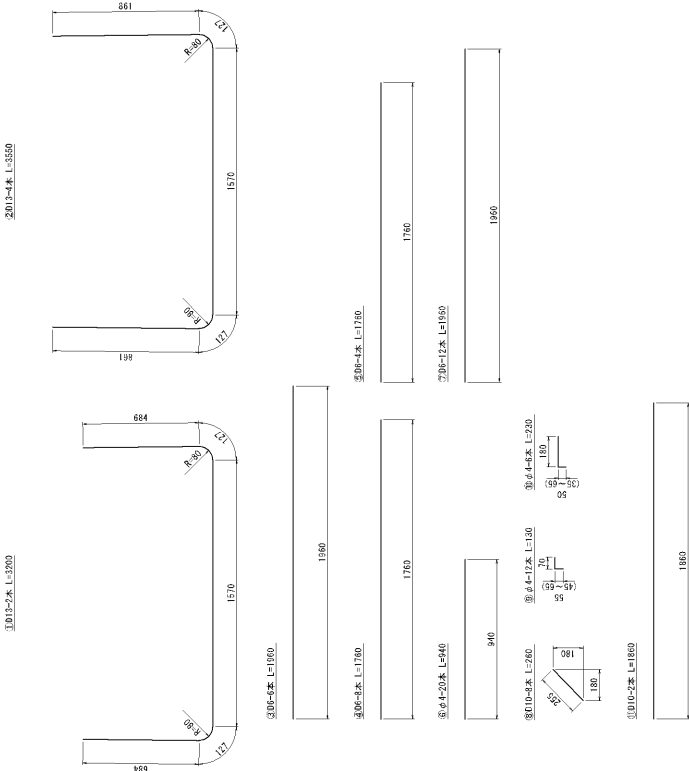


側面図

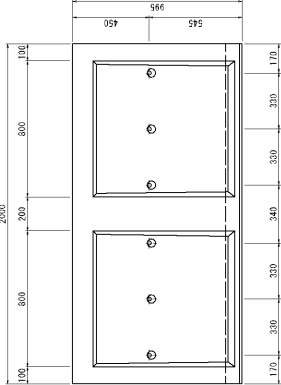

断面図

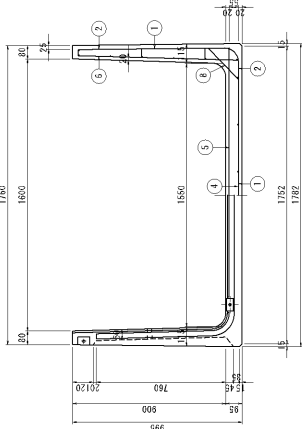

側面図

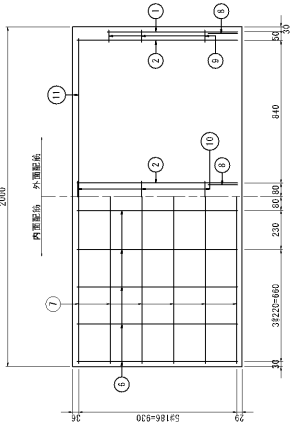


ワイドフレーム H900xB1700

2-1 15

材料表 (一本当り)


種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	3300	2	U	S315FA
2	D13	3850	4	U	S315FA
3	D6	1660	7	—	S315FA
4	D6	1660	8	—	S315FA
5	D6	1660	4	—	S2205FA
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			41.324		
部品重量			1445 kg		

平面図

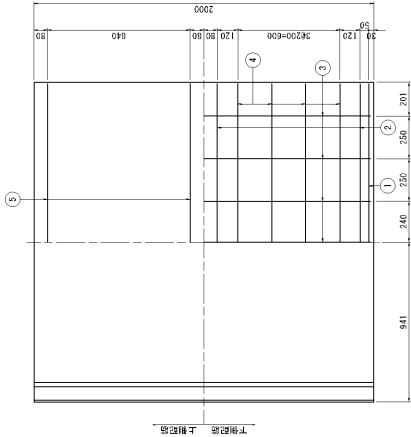


下側記号 上側記号


鉄筋加工図

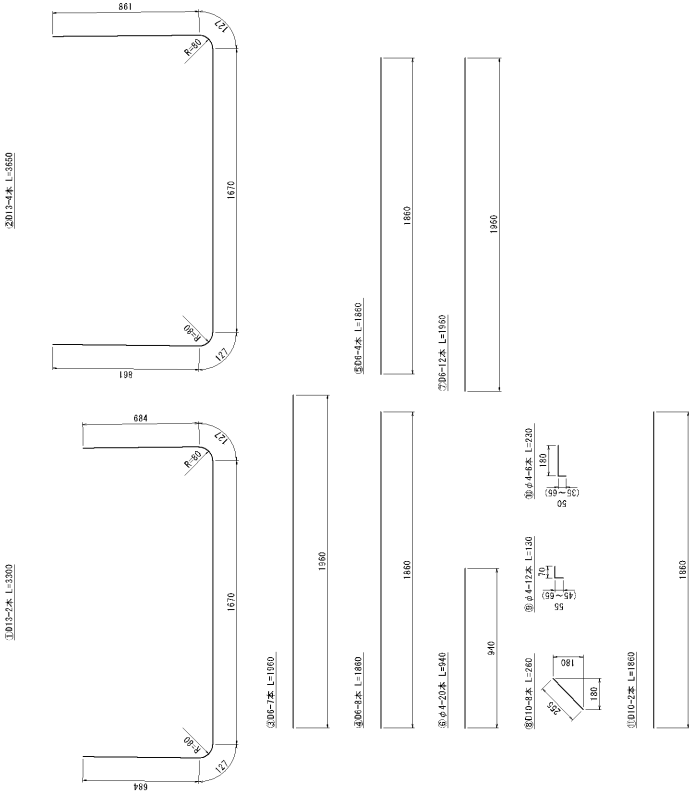

側面図

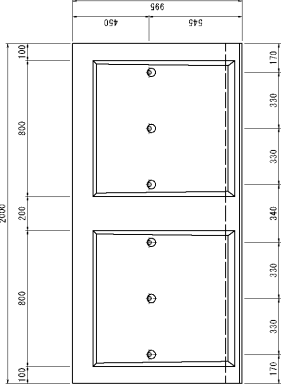

側面図

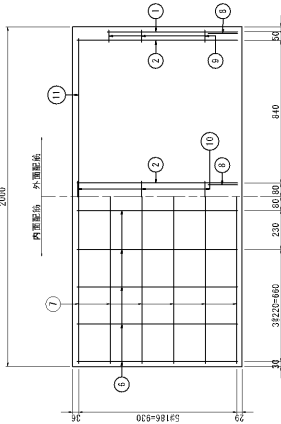


ワイドフレーム H900xB1800

2-115


材料表 (一本当り)

種別No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質
1	D13	2400	2	U	S315FA
2	D13	3750	4	U	S315FA
3	D6	1660	7	—	S315FA
4	D6	1660	8	—	S315FA
5	D6	1660	4	—	S225FA
6	φ4	640	20	—	S315FA
7	D6	1660	12	—	S315FA
8	D10	260	8	—	S315FA
9	φ4	130	12	—	S315FA
10	φ4	230	6	—	S315FA
11	D10	1660	2	—	S315FA
計			42.219		
製品重量			1490 kg		


平面図

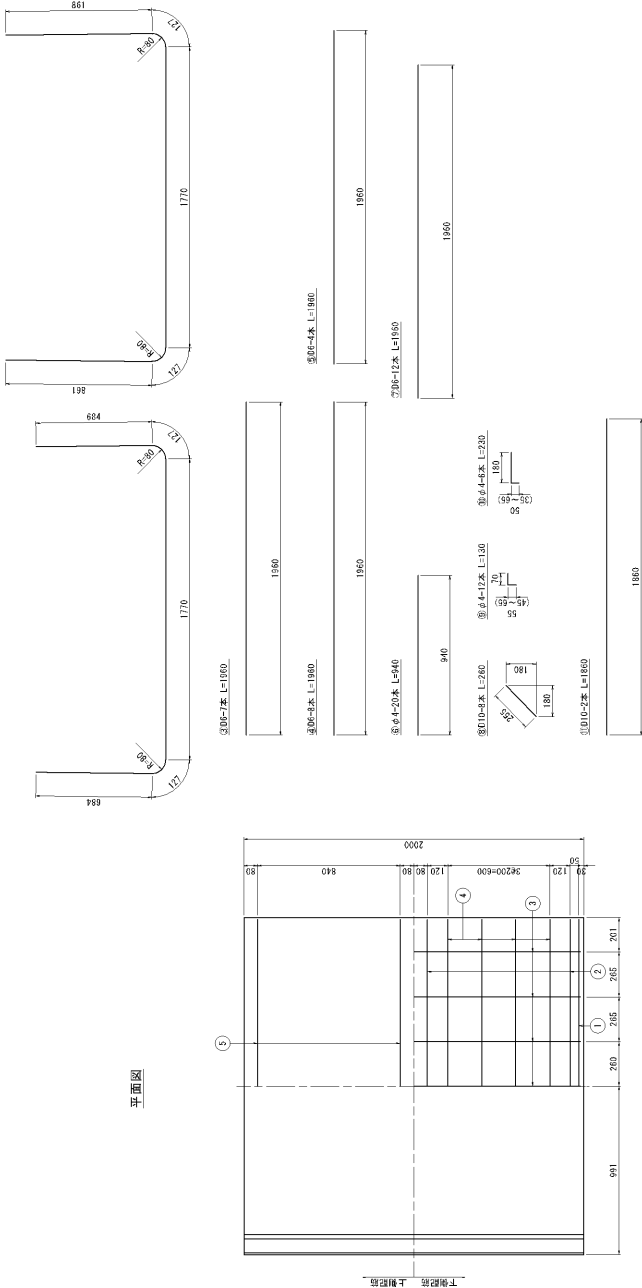


側面図

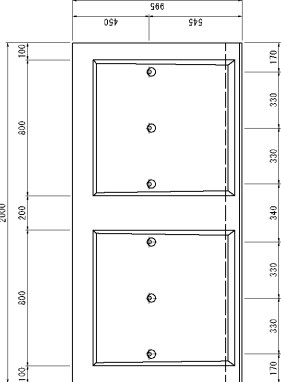

側面図

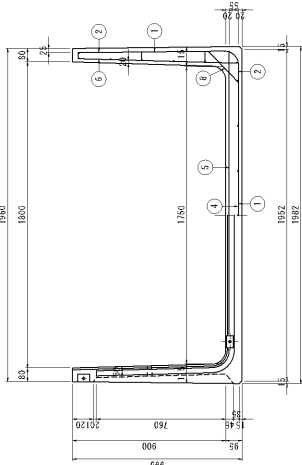

側面図

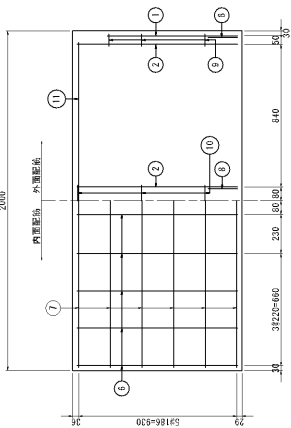

鉄筋加工図

①D13-2本 L=3400

②D13-4本 L=3750


ワイドフリューム H1000xB500

S=1:15


材 料 表 (一本当り)

種別	N	径 φ	長 さ (mm)	本数	重 量 (kg)	形 状	材 質
鉄 筋	1	D13	2360	2	4.696	└	S1029SA
	2	D13	2690	4	10.706	└	S1029SA
	3	D6	1960	3	1.464	└	S1029SA
	4	D6	670	8	1.335	└	S1029SA
	5	-	-	-	-	└	-
	6	φ4	1060	20	2.099	└	S1029SA
	7	D6	1960	14	6.933	└	S1029SA
	8	D10	280	8	1.254	└	S1029SA
	9	φ4	130	12	0.154	└	S1029SA
	10	φ4	240	6	0.143	└	S1029SA
	11	D10	1860	2	2.083	└	S1029SA
	計				30.758		
製品質量			1025	kg			


平面図

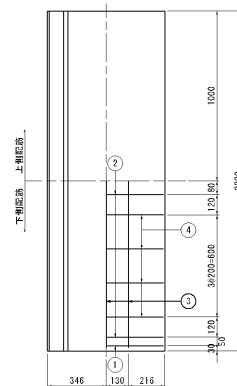


側面図

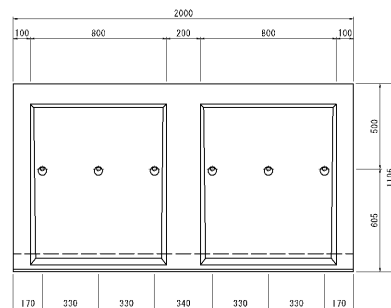


断面図



鉄筋加工図

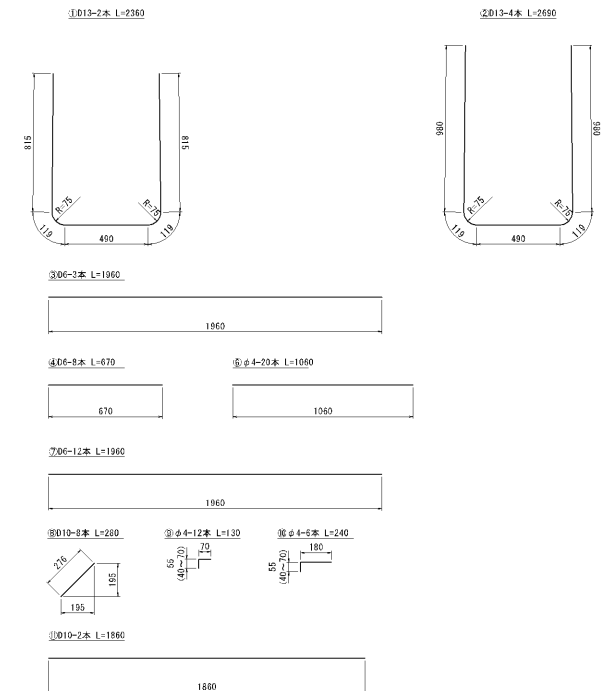

側面図

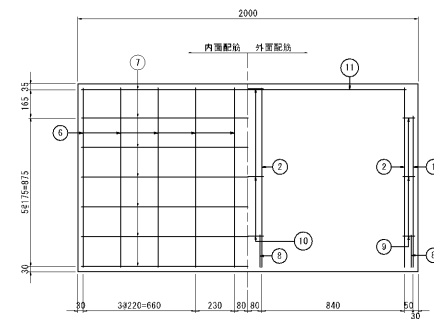


ワイドフリューム H1000xB600

S=1:16


材 料 表 (一本当り)

種別	N	φ	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13		2460	2	4.895	┐	S275SA
	2	D13		2780	4	11.104	┐	S275SA
	3	D6		1960	3	1.464	┐	S275SA
	4	D6		770	8	1.534	┐	S275SA
	5	-	-	-	-	-	-	-
	6	φ4		1060	20	2.099	┐	S275SA
	7	D6		1960	14	6.833	┐	S275SA
	8	D10		280	8	1.254	┐	S275SA
	9	φ4		130	12	0.154	┐	S275SA
	10	φ4		240	6	0.143	┐	S275SA
	11	D10		1860	2	2.083	┐	S275SA
計						31.963		
製品質量					1074	kg		


平面図

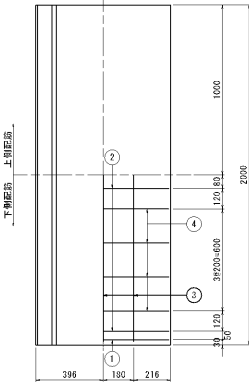


側面図

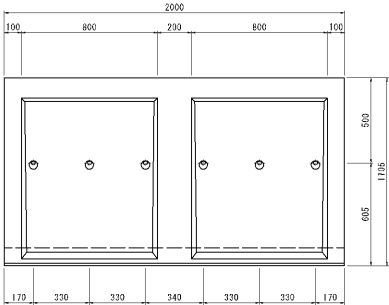


断面図



鉄筋加工図

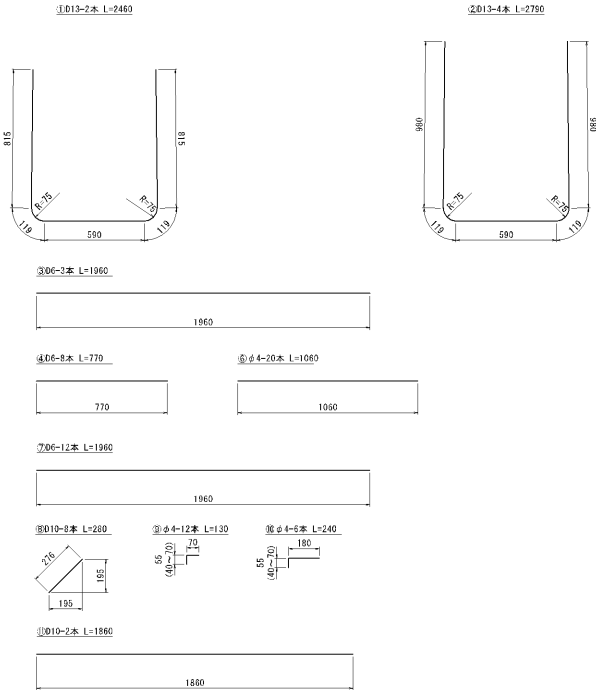

側面図

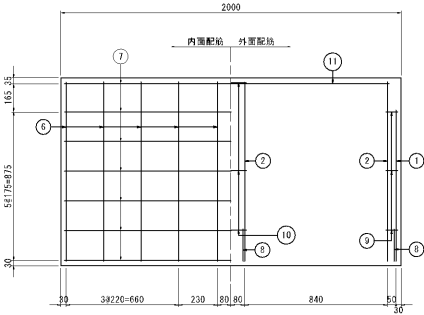

$$S=1:16$$

Technical drawings of various L-shaped and rectangular profiles with dimensions and material specifications.

① D13-2本 L=2560
 L-shaped profile with vertical leg height 815, horizontal leg width 690, and corner radius R75. The bottom flange has a width of 119.

② D13-4本 L=2890
 L-shaped profile with vertical leg height 980, horizontal leg width 690, and corner radius R75. The bottom flange has a width of 119.

③ 06-2本 L=1960
 Rectangular profile with length 1960.

④ D6-8本 L=870
 Rectangular profile with length 870.

⑤ φ4-20本 L=1060
 Rectangular profile with length 1060.

⑦ 06-12本 L=1960
 Rectangular profile with length 1960.

⑧ D10-8本 L=2890
 L-shaped profile with vertical leg height 276, horizontal leg width 195, and corner radius R75. The bottom flange has a width of 155.

⑨ φ4-12本 L=130
 Rectangular profile with length 130. The top flange has a width of 55 and a thickness of 10. The bottom flange has a width of 70 and a thickness of 10.

⑩ φ4-5本 L=240
 Rectangular profile with length 240. The top flange has a width of 55 and a thickness of 10. The bottom flange has a width of 70 and a thickness of 10.

⑪ D10-2本 L=1860
 Rectangular profile with length 1860.

[illegible]

Technical drawing of a U-shaped window frame. The drawing shows the frame's profile with various dimensions and numbered callouts (1-8) indicating specific components or features. The overall width is 870, and the overall height is 1135. The frame is divided into three main sections: a top horizontal section, a vertical section, and a bottom horizontal section. The dimensions are as follows:

- Overall width: 870
- Overall height: 1135
- Top horizontal section width: 700
- Top horizontal section height: 95
- Vertical section height: 1090
- Vertical section width: 25
- Bottom horizontal section width: 862
- Bottom horizontal section height: 105
- Internal dimensions: 650, 630, 253, 120, 15, 15, 20, 20
- Numbered callouts: 1, 2, 3, 4, 5, 6, 7, 8

Technical drawing of a double door unit. The overall width is 2000 mm and the overall height is 1700 mm. The unit consists of two doors, each 800 mm wide and 500 mm high. The doors are set within a frame that is 170 mm deep. The distance between the inner edges of the doors is 330 mm. The distance from the outer edge of the frame to the inner edge of the door is 170 mm. The drawing shows the doors in a closed position, with the handle area visible on the right side of each door.

種別	No	径 (mm)	長さ	本数	重量 (kg)	形状	材質
鉄	1	D13	2560	2	5.094	┌┐	S355JR
	2	D13	2890	4	11.502	┌┐	S355JR
	3	D6	1960	3	1.464	┌┐	S355JR
	4	D6	870	8	1.733	┌┐	S355JR
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	—	S355JR
	7	D6	1960	14	6.833	—	S355JR
	8	D10	280	8	1.264	—	S355JR
	9	φ4	130	12	6.154	—	S355JR
	10	φ4	240	6	0.143	—	S355JR
筋	11	D10	1860	2	2.083	—	S355JR
	計				32.359		
製品重量				1123	kg		


ワイドフリューム H1000xB800

S=1:15


材 料 表 (一本当り)

種別	N	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	2660	2	5.293	└┐	S275SA
	2	D13	2990	4	11.900	└┐	S275SA
	3	D6	1960	4	1.952	└┐	S275SA
	4	D6	970	8	1.932	└┐	S275SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	└┐	S275SA
	7	D6	1960	14	6.833	└┐	S275SA
	8	D10	280	8	1.254	└┐	S275SA
	9	φ4	130	12	0.154	└┐	S275SA
	10	φ4	240	6	0.143	└┐	S275SA
	11	D10	1860	2	2.083	└┐	S275SA
計					33.643		
製品質量				1173	kg		


平面図

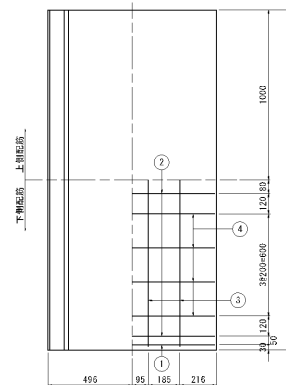


側面図

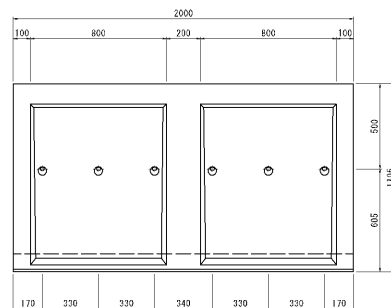


断面図



鉄筋加工図

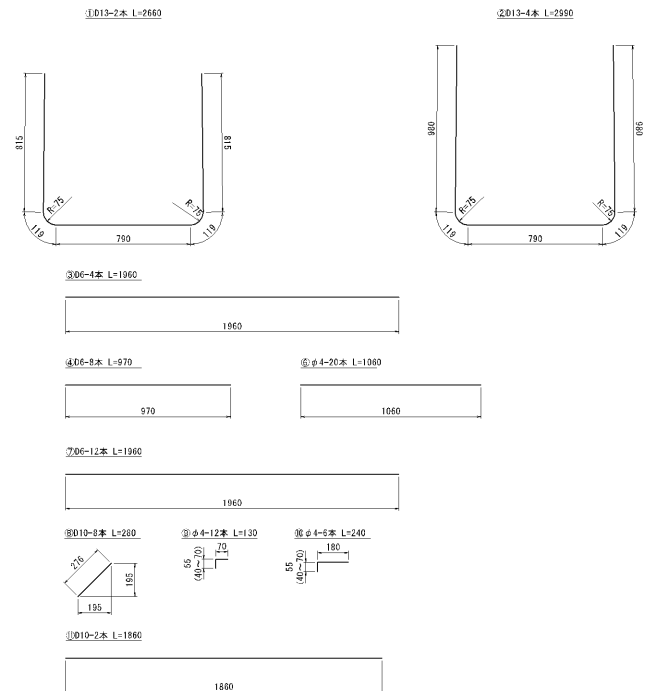

側面図

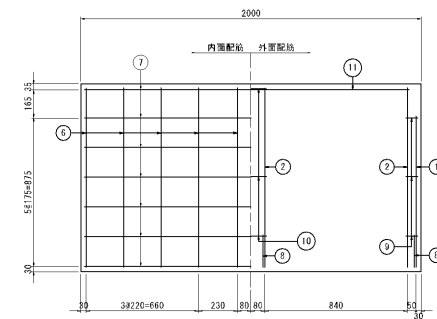


ワイドフリューム H1000xB900

S=1:15


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	2760	2	5.492	┌	S275SA
	2	D13	3090	4	12.298	└	S275SA
	3	D6	1960	4	1.952	—	S275SA
	4	D6	1070	8	2.131	—	S275SA
	5	—	—	—	—	—	—
	6	φ4	1060	20	2.099	—	S275SA
	7	D6	1960	14	6.833	—	S275SA
	8	D10	280	8	1.254	—	S275SA
	9	φ4	130	12	0.154	—	S275SA
	10	φ4	240	6	0.143	—	S275SA
	11	D10	1860	2	2.083	—	S275SA
計					34.439		
製品質量				1222	kg		


平面図

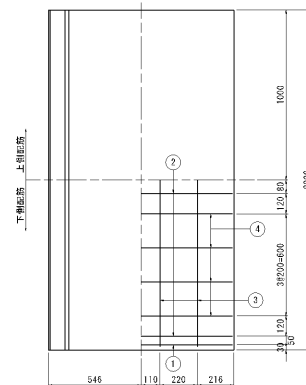


側面図

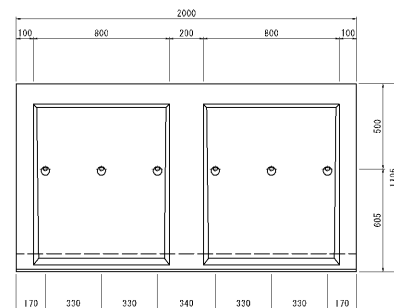

断面図




側面図

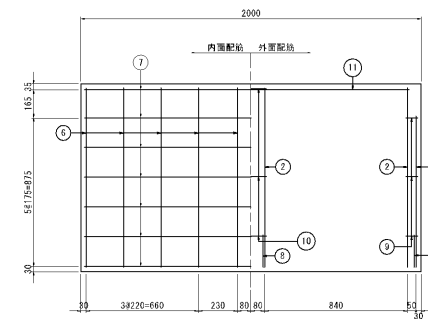


鉄筋加工図


①D13-2本 L=2760



②D13-4本 L=3090



③D6-4本 L=1960




④D6-8本 L=1070



⑤φ4-20本 L=1060



⑦D6-12本 L=1960



⑧D10-8本 L=280




⑨φ4-12本 L=130



⑩φ4-6本 L=240



⑪D10-2本 L=1860



$$S=1:15$$

Technical drawings of L-shaped and rectangular profiles with dimensions in millimeters.

①D13-2本 L=2860

Two L-shaped profiles. Each has a vertical leg of 815 mm, a horizontal leg of 990 mm, and a corner radius of R=75 mm. The inner corner width is 119 mm.

②D13-4本 L=3190

Two L-shaped profiles. Each has a vertical leg of 980 mm, a horizontal leg of 990 mm, and a corner radius of R=75 mm. The inner corner width is 119 mm.

③D6-4本 L=1960

One rectangular profile with a length of 1960 mm.

④D6-8本 L=1170

One rectangular profile with a length of 1170 mm.

⑤④-20本 L=1360

One rectangular profile with a length of 1060 mm.

⑦D6-12本 L=1960

One rectangular profile with a length of 1960 mm.

⑧D1D-2本 L=220

One L-shaped profile with a vertical leg of 185 mm, a horizontal leg of 195 mm, and a corner radius of R=75 mm.

⑨④-12本 L=130

One L-shaped profile with a vertical leg of 55 mm, a horizontal leg of 70 mm, and a corner radius of R=20 mm.

⑩④-5本 L=240

One L-shaped profile with a vertical leg of 55 mm, a horizontal leg of 180 mm, and a corner radius of R=20 mm.

⑪D1D-2本 L=1860

One rectangular profile with a length of 1860 mm.

Technical drawing of a window frame assembly in section. The drawing shows a cross-section of a window frame with various components labeled with circled numbers 1 through 4. Dimension lines indicate measurements in millimeters (mm). The total height of the frame is 1000 mm. The width of the frame is 596 mm. The height of the glass unit is 125 mm. The height of the frame above the glass is 255 mm. The height of the frame below the glass is 216 mm. The height of the frame to the right of the glass is 170 mm. The height of the frame to the left of the glass is 39 mm. The height of the frame to the right of the glass is 3920-4590 mm. The height of the frame to the left of the glass is 50 mm.

Technical drawing of a U-shaped staircase layout. The drawing shows the footprint of the staircase within a room. Key dimensions include a total width of 1170 and a total depth of 1735. The staircase itself has a width of 1000 and a depth of 1090. The landing area is 950 wide. Numbered callouts (1-8) indicate specific structural or finishing details: 1 points to the outer wall, 2 to the inner wall, 3 to the landing floor, 4 to the staircase treads, 5 to the staircase risers, 6 to the landing skirting, 7 to the outer wall skirting, and 8 to the inner wall skirting. The drawing also shows the placement of doors and windows.

Technical drawing of a double-door cabinet. The overall width is 2000 mm, divided into segments of 100, 800, 730, 800, and 100 mm. The overall height is 1710 mm, with a main body height of 500 mm and a base height of 605 mm. The cabinet has two doors, each with three circular handles. The base is shown with a dashed line indicating its depth. The bottom edge of the cabinet is divided into segments of 170, 330, 330, 340, 330, 330, and 170 mm.

種別	No	径 φ	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	2860	2	5.691	U	S325SA
	2	D13	3190	4	12.696	U	S325SA
	3	D6	1960	4	1.952	U	S325SA
	4	D6	1170	8	2.331	U	S325SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.039	U	S325SA
	7	D6	1960	14	6.833	U	S325SA
	8	D10	280	8	1.254	U	S325SA
	9	φ4	130	12	0.154	U	S325SA
	10	φ4	240	6	0.143	U	S325SA
防	11	D10	1660	2	2.083	U	S325SA
	計				35.236		
製品重量			1271	kg			


ワイドフリューム H1000xB1100

S=1:15


材 料 表 (一本当り)

種別	N	φ	径 (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	2960	2	5.890	┌	S275SA
	2	D13	3290	4	13.094	└	S275SA
	3	D6	1960	5	2.440	—	S275SA
	4	D6	1270	8	2.530	—	S275SA
	5	—	—	—	—	—	—
	6	φ4	1060	20	2.099	—	S275SA
	7	D6	1960	14	6.833	—	S275SA
	8	D10	780	8	1.254	—	S275SA
	9	φ4	130	12	0.154	—	S275SA
	10	φ4	240	6	0.143	—	S275SA
	11	D10	1860	2	2.083	—	S275SA
筋							
	計				36.520		
製品質量				1321	kg		


平面図

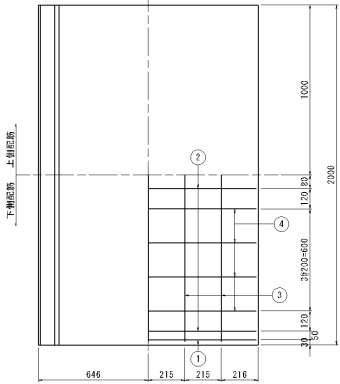


側面図

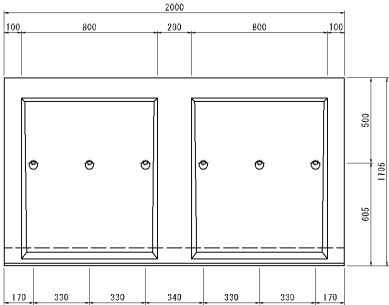


断面図

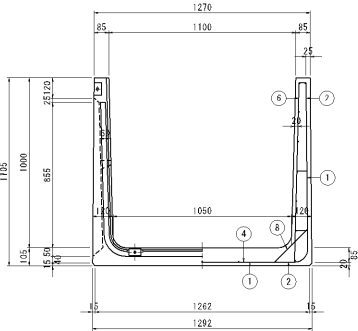

鉄筋加工図

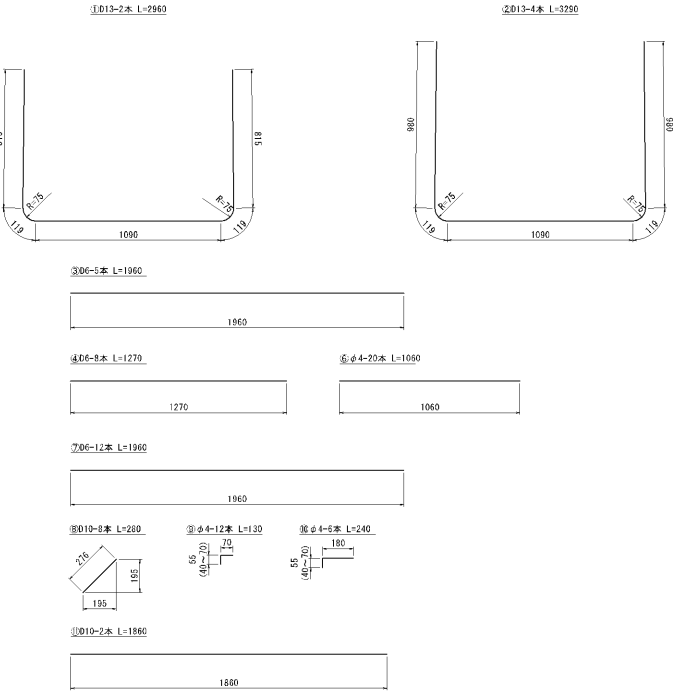

側面図

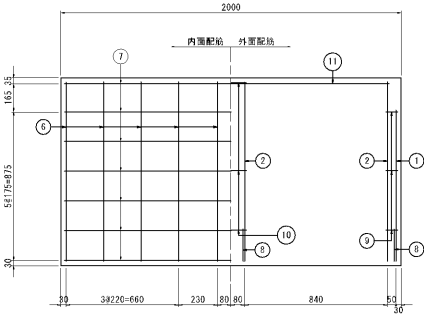


ワイドフリューム H1000xB1200

S=1:15


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	3060	2	6.089	┐	S275SA
	2	D13	3390	4	13.492	┐	S275SA
	3	D6	1960	5	2.440		S275SA
	4	D6	1370	8	2.729		S275SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099		S275SA
	7	D6	1960	14	6.933		S275SA
	8	D10	780	8	1.254		S275SA
	9	φ4	130	12	0.154		S275SA
	10	φ4	240	6	0.143		S275SA
	11	D10	1860	2	2.083		S275SA
計					37.316		
製品質量				1370	kg		


平面図

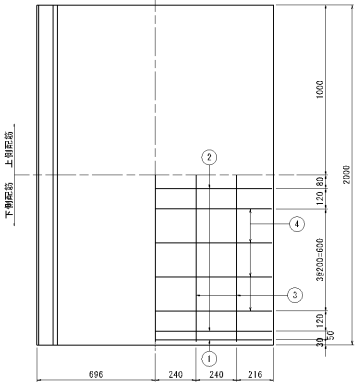


側面図

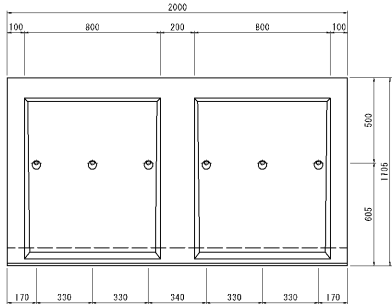


断面図

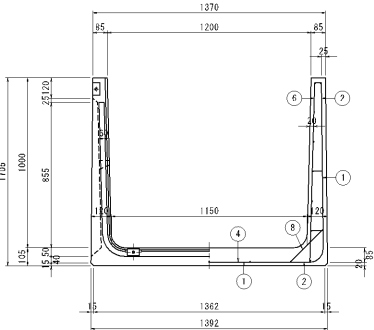

鉄筋加工図

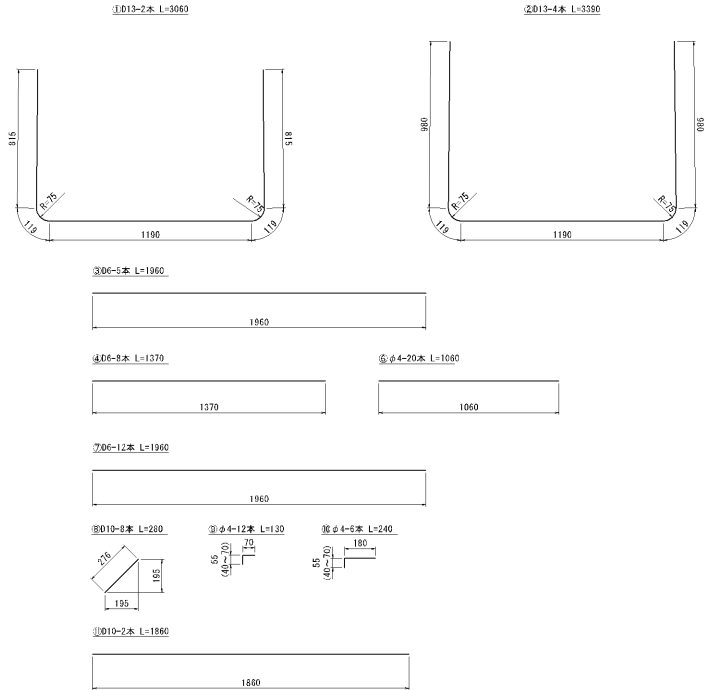

側面図

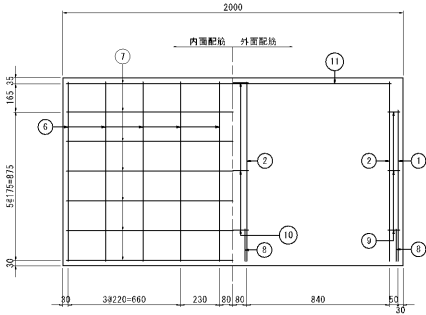


ワイドフリューム H1000xB1300

S=1:15


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	3160	2	6.288	┐	S275SA
	2	D13	3490	4	13.890	┐	S275SA
	3	D6	1960	5	2.440	┐	S275SA
	4	D6	1470	8	2.928	┐	S275SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	┐	S275SA
	7	D6	1960	14	6.933	┐	S275SA
	8	D10	280	8	1.254	┐	S275SA
	9	φ4	130	12	0.154	┐	S275SA
	10	φ4	240	6	0.143	┐	S275SA
	11	D10	1860	2	2.083	┐	S275SA
計					38.112		
製品質量				1419	kg		


平面図

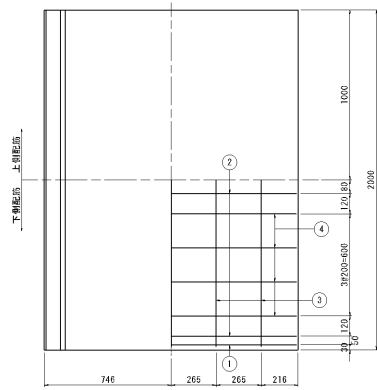


鉄筋加工図

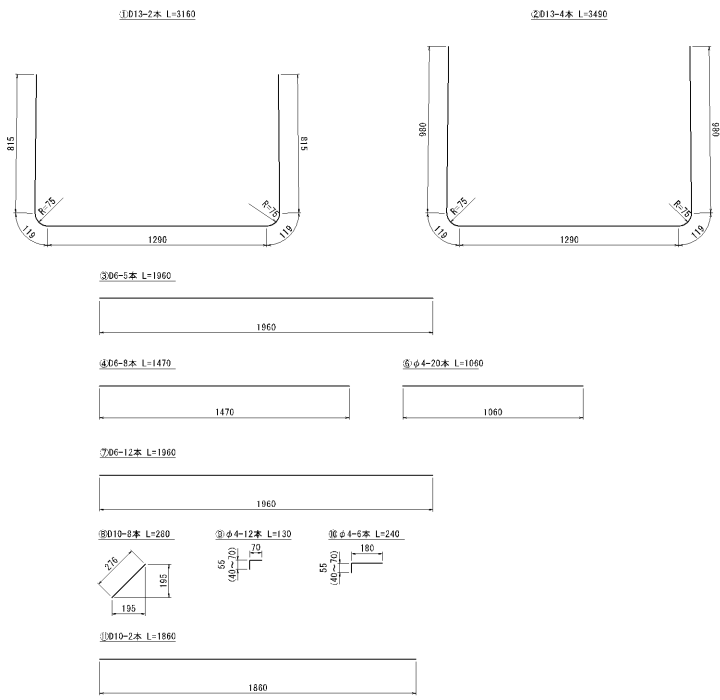


側面図

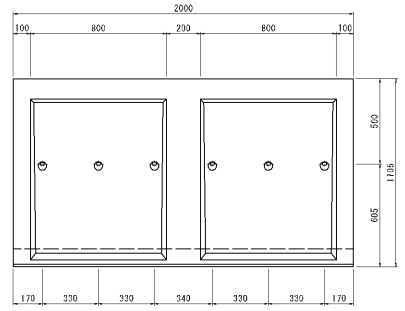

断面図

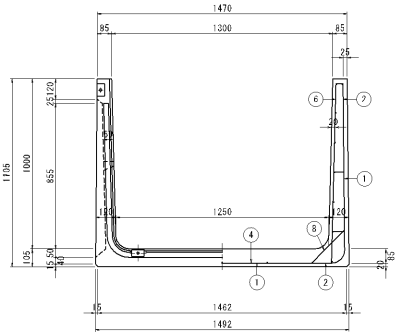

側面図

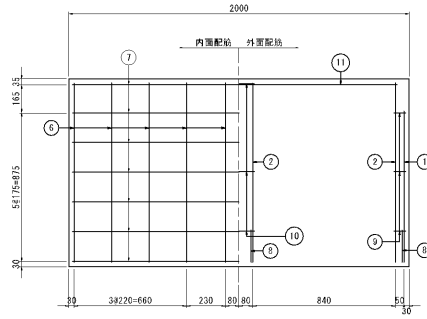


ワイドフリューム H1000xB1400

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形 状	材 質
鉄 筋	1	D13	3260	2	6.487	┐	S1020SA
	2	D13	3590	4	14.288	┐	S1020SA
	3	D6	1960	6	2.028	┐	S1020SA
	4	D6	1570	8	3.127	┐	S1020SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	┐	S1020SA
	7	D6	1960	14	6.833	┐	S1020SA
	8	D10	780	8	1.254	┐	S1020SA
	9	φ4	130	12	0.154	┐	S1020SA
	10	φ4	240	6	0.143	┐	S1020SA
	11	D10	1860	2	2.083	┐	S1020SA
計					39.396		
製品質量				1469	kg		


平面図

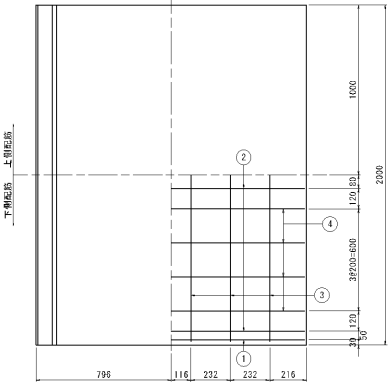


側面図

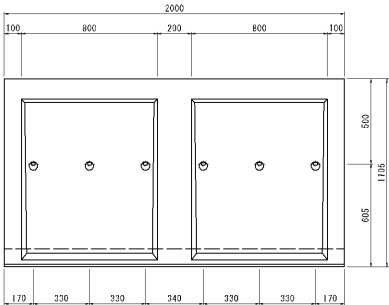


断面図

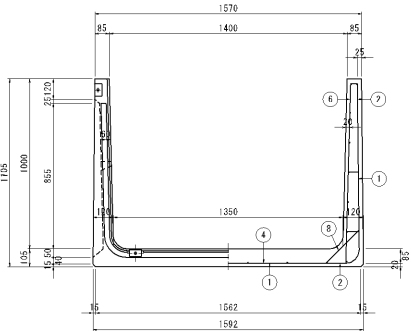

鉄筋加工図

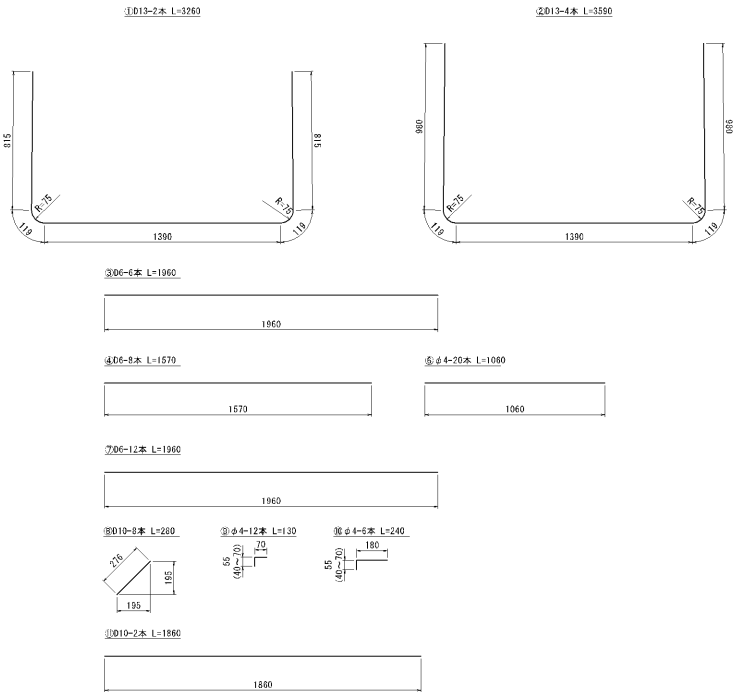

側面図

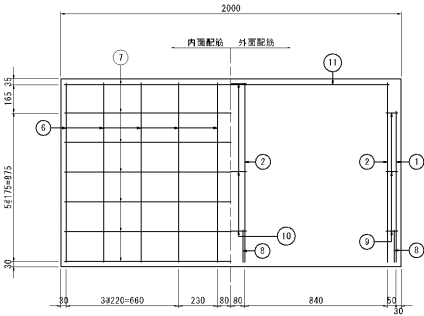


ワイドフリューム H1000xB1500

S=1:16


材 料 表 (一本当り)

種別	N	φ	径 (mm)	長さ	本数	重 量 (kg)	形 状	材 質
鉄	1	D13	3360	2	6.686	┌	S275SA	
	2	D13	3690	4	14.686	└	S275SA	
	3	D6	1960	6	2.928	┌	S275SA	
	4	D6	1670	8	3.327	└	S275SA	
	5	-	-	-	-	-	-	
	6	φ4	1060	20	2.099	┌	S275SA	
	7	D6	1960	14	6.933	└	S275SA	
	8	D10	780	8	1.254	┌	S275SA	
	9	φ4	130	12	0.154	└	S275SA	
	10	φ4	240	6	0.143	┌	S275SA	
	11	D10	1860	2	2.083	└	S275SA	
筋								
	計					40.193		
製品質量			1516	kg				


平面図

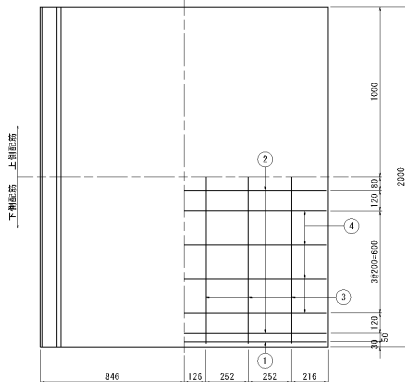


側面図

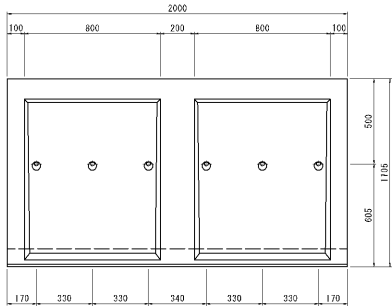


断面図

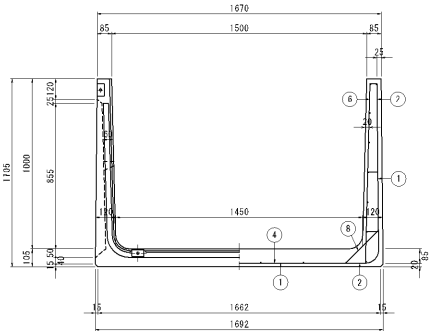

鉄筋加工図

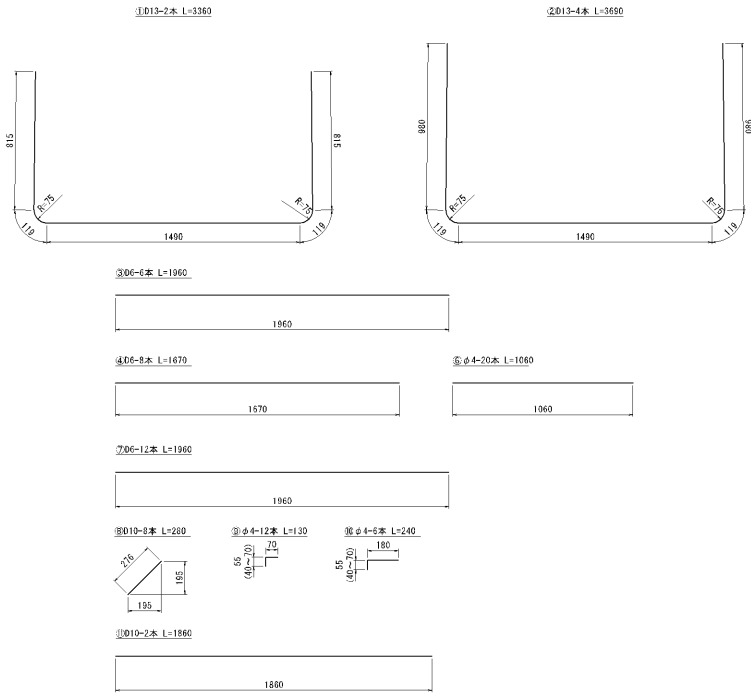

側面図

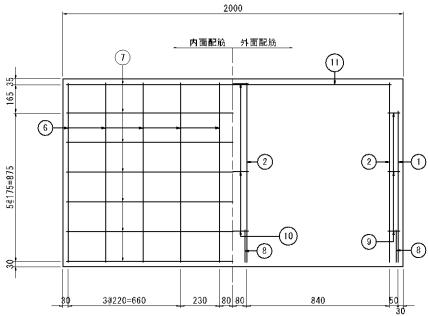


ワイドフリューム H1000xB1600

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	3460	2	6.885	┌	S529SA
	2	D13	3790	4	15.084	└	S529SA
	3	D6	1960	6	2.928	—	S529SA
	4	D6	1770	8	3.526	—	S529SA
	5	D6	1770	4	1.763	—	S529SA
	6	φ4	1060	20	2.099	—	S529SA
	7	D6	1960	14	6.933	—	S529SA
	8	D10	280	8	1.254	—	S529SA
	9	φ4	130	12	0.154	—	S529SA
	10	φ4	240	6	0.143	—	S529SA
	11	D10	1860	2	2.083	—	S529SA
計					42.752		
製品質量				1567	kg		


平面図

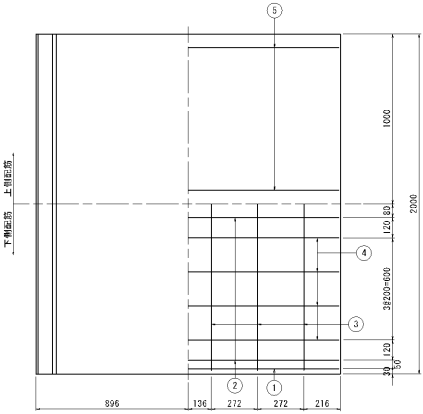


側面図

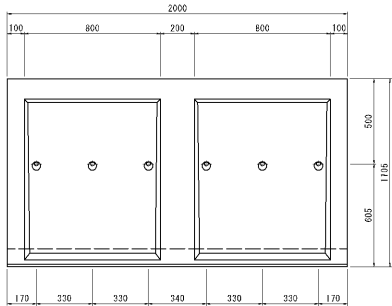


断面図

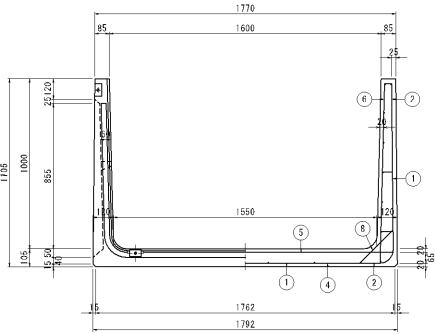

鉄筋加工図

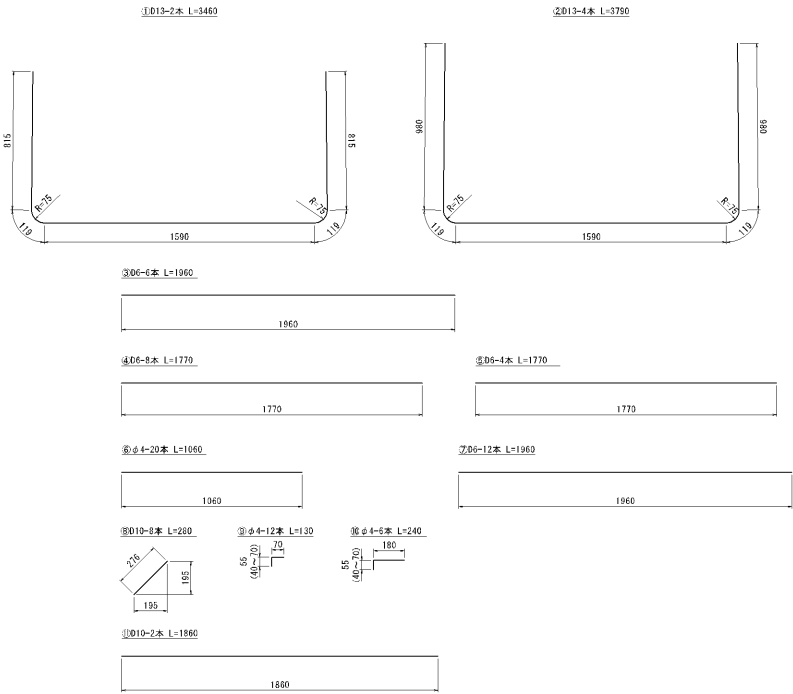

側面図

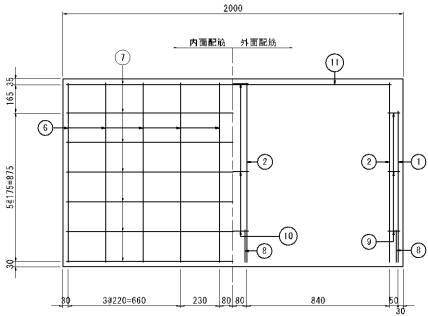

$$S=1:16$$

種別	N o	径 長 さ (mm)	本数	重 量 (kg)	形 状	材 質	
鉄	1	D13	3560	2	7.084	U	SD255A
	2	D13	3890	4	15.492	U	SD255A
	3	D6	1960	7	3.416	U	SD255A
	4	D6	1870	8	3.725	U	SD255A
	5	D6	1870	4	1.863	U	SD255A
	6	φ4	1060	20	2.099	U	SD255A
	7	D6	1960	14	6.933	U	SD255A
	8	D10	280	8	1.254	U	SD255A
	9	φ4	130	12	0.154	U	SD255A
	10	φ4	240	6	0.143	U	SD255A
筋	11	D10	1860	2	2.082	U	SD255A
計				44.136			
製品重量			1617	kg			

[illegible]

Technical drawing of a double-door cabinet. The overall width is 2000 mm, divided into segments of 100, 800, 730, 800, and 100 mm. The overall height is 1710 mm, with a main body height of 500 mm and a base height of 605 mm. The cabinet has two doors, each with a handle. The base is shown with a dashed line indicating its depth. The bottom dimensions are 170, 330, 330, 340, 330, 330, and 170 mm.

[illegible]

①D13-2本 L=3560

(2013-4本 L=3890)

③06-7本 L=1960

	1960
--	------

④06-8本 L=1870

1870

⑥ $\phi 4-20$ 本 $L=1060$

1060

⑧D10-8本 L=280

⑤ $\phi 4-12$ 本 $L=130$

①φ4-6本 L=240

①D10-2本 L=1860

1860


ワイドフリューム H1000xB1800

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13	3660	2	7.283	└	S3295A
	2	D13	3990	4	15.880	└	S3295A
	3	D6	1960	7	3.416	└	S3295A
	4	D6	1970	8	3.924	└	S3295A
	5	D6	1970	4	1.962	└	S3295A
	6	φ4	1060	20	2.099	└	S3295A
	7	D6	1960	14	6.833	└	S3295A
	8	D10	780	8	1.254	└	S3295A
	9	φ4	130	12	0.154	└	S3295A
	10	φ4	240	6	0.143	└	S3295A
	11	D10	1860	2	2.083	└	S3295A
筋							
	計				45.031		
製品質量			1666	kg			


平面図

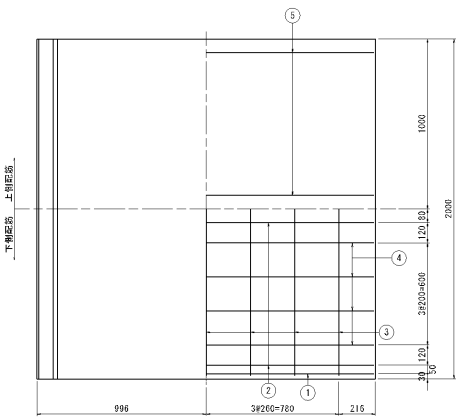


鉄筋加工図

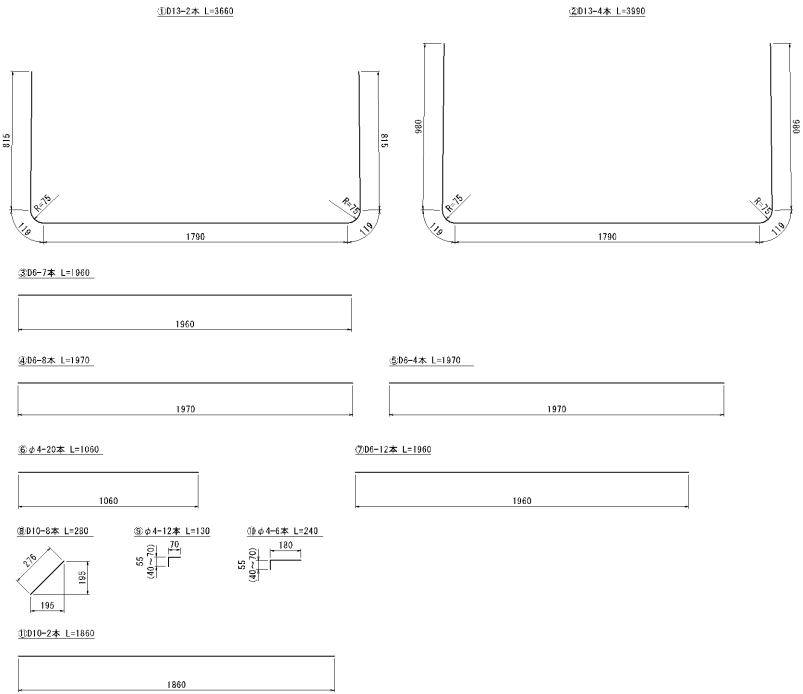


側面図

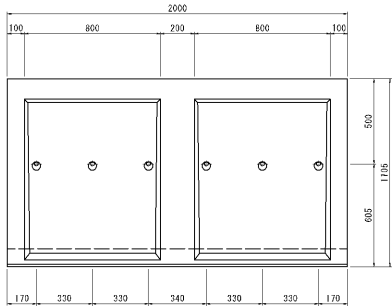

断面図

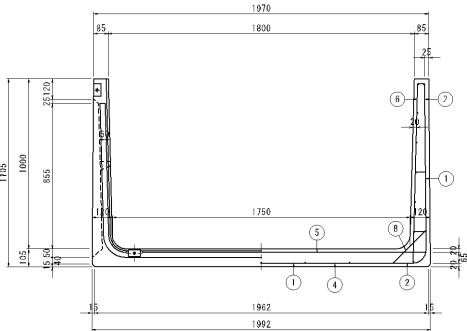

側面図

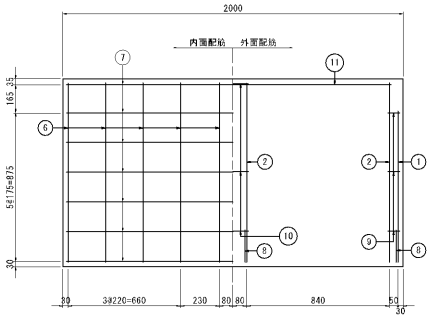


ワイドフリューム H1100xB600

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	2620	2	8.174	□	S275JR
2	D16	3020	4	18.845	□	S275JR
3	D6	1860	3	1.464	—	S275JR
4	D6	760	8	1.514	—	S275JR
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S275JR
7	D6	1860	16	7.859	—	S275JR
8	D10	290	8	1.299	—	S275JR
9	φ4	140	12	0.168	—	S275JR
10	φ4	250	6	0.119	—	S275JR
11	D10	1860	2	2.685	—	S275JR
計				42.911		
製品重量				1187 kg		


平面図

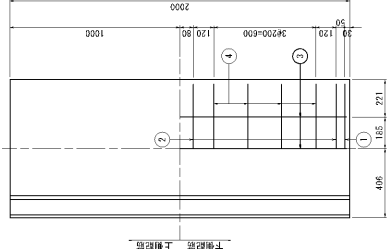


縦断加工図

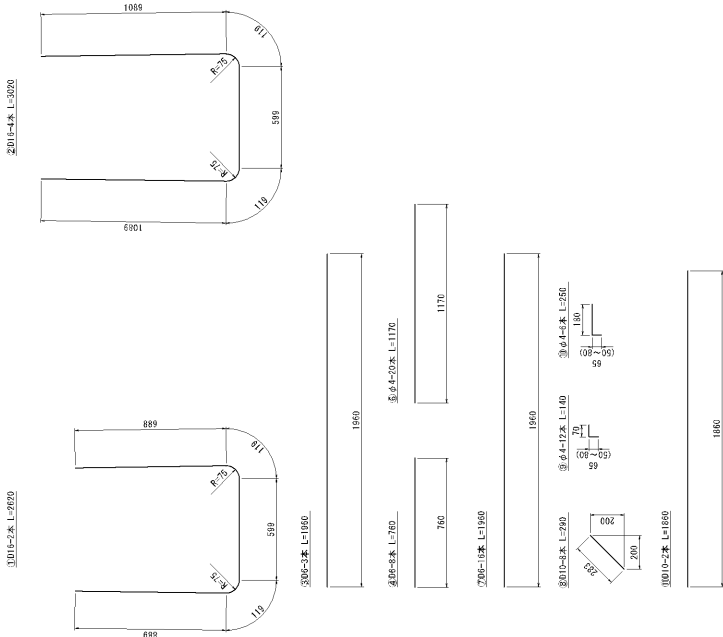


側面図

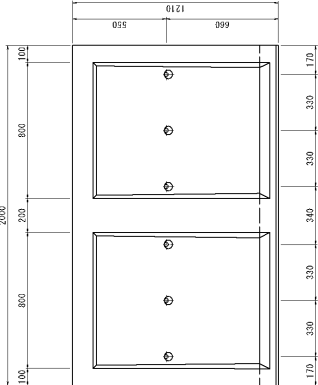

断面図



側面図

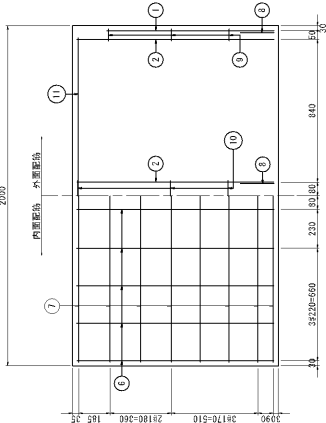


ワイドフリューム H1100xB700

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	2720	2	8.466	□	S275JR
2	D16	3120	4	19.469	□	S275JR
3	D6	1860	3	1.464	—	S275JR
4	D6	660	8	1.713	—	S275JR
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S275JR
7	D6	1860	16	7.859	—	S275JR
8	D10	290	8	1.299	—	S275JR
9	φ4	140	12	0.168	—	S275JR
10	φ4	250	6	0.119	—	S275JR
11	D10	1860	2	2.683	—	S275JR
計				44.955		
製品重量			1239	kg		


平面図

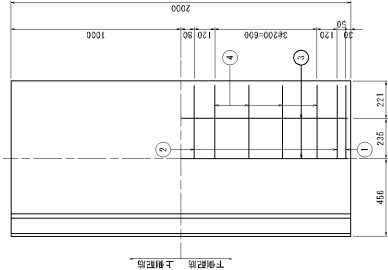


2004-4本 L=3120




3004-2本 L=2720




縦筋加工図

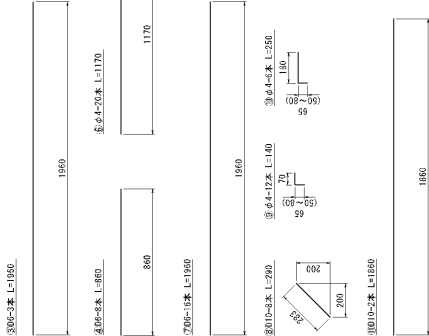


側面図

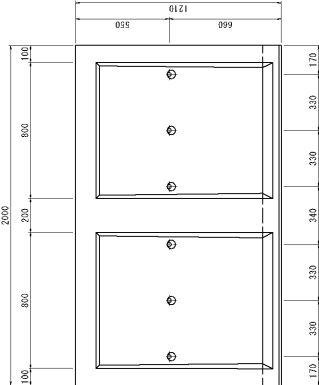

断面図



側面図

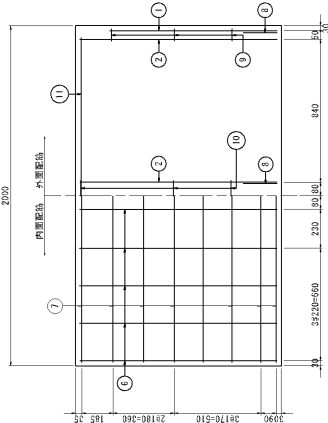


ワイドフレーム H1100xB800

2-115


材料表 (一本当り)

種類	N.º	径	長さ	本数	重量	形状	材質
鉄	1	φ16	2820	2	8.798	□	S47FSA
	2	φ16	3220	4	20.093	□	S47FSA
	3	φ6	1860	4	1.852	—	S47FSA
	4	φ6	1860	8	1.812	—	S47FSA
	5	—	—	—	—	—	—
	6	φ4	1170	20	2.317	—	S47FSA
	7	φ6	1860	16	7.859	—	S47FSA
	8	φ10	2960	8	1.299	—	S47FSA
	9	φ4	140	12	0.168	—	S47FSA
	10	φ4	250	6	0.119	—	S47FSA
	11	φ10	1860	2	2.683	—	S47FSA
鋁							
計					46.579		
製品重量					1290 kg		


平面図

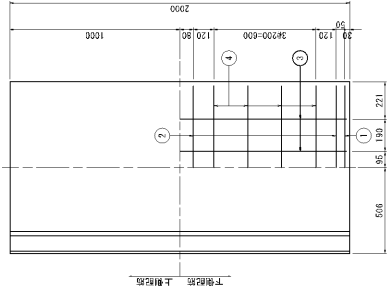


縁加工図

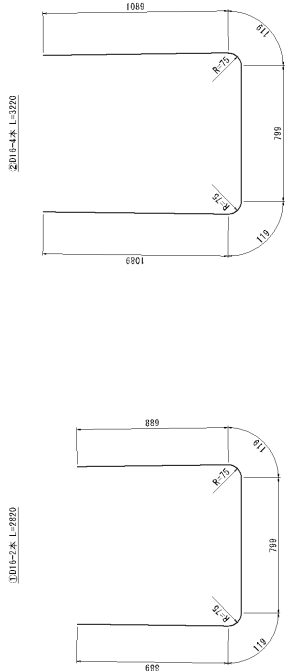


側面図

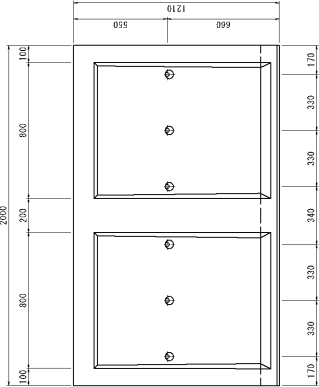

断面図



側面図

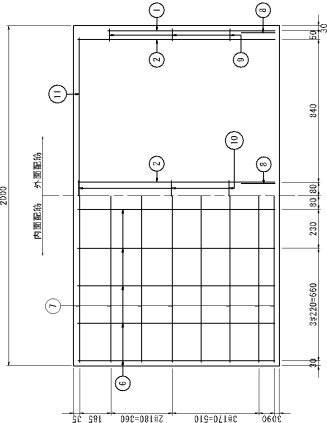


ワイドフレーム H1100xB900

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	2820	2	9.110	□	S47FSA
2	D16	3320	4	20.717	□	S47FSA
3	D6	1860	4	1.852	—	S47FSA
4	D6	1090	8	2.111	—	S47FSA
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S47FSA
7	D6	1860	16	7.859	—	S47FSA
8	D10	2960	8	1.299	—	S47FSA
9	φ4	140	12	0.168	—	S47FSA
10	φ4	250	6	0.119	—	S47FSA
11	D10	1860	2	2.683	—	S47FSA
計				47.712		
製品重量				1342 kg		


平面図

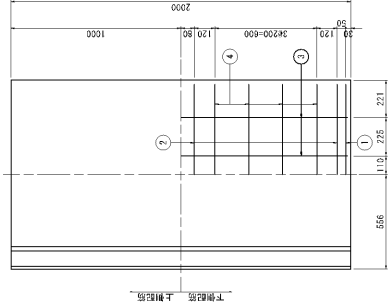


縦筋加工図

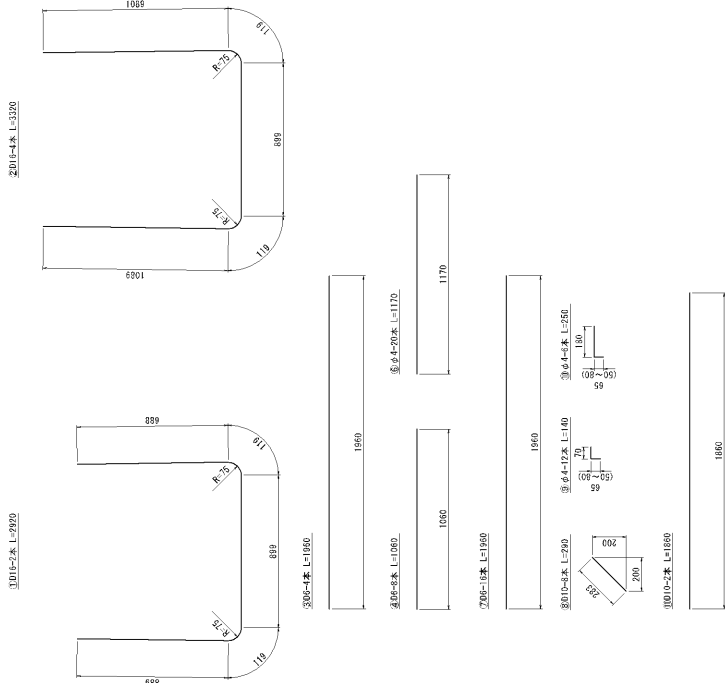


側面図

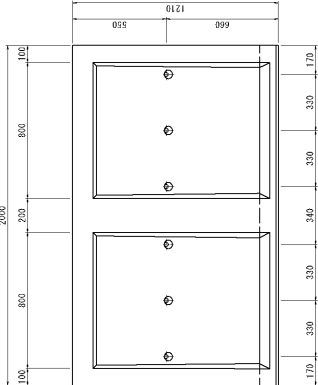

断面図



側面図

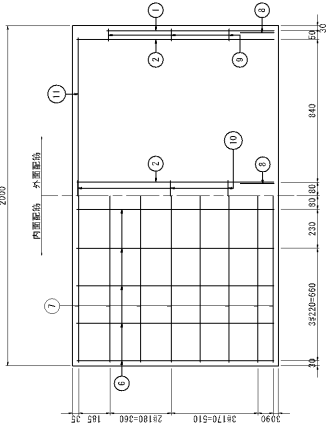


ワイドフレーム H1100xB1100

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3120	2	9.724	□	S47F5A
2	D16	3520	4	21.865	□	S47F5A
3	D6	1860	5	2.440	—	S47F5A
4	D6	1260	8	2.510	—	S47F5A
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S47F5A
7	D6	1860	16	7.859	—	S47F5A
8	D10	2960	8	1.299	—	S47F5A
9	φ4	140	12	0.168	—	S47F5A
10	φ4	250	6	0.119	—	S47F5A
11	D10	1860	2	2.683	—	S47F5A
計				50.472		
製品重量				1446 kg		


平面図

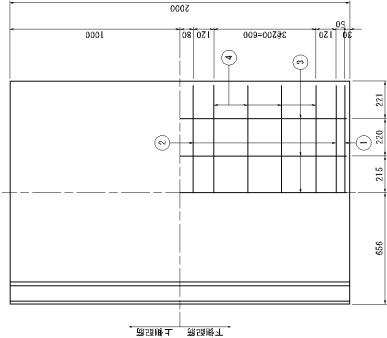


縁加工図

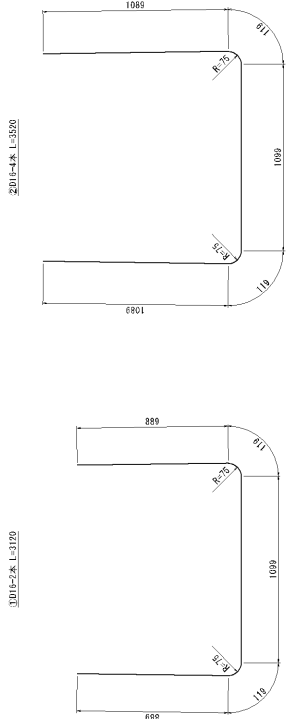


側面図

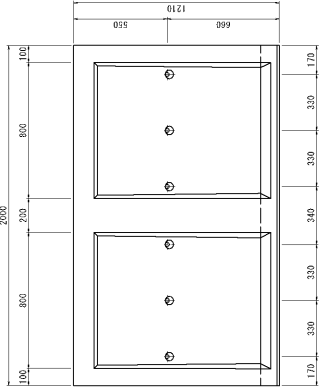

断面図

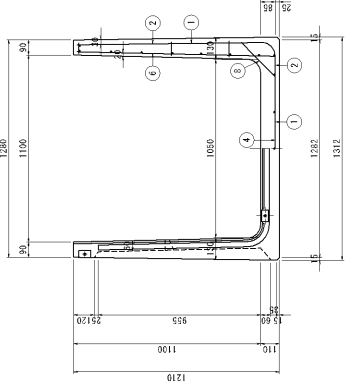

側面図

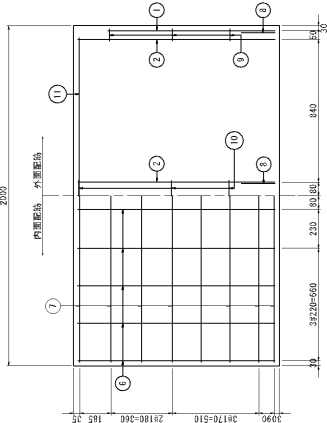


ワイドフレーム H1100xB1200

$$S=1:15$$


材料表 (一本当り)

類別 No	型	量 (mm)	式	本數	重量 (kg)	形狀	材質
1	D16	3220	2	10,446	—	□	SJ2152
2	D16	3920	4	22,489	—	□	SJ2152
3	D5	1960	5	2,749	—	—	SJ2152
4	D5	1850	8	2,149	—	—	SJ2152
5	—	—	—	—	—	—	—
6	54	1170	20	2,317	—	—	SJ2152
7	D5	1960	16	7,599	—	—	SJ2212
8	D10	2900	8	1,259	—	—	SJ2212
9	54	140	12	6,186	—	—	SJ2212
10	54	250	6	6,149	—	—	SJ2212
11	D10	1960	2	2,683	—	—	SJ2212
計				51,607			
重量合計				1487	kg		


图 10-1-1

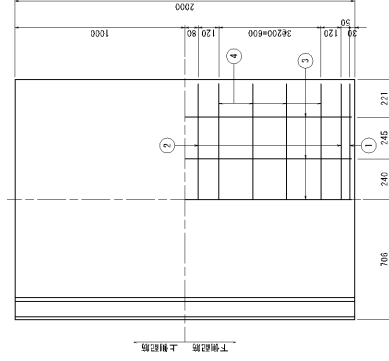


側面図

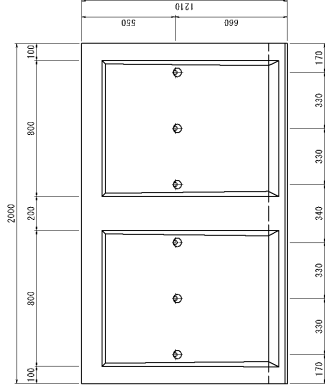


断面図

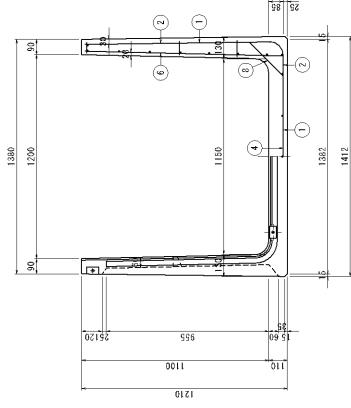

側面圖

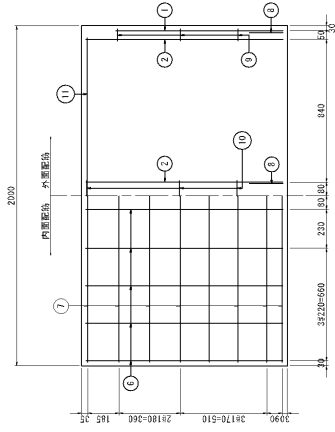

鉄筋加工図

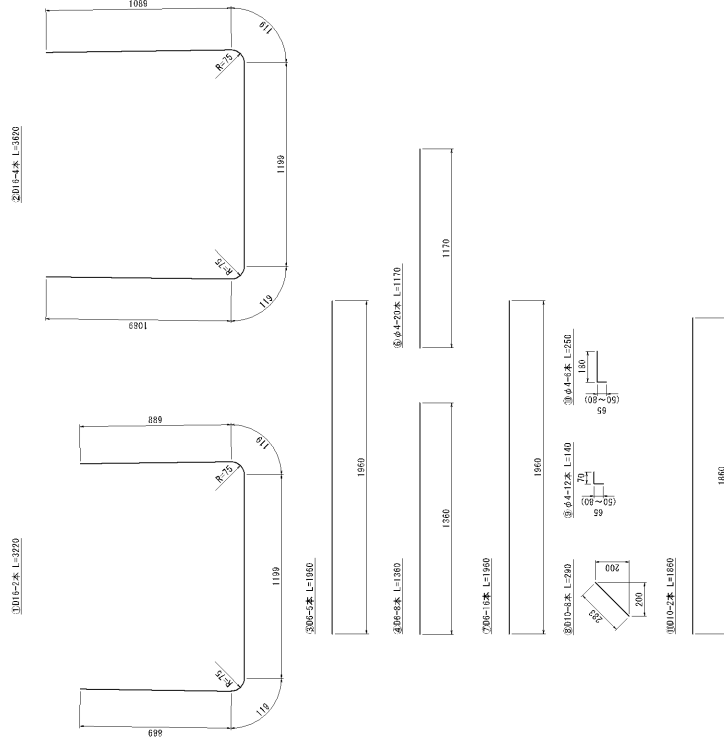


ワイドフレーム H1100xB1500

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3520	2	10.882	□	S47F5A
2	D16	3520	4	24.461	□	S47F5A
3	D6	1860	6	2.828	—	S47F5A
4	D6	1860	8	3.237	—	S47F5A
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S47F5A
7	D6	1860	16	7.859	—	S47F5A
8	D10	2960	8	1.299	—	S47F5A
9	φ4	140	12	0.168	—	S47F5A
10	φ4	250	6	0.119	—	S47F5A
11	D10	1860	2	2.683	—	S47F5A
計				55.501		
製品重量				1652 kg		


平面図

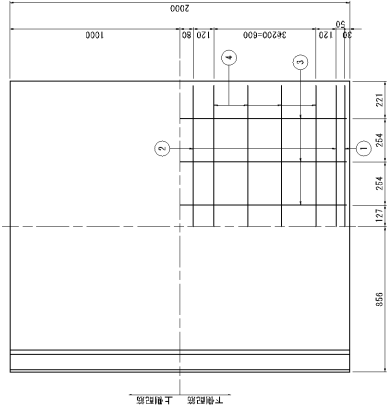


縁加工図

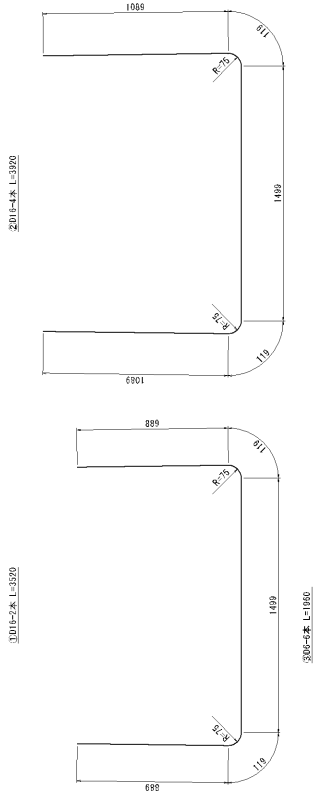


側面図

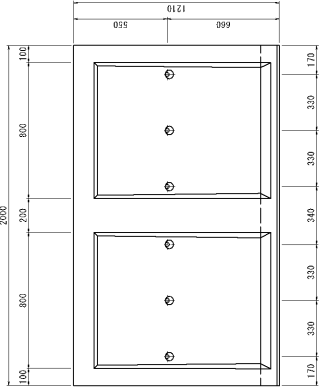

断面図

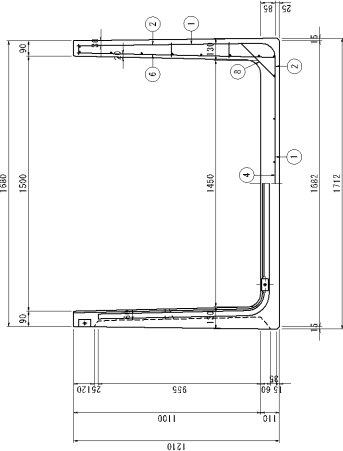

側面図

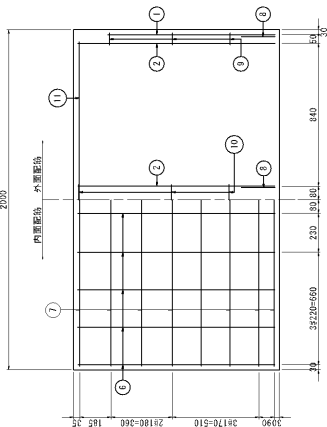


ワイドフレーム H1100xB1600

$$S=1:15$$


材料表 (一本当り)

塊角NO	定	長	寸	本数	厚 (mm)	形	材	質
1	D16	9620	2	1,284		□	32125A	
2	D16	4020	45	25,085		□	32125A	
3	D5	1960	6	2,828		—	32125A	
4	D5	1760	8	3,506		—	32125A	
5	—	—	—	—		—	—	
6	φ4	1170	20	2,317		—	32125A	
7	D5	1960	16	7,859		—	32125A	
8	D10	290	8	1,299		—	32125A	
9	φ4	140	12	6,166		—	32125A	
10	φ4	250	6	0,149		—	32125A	
11	D10	1860	2	2,083		—	32125A	
計				56,636				


平面图

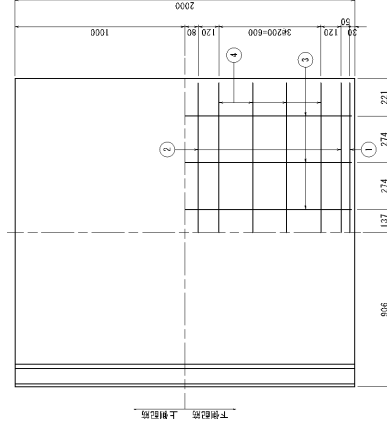


側面図

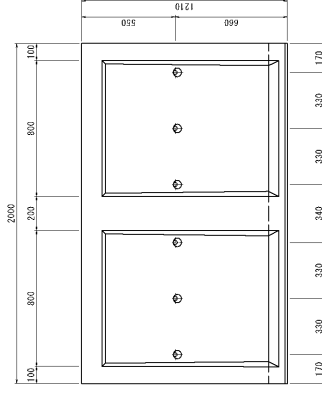


断面図

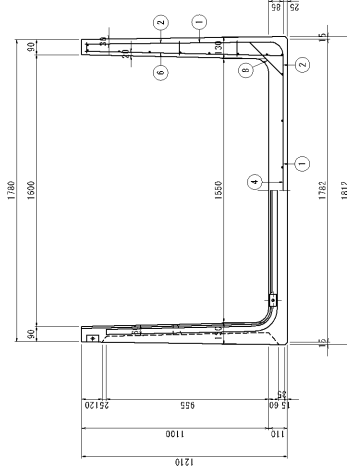

側面図

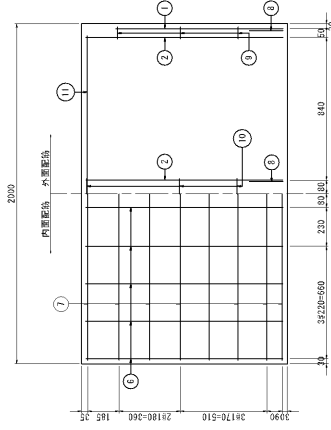

钢筋加工图

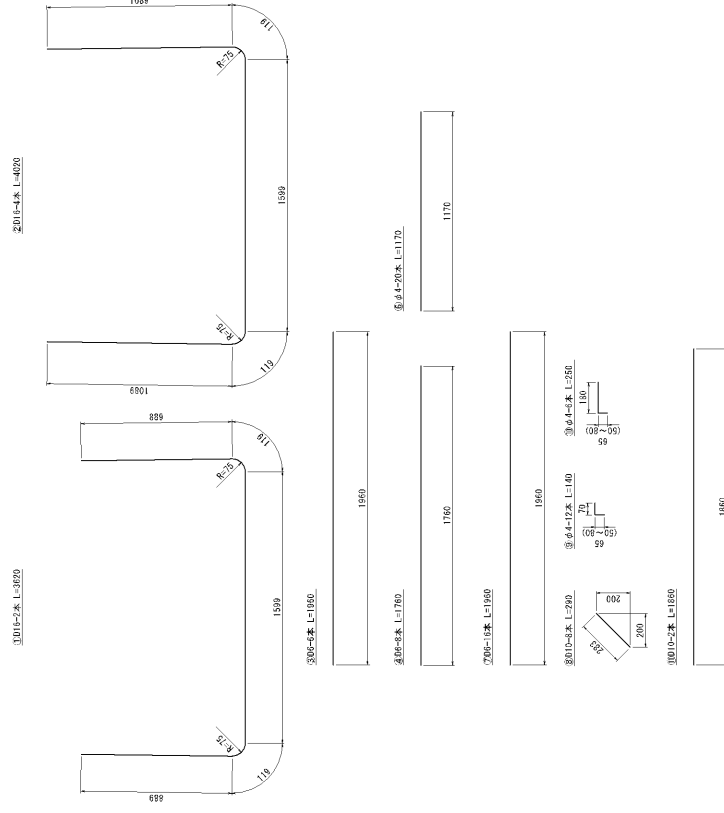


ワイドフレーム H1100xB1700

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3720	2	11.606	□	S115A
2	D16	4120	4	25.709	□	S115A
3	D6	1960	7	5.416	—	S115A
4	D6	1860	8	5.705	—	S115A
5	—	—	—	—	—	—
6	φ4	1170	20	2.317	—	S115A
7	D6	1960	16	7.809	—	S115A
8	D16	290	8	1.269	—	S115A
9	φ4	140	12	0.166	—	S115A
10	φ4	250	6	0.119	—	S115A
11	D16	1860	2	2.483	—	S115A
計				58.259		
製品重量				1756 kg		


平面図

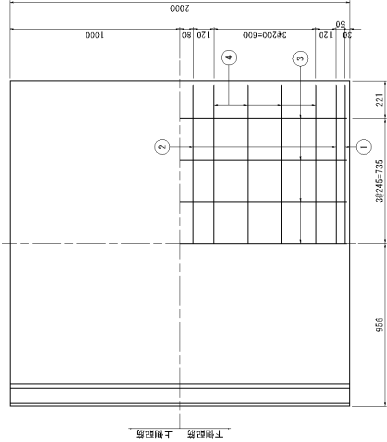


鉄筋加工図

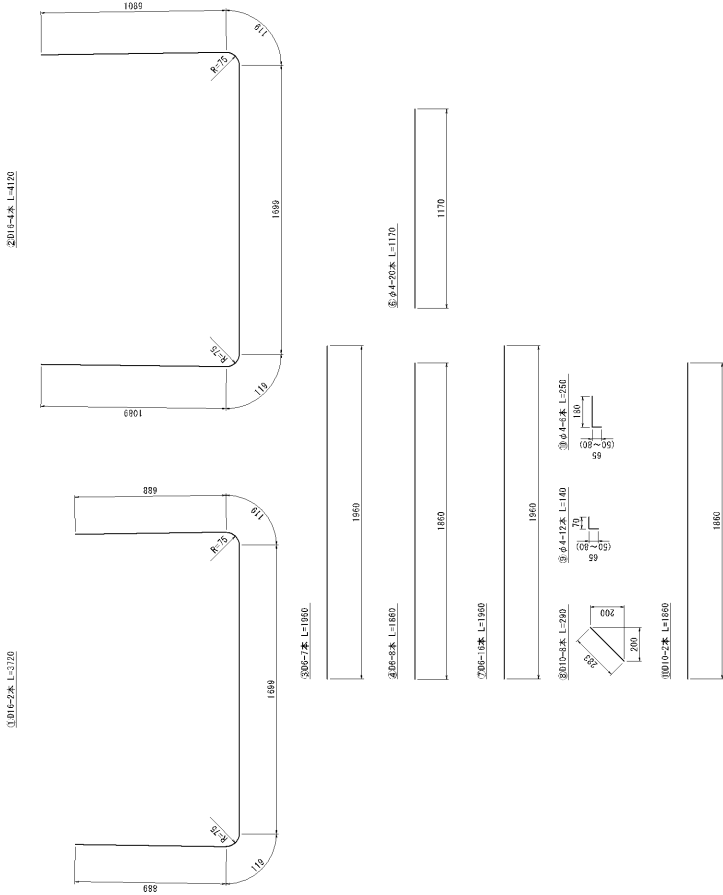


側面図

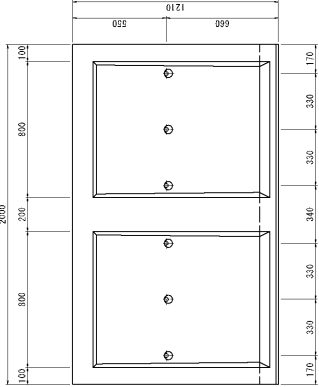

断面図

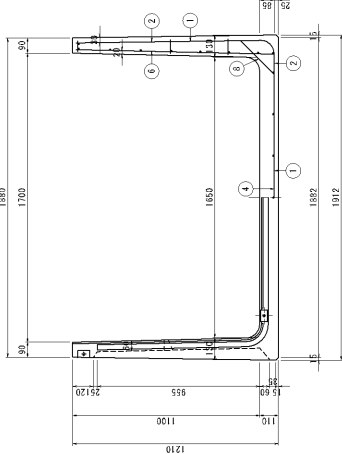

側面図

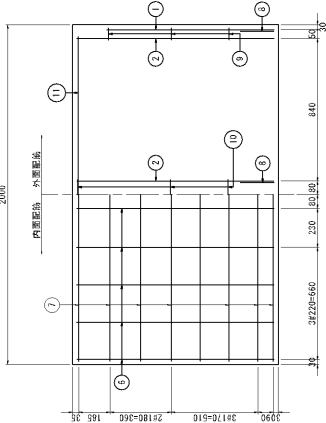


ワイドフレーム H1100xB1800

2=115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	3820	2	11.916	□	S1115A
2	D16	4220	4	26.353	□	S1115A
3	D6	1960	7	5.416	—	S1115A
4	D6	1960	8	5.904	—	S1115A
5	D6	1960	4	1.952	—	S2255A
6	φ4	1170	20	2.317	—	S1115A
7	D6	1960	16	7.809	—	S1115A
8	D16	2900	8	1.269	—	S1115A
9	φ4	140	12	0.166	—	S1115A
10	φ4	250	6	0.119	—	S1115A
11	D16	1860	2	2.083	—	S1115A
計				61.246		
製品重量			1807	kg		


平面図

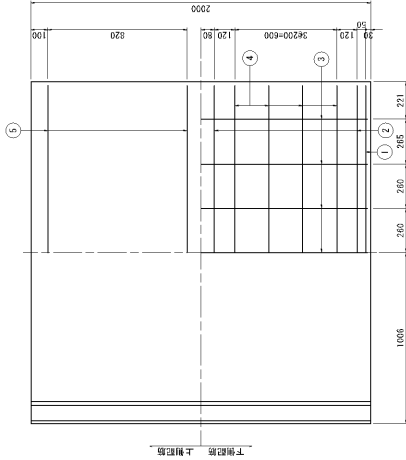


鉄筋加工図

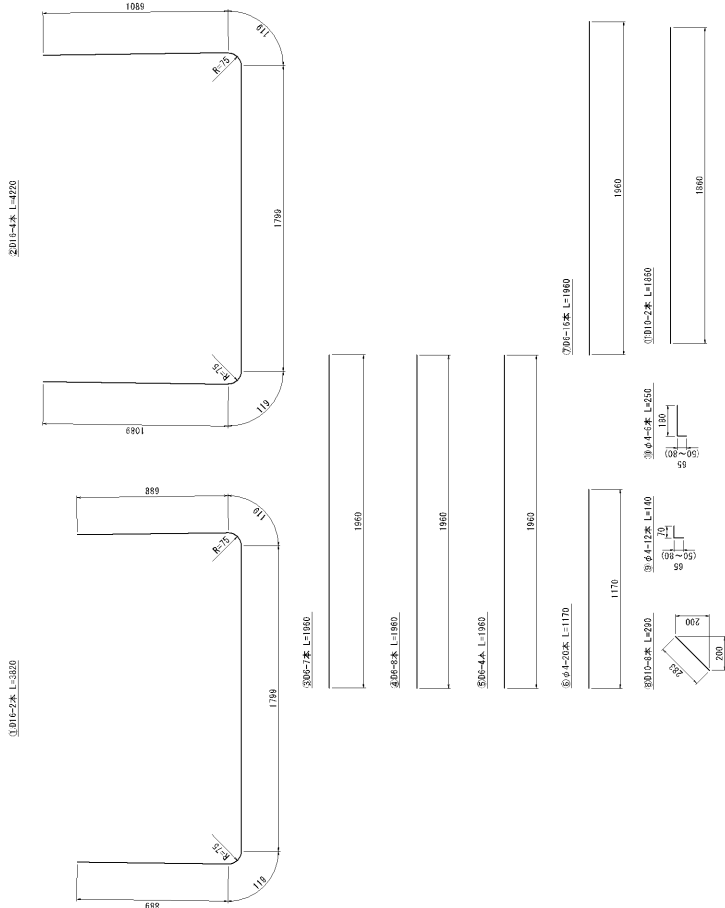


側面図

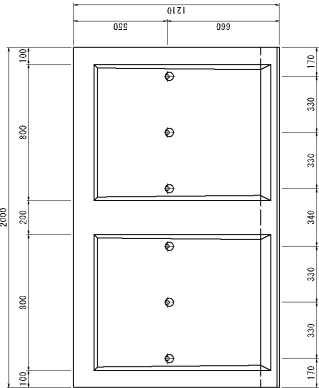

断面図

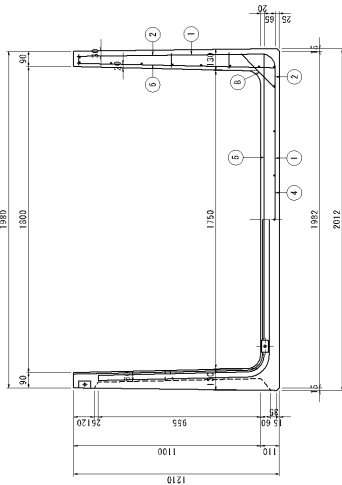

側面図



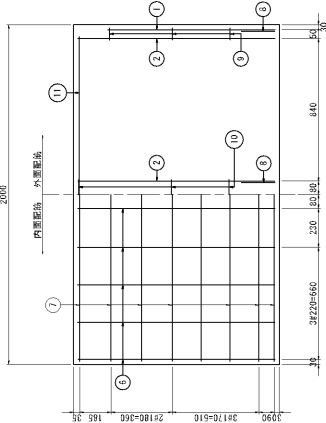


ワイドフレーム H1100xB1900


5115

材料表 (一本当り)	種類	N	0	定	本数 (=)	重量 (kg)	形状	材質
棒	1	016	3600	2	12.20	—	□	S315K1
	2	016	4200	4	26.57	—	□	S315K1
	3	006	1950	7	3.16	—	□	S315K1
	4	006	2650	8	4.104	—	□	S315K1
	5	006	2650	4	2.052	—	□	S315K1
	6	041	1100	20	2.317	—	—	S315K1
	7	006	1950	16	7.809	—	—	S315K1
	8	010	760	8	1.739	—	—	S315K1
	9	041	600	12	0.716	—	—	S315K1
	10	041	250	30	0.361	—	—	S315K1
	11	010	1650	2	2.653	—	—	S315K1
計					62.292			
単位 重量				1359	kg			


材料表 (一本当り)

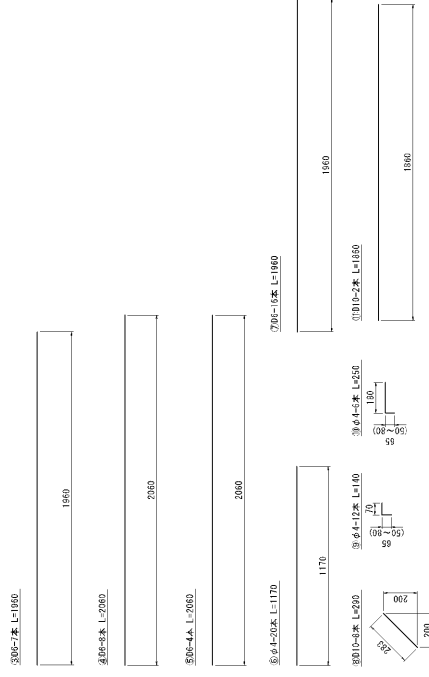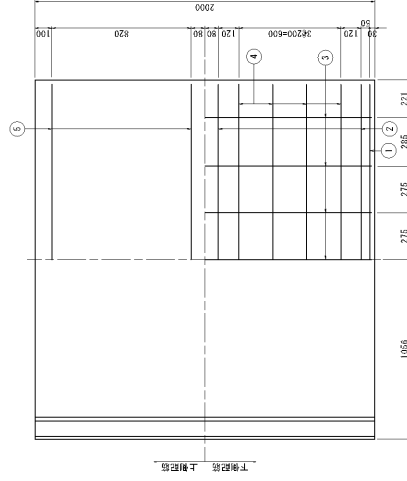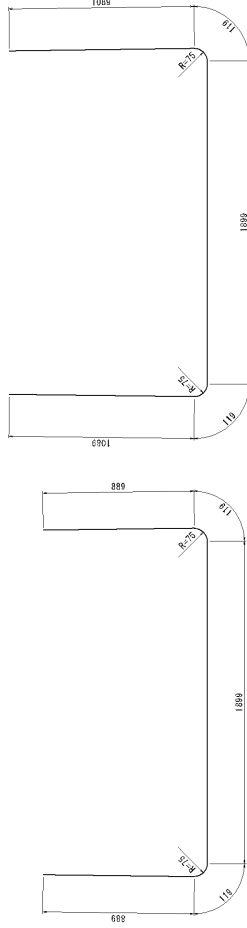


側面圖

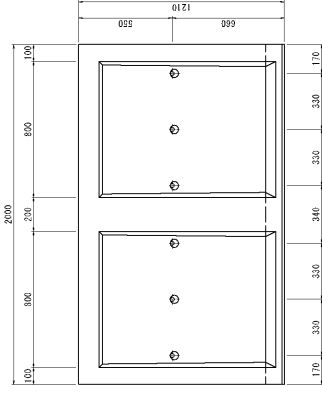

断面图

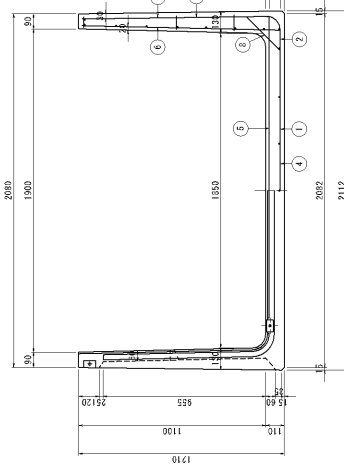

側面図

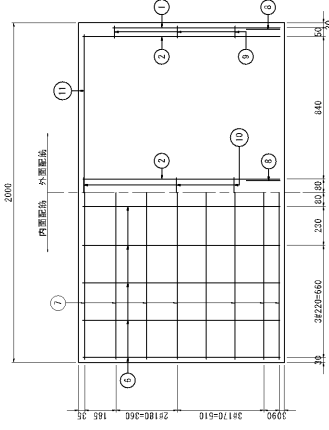


ワイドフレーム H1100xB2000

2-115


材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	4020	2	12.542	□	S1115A
2	D16	4420	4	27.551	□	S1115A
3	B6	1960	8	3.904	—	S1115A
4	B6	2160	8	4.303	—	S1115A
5	B6	2160	4	2.151	—	S2255A
6	φ4	1170	20	2.317	—	S1215A
7	B6	1960	16	7.809	—	S1215A
8	D16	2960	8	1.269	—	S1215A
9	φ4	140	12	0.166	—	S1215A
10	φ4	250	6	0.119	—	S1215A
11	D16	1860	2	2.083	—	S1215A
計				64.304		
製品重量			1911	kg		


平面図

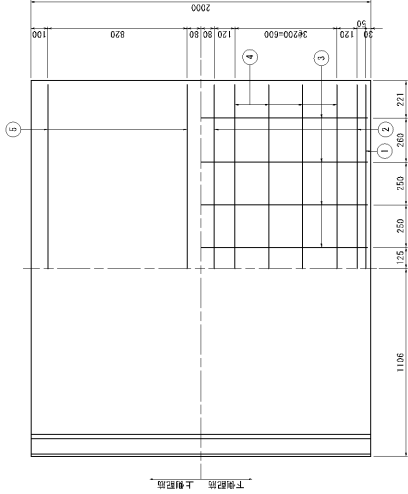


鉄筋加工図

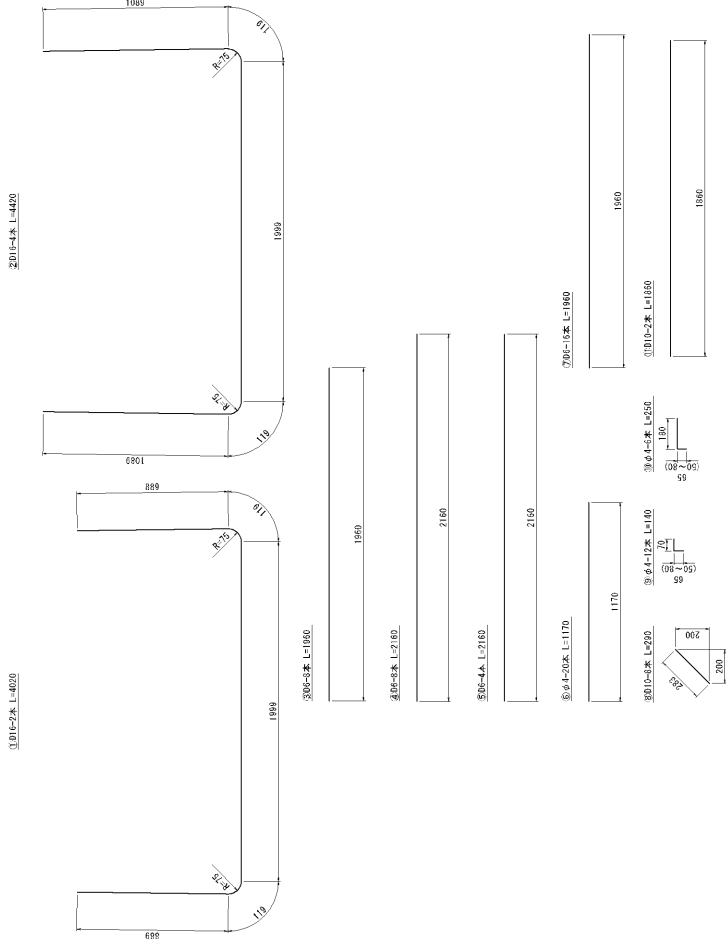


側面図

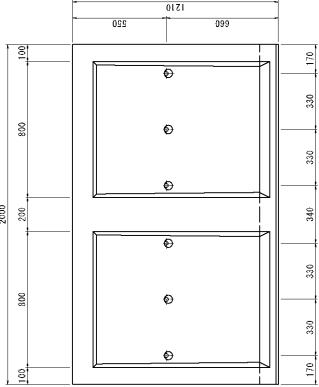

断面図

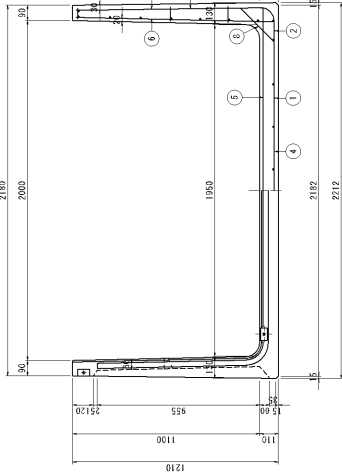

側面図

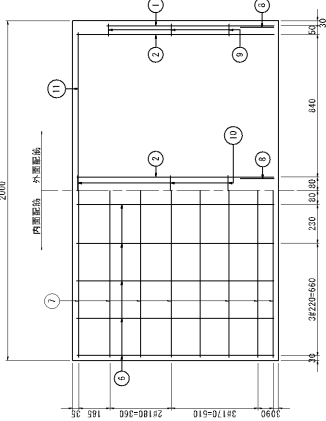


ワイドフレーム H1100xB2100

2-1 15

材料表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	4120	2	12.654	□	S1115A
2	D16	4520	4	28.205	□	S1115A
3	D16	1960	8	6.761	—	S1115A
4	D6	2260	8	4.502	—	S1115A
5	D6	2260	4	2.251	—	S2255A
6	φ4	1170	20	2.317	—	S1215A
7	D6	1960	16	7.809	—	S1215A
8	D16	290	8	1.269	—	S1215A
9	φ4	140	12	0.166	—	S1215A
10	φ4	260	6	0.119	—	S1215A
11	D16	1860	2	2.083	—	S1215A
計				70.416		
製品重量			1863	kg		


平面図

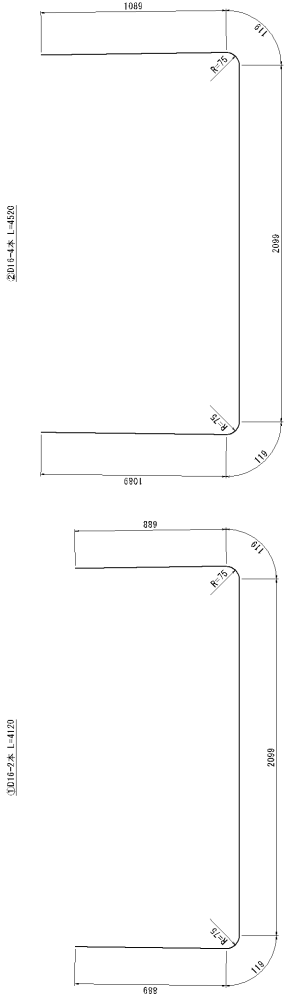

板加工図


2016-4本 L=4520

1016-2本 L=4120

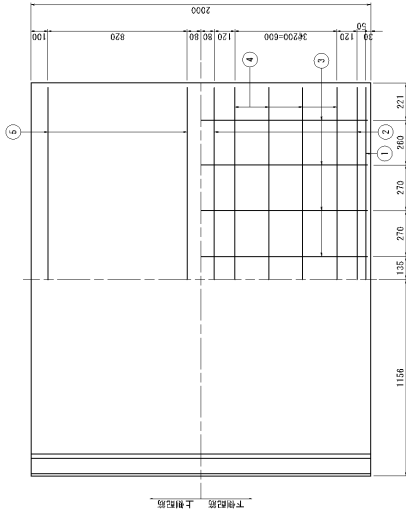


下側配筋 上側配筋


側面図

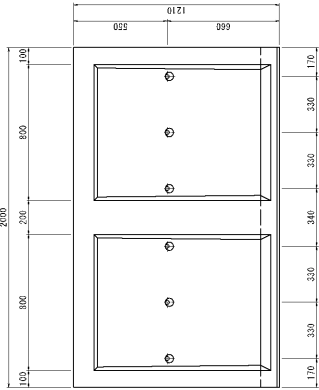

断面図

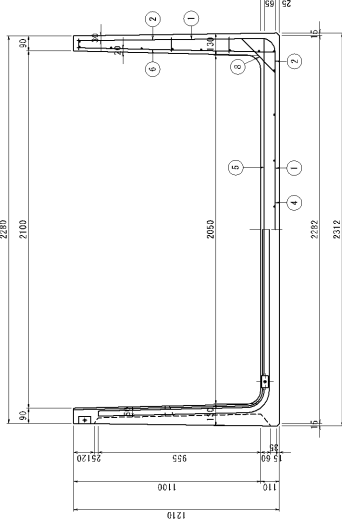

側面図

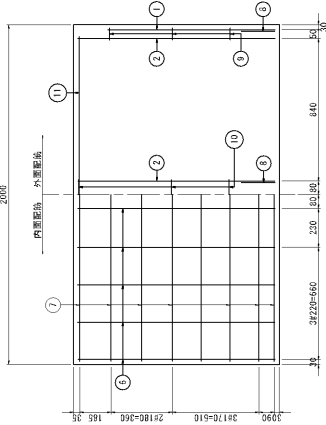

ワイドフレーム H1100xB2200

$$S = 1.15$$

材料表 (一本当り)

測定項目	測定値	単位	公差	検査方法	材料
1	D16	4220	2	13.66	S21215A
2	D16	4620	4	28.69	S21215A
3	D10	1950	8	8.781	S21215A
4	D6	2350	8	7.01	S21215A
5	D6	2350	4	2.251	S22255A
6	54	1170	20	2.317	S21215A
7	D6	1950	16	7.509	S21215A
8	D10	2900	8	1.559	S21215A
9	54	140	12	0.166	S21215A
10	54	2950	6	0.149	S21215A
11	D10	1680	2	2.083	S21215A
計			71.651		

ワイドフレーム H1200xB700

$$S=1:20$$

材料表 (一本当り)

船別	N 号	型	長さ	噸数	形数	行	實
鐵	1	D16	2390	2	9,239	—	S2025A
	2	D16	3330	4	20,779	□	S2025A
	3	D6	1960	3	1,464	□	S2025A
	4	D6	870	8	1,733	—	S2025A
	5	—	—	—	—	—	S2025A
船	6	4	1260	20	2,465	—	S2025A
	7	D6	1860	16	7,359	—	S2025A
	8	D10	300	8	1,344	—	S2025A
	9	4	140	12	6,146	—	S2025A
	10	4	250	5	6,149	—	S2025A
計	11	D10	1860	2	2,033	—	S2025A
	計	—	—	—	47,551	—	—


ワイドフレーム H1200xB800

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 1/c	重量 kg	形状	材質
1	B16	3090	2	9.641	—	U	S225SA
2	B16	3430	4	21.403	—	U	S225SA
3	B6	1800	4	1.897	—	—	S225SA
4	B6	1700	8	1.937	—	—	S225SA
5	—	—	—	—	—	—	—
6	φ4	1700	20	2.495	—	—	S225SA
7	B6	1800	16	7.839	—	—	S225SA
8	B10	3000	8	1.344	—	—	S225SA
9	φ4	1400	12	0.166	—	—	S225SA
10	φ4	2500	6	0.149	—	—	S225SA
11	B10	1800	2	2.053	—	—	S225SA
計					48.974		
総重量			1382	kg			


平面図




縦筋加工図

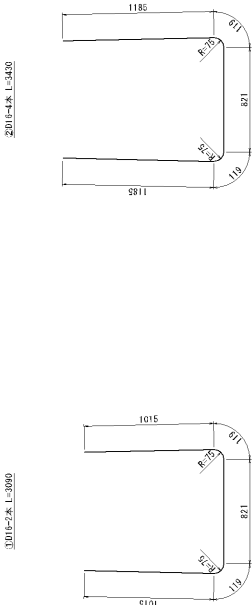


側面図



断面図



側面図




ワイドフレーム H1200×B900

 $S=1:20$


材料表 (一本当り)

船別	N 号	艙名	艙数	数量	形状	材質
船	1	D16	3190	2, 953	—	S2025A
	2	D16	3530	4, 22, 07	—	S2025A
	3	B6	1860	4, 1, 251	—	S2025A
	4	D6	1070	8, 1, 137	—	S2025A
	5	—	—	—	—	S2025A
船	6	A4	1260	20, 2, 465	—	S2025A
	7	B6	1860	16, 7, 339	—	S2025A
	8	D10	300	8, 1, 344	—	S2025A
	9	A4	140	12, 0, 166	—	S2025A
	10	A4	250	6, 0, 149	—	S2025A
	11	D10	1860	2, 2, 033	—	S2025A
計				50, 109		


圖面平




側面図





断面図



側面図



钢筋加工图

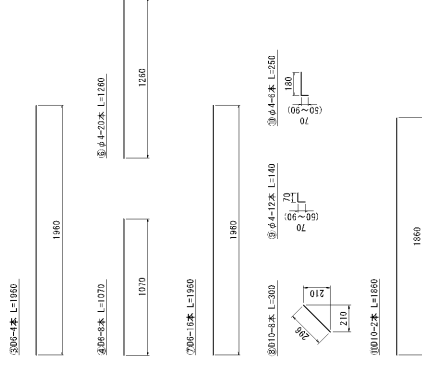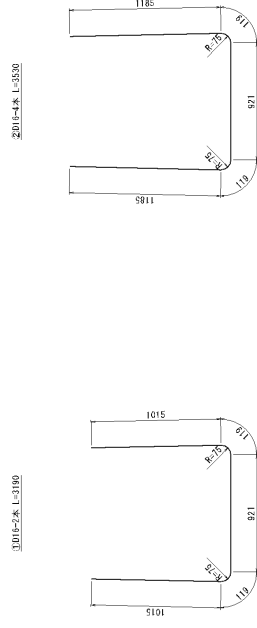


ワイドフレーム H1200xB1000

3-1 10


材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数 (1/c)	重量 (kg)	形状	材質
1	φ16	3290	2	10.265	U	S275SA
2	φ16	3630	4	22.851	U	S275SA
3	φ6	1860	4	1.892	—	S275SA
4	φ6	1170	8	2.331	—	S275SA
5	—	—	—	—	—	—
6	φ4	1260	20	2.495	—	S275SA
7	φ6	1860	16	7.839	—	S275SA
8	φ10	360	8	1.344	—	S275SA
9	φ4	140	12	0.166	—	S275SA
10	φ4	250	6	0.149	—	S275SA
11	φ10	1860	2	2.053	—	S275SA
計				51.245		
総重量			1485 kg			


平面図




縁加工図

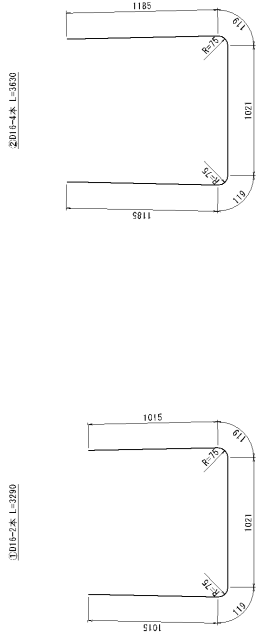


側面図



断面図



側面図




ワイドフレーム H1200xB1100

3=1 20


材料表 (一本当り)

番号	規格	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	816	3390	2	10.577	□	S225A
	2	816	3730	4	23.275	□	S225A
	3	86	1800	6	2.440	□	S225A
	4	86	1770	8	2.530	□	S225A
	5	—	—	—	—	—	—
鋁	6	84	1760	20	2.495	—	S225A
	7	86	1860	16	7.539	—	S225A
	8	810	390	8	1.344	—	S225A
	9	84	140	12	0.166	—	S225A
	10	84	250	6	0.149	—	S225A
	11	810	1860	2	2.093	—	S225A
計						52.889	
部品重量						1537	kg


平面図




縁加工図

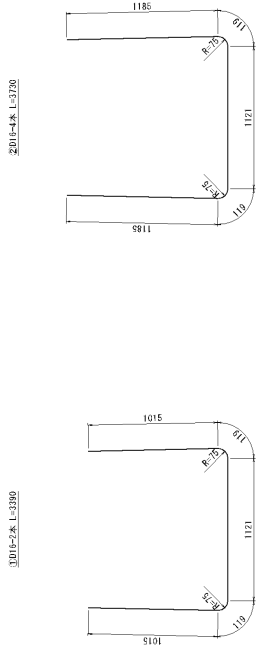


側面図



断面図



側面図



ワイドフレーム H1200xB1200

S=1:20

材料表 (一本当り)

類別	N°	型	根	本數	數量	形狀	實 行 費
鐵	1	D16	3490	2	10,539	—	S2025A
	2	D16	3330	4	23,359	—	S2025A
	3	D6	1960	5	2,140	—	S2025A
	4	D6	1370	8	2,739	—	S2025A
	5	—	—	—	—	—	S2025A
鉛	6	D4	1260	20	2,465	—	S2025A
	7	D8	1860	16	7,359	—	S2025A
	8	D10	300	8	1,344	—	S2025A
	9	D4	140	12	0,166	—	S2025A
	10	D4	250	6	0,149	—	S2025A
	11	D10	1860	2	2,033	—	S2025A
計						54,650	

ワイドフレーム H1200xB1300

$$S=1:20$$

材料表 (一本当り)

船名	N°	型	長	噸數	數量	形狀	實	行
			(m)		kg		實	實
鐵	1	D16	3590	2	11,201	—	—	S2025A
	2	D16	3930	4	24,523	—	—	S2025A
	3	B6	1860	5	2,440	—	—	S2025A
	4	D6	1470	6	2,928	—	—	S2025A
	5	—	—	—	—	—	—	S2025A
船	6	A4	1260	20	2,465	—	—	S2025A
	7	B6	1860	16	7,359	—	—	S2025A
	8	D10	3000	8	1,344	—	—	S2025A
	9	A4	140	12	0,166	—	—	S2025A
	10	A4	2500	6	6,149	—	—	S2025A
計	11	D10	1860	2	2,053	—	—	S2025A
	計				55,129			


ワイドフレーム H1200xB1400

3-1 10


材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3000	2	U	S275SA
2	φ16	4030	4	U	S275SA
3	φ6	1800	6	—	S275SA
4	φ6	1570	8	—	S275SA
5	—	—	—	—	—
6	φ4	1760	20	—	S275SA
7	φ6	1860	16	—	S275SA
8	φ10	300	8	—	S275SA
9	φ4	140	12	—	S275SA
10	φ4	250	6	—	S275SA
11	φ10	1860	2	—	S275SA
計					
総重量			1682 kg		


平面図




縁加工図

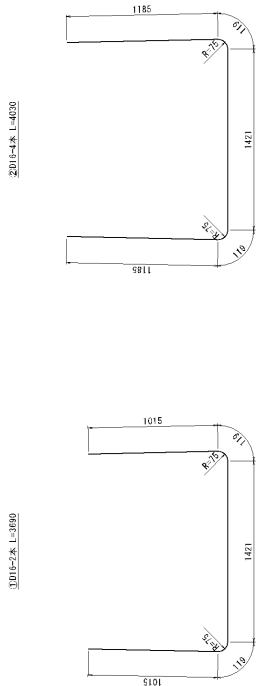


300φ-2本 L=1050



200φ-8本 L=1570



200φ-1本 L=1050



800φ-3本 L=300




φ64-12本 L=140




φ64-2本 L=250




200φ-2本 L=1860




側面図



断面図



側面図




ワイドフレーム H1200xB1500

3-1 10

材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	3790	2	11.615	U	S275SA
2	φ16	4130	4	25.771	U	S275SA
3	φ6	1800	6	2.828	—	S275SA
4	φ6	1870	8	3.827	—	S275SA
5	—	—	—	—	—	—
6	φ4	1760	20	2.495	—	S275SA
7	φ6	1860	16	7.839	—	S275SA
8	φ10	300	8	1.344	—	S275SA
9	φ4	140	12	0.168	—	S275SA
10	φ4	250	6	0.149	—	S275SA
11	φ10	1860	2	2.103	—	S275SA
計				51.897		
総重量			1743	kg		



平面図




縦筋加工図

300φ-2本 L=3790



200φ-4本 L=4130




300φ-2本 L=1960



200φ-8本 L=1870



200φ-1本 L=1960



800φ-3本 L=309




800φ-12本 L=140




800φ-4本 L=256




300φ-2本 L=1860




側面図



断面図



側面図




ワイドフレーム H1200xB1600

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 (1/c)	形状	材質
鉄	1	Ø16	3890	2	12.137	S225A
	2	Ø16	4230	4	26.395	S225A
	3	Ø6	1800	6	2.828	S225A
	4	Ø6	1770	8	3.526	S225A
	5	-	-	-	-	-
鋁	6	Ø4	1760	20	2.495	S225A
	7	Ø6	1860	16	7.839	S225A
	8	Ø10	300	8	1.344	S225A
	9	Ø4	140	12	0.166	S225A
	10	Ø4	250	6	0.149	S225A
	11	Ø10	1860	2	2.053	S225A
計					59.622	
総重量			1785	kg		


平面図




側面図



断面図




側面図




縁加工図

300φ-2本 L=3890





200φ-4本 L=4230




300φ-2本 L=1960



200φ-8本 L=1770



200φ-1本 L=1960



800φ-3本 L=309




800φ-12本 L=140



800φ-4本 L=256



300φ-2本 L=1860








ワイドフレーム H1200xB1700


 $s=1:20$

材料表 (一本当り)	種別	N ₀	径	長さ	重量 (kg)	形状	材質
軸	1	106	3940	2	12.49	□	S202SA
	2	106	4330	4	27.019	□	S202SA
	3	108	1960	7	3.416	—	S202SA
	4	108	1870	8	3.75	—	S202SA
	5	6	1040	140	2.495	—	S202SA
脂	7	108	1960	16	7.039	—	S202SA
	8	102	300	8	1.344	—	S202SA
	9	84	140	12	0.188	—	S202SA
	10	84	250	6	0.149	—	S202SA
	11	102	1960	2	2.033	—	S202SA
計							54.544
重量合計				15.87			


材料表 (一本当り)

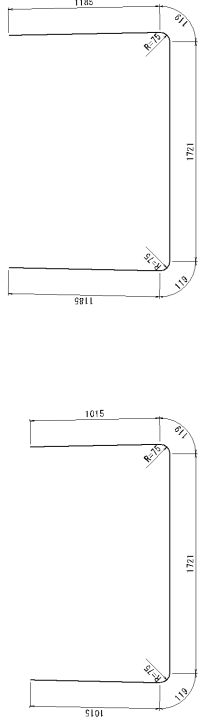


側面図



断面図



側面図




ワイドフレーム H1200xB1800

S=1:20


材料表 (一本当り)

類別	N 0 型	限 定	數量	形狀	實 價	
			次數	kg		
鐵 板	1	D 6	4090	2	12.761	S2025A
	2	D 6	4390	4	27.643	S2025A
	3	D 6	1960	7	3.416	S2025A
	4	D 6	1960	8	3.924	S2025A
	5	D 10	1970	4	4.413	S2025A
	6	D 4	1260	20	2.495	S2025A
	7	D 6	1960	16	7.939	S2025A
	8	D 10	300	8	1.344	S2025A
	9	5.4	140	12	0.166	S2025A
	10	5.4	250	6	0.149	S2025A
	11	D 10	1860	2	2.033	S2025A
計					56.265	


平面图

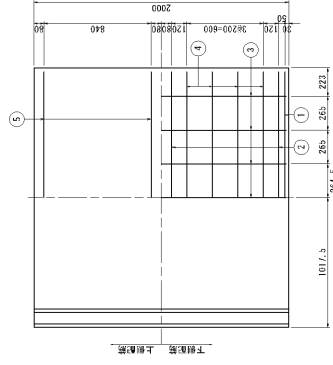


側面図




断面図

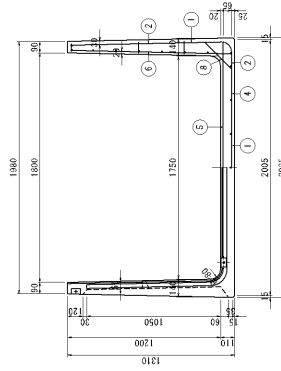


側面図




钢筋加工图

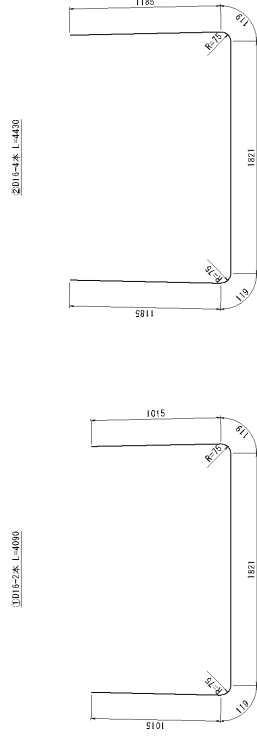


③06-7本 L=1060



④06-8本 L=1970




5010-4A L=1970



706-16本 L=1960



01010-2本 L=1860



⑨φ4-12本 L=140







⑧D10-8本 L=300




ワイドフレーム H1200xB1900

 $S=1:20$ [illegible]


材料表 (一本当り)

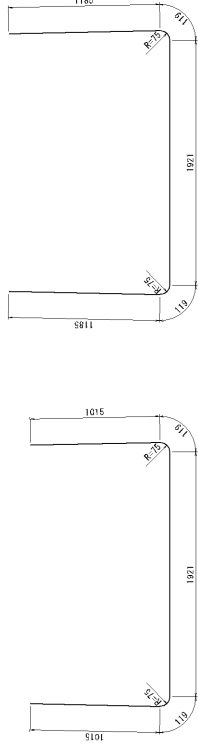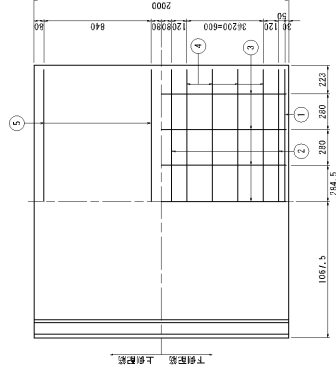


側面図



断面図

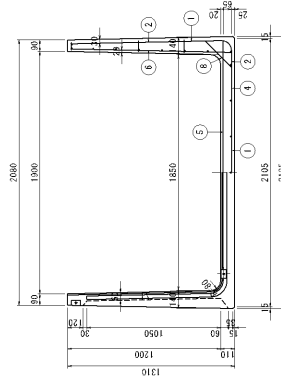

側面図





ワイドフレーム H1200xB2000

3-1 10

材料表 (一本当り)

番号 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	4790	2	13.355	U	S275SA
2	φ16	4630	4	25.891	U	S275SA
3	φ6	1800	8	3.934	—	S275SA
4	φ6	2170	8	4.523	—	S275SA
5	φ10	2170	4	4.561	—	S275SA
6	φ4	1760	20	2.495	—	S275SA
7	φ6	1800	16	7.839	—	S275SA
8	φ10	300	8	1.344	—	S275SA
9	φ4	140	12	0.166	—	S275SA
10	φ4	250	6	0.149	—	S275SA
11	φ10	1800	2	2.053	—	S275SA
計				59.410		
部品重量			2002	kg		

平面図

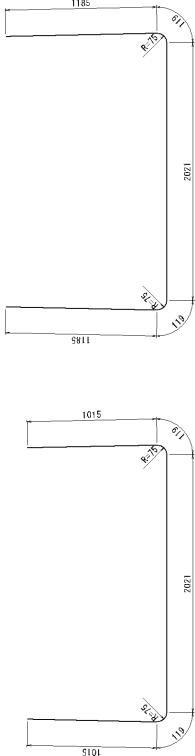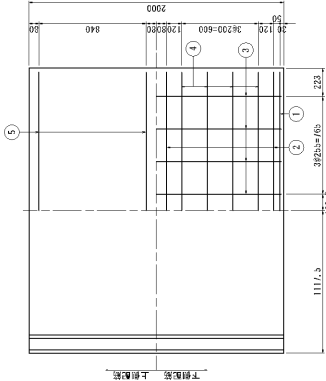


300φ-2本 L=4990


200φ-4本 L=4630

縦筋加工図


側面図



断面図

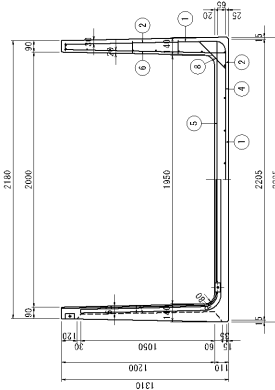

側面図





ワイドフレーム H1200xB2100

3=1 20


材料表 (一本当り)

番号	N.º	径	長さ	本数	重量	形状	材質
1	B16	4390	2	13.697	9325A	U	9325A
2	B16	4730	4	28.515	9325A	U	9325A
3	B6	1800	8	3.934	9325A	—	9325A
4	B6	2770	8	4.527	9325A	—	9325A
5	B10	2770	4	5.035	9325A	—	9325A
6	φ4	1760	20	2.495	9325A	—	9325A
7	B6	1800	16	7.839	9325A	—	9325A
8	B10	300	8	1.344	9325A	—	9325A
9	φ4	140	12	0.168	9325A	—	9325A
10	φ4	250	6	0.149	9325A	—	9325A
11	B10	1800	2	2.033	9325A	—	9325A
計					70.799		
部品重量			2054	kg			


平面図

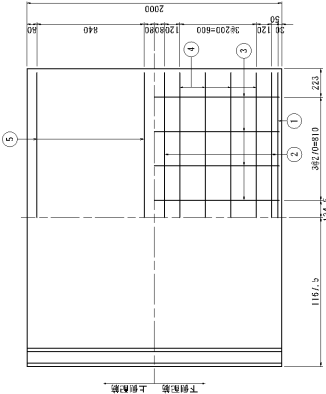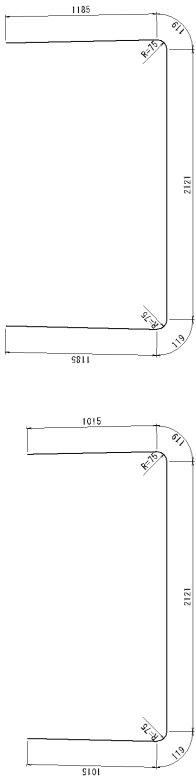


300φ-3本 L=1950



200φ-8本 L=2770




200φ-4本 L=2770



100φ-20本 L=1260



70φ-16本 L=1660



80φ-3本 L=300

9.8φ-12本 L=140

6.8φ-9本 L=180

5.8φ-7本 L=180

4.8φ-5本 L=180

3.8φ-3本 L=180

2.8φ-2本 L=180

1.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180

0.8φ-1本 L=180


0.8φ-1本 L=180

0.8φ-1本 L=180


0.8φ-1本 L=180

0.8φ-1本 L=180


側面図



断面図

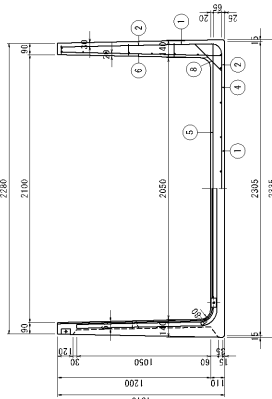

側面図



縁加工図


300φ-2本 L=4390

200φ-4本 L=4720


ワイドフレーム H1200xB2200

S=1:20

鉄筋加工図

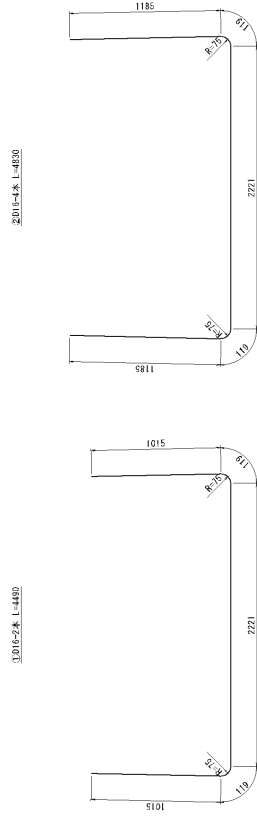


圖面平

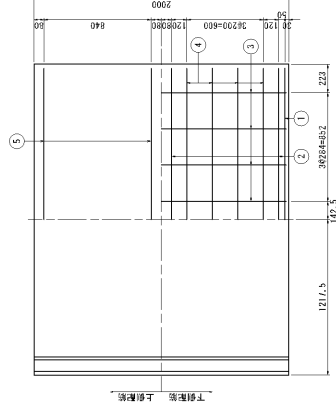


材料表 (一本当り)


船名	N°	型	長 (m)	噸數	數量	形狀	實 行 時 間
鐵	1	D16	4490	2	40,109	—	S2025A
	2	D16	4330	4	30,139	□	S2025A
	3	B6	1960	8	3,934	—	S2025A
	4	B6	2370	8	4,721	—	S2025A
	5	D10	2370	4	5,359	—	S2025A
船	6	A4	1260	20	2,465	—	S2025A
	7	B6	1960	16	7,939	—	S2025A
	8	D10	3000	8	1,344	—	S2025A
	9	A4	1450	12	0,166	—	S2025A
	10	A4	2500	5	0,149	—	S2025A
	11	D10	1860	2	2,033	—	S2025A
計							32,129

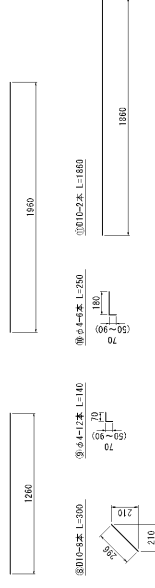


側面図



断面図

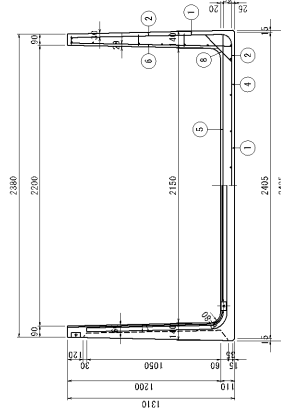

側面図




ワイドフレーム H1200xB2300

3-1 10

材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	B16	4500	2	14.321		□	S275SA
2	B16	4500	4	30.783		□	S275SA
3	B6	1800	9	4.339		—	S275SA
4	B6	2400	8	4.339		—	S275SA
5	B10	2400	4	5.533		—	S275SA
6	φ4	1200	20	2.495		—	S275SA
7	B6	1800	16	7.839		—	S275SA
8	B10	3000	8	1.344		—	S275SA
9	φ4	1400	12	0.168		—	S275SA
10	φ4	2500	6	0.149		—	S275SA
11	B10	1800	2	2.103		—	S275SA
計					73.975		
部品重量			2157	kg			

平面図

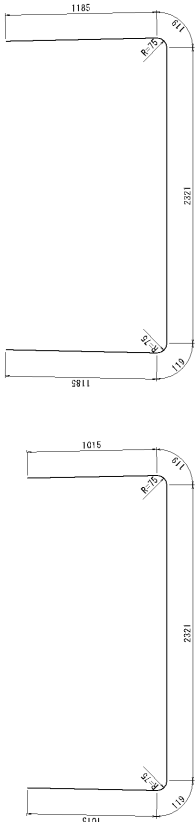

2006-2mm L=1050

1940

2470

2470


2470

1260


1980

1000


側面図



断面図

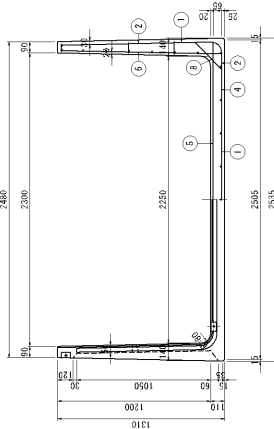

側面図




ワイドフレーム H1200xB2400

3-1 10

鉄筋加工図

①D16-2本 L=4600


2D16-4本 L=5030

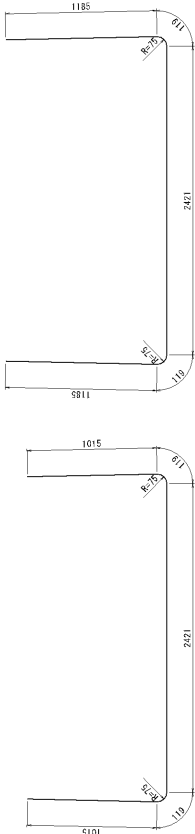

平面図

材料表 (一本当り)

番号	規格	長さ (mm)	断面 (mm ²)	本数	重量 (kg)	形状	材質
鉄	1	D16	4890	2	14.633	□	S235SA
	2	D16	5030	4	31.387	□	S235SA
	3	D6	1860	9	4.397	—	S235SA
	4	D6	2570	8	5.119	—	S235SA
	5	D10	2570	4	5.757	—	S235SA
鋁	6	φ4	1260	20	2.495	—	S235SA
	7	D6	1860	16	7.839	—	S235SA
	8	D10	300	8	1.344	—	S235SA
	9	φ4	140	12	0.166	—	S235SA
	10	φ4	250	6	0.149	—	S235SA
	11	D10	1860	2	2.103	—	S235SA
計					75.534		
品名					2209	kg	

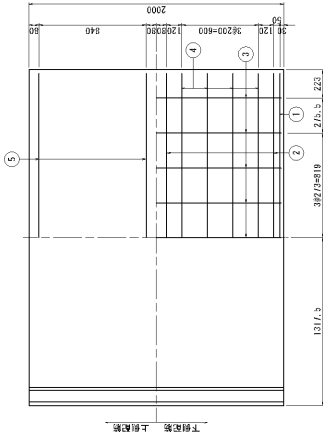

300φ-2本 L=1950

1940

200φ-8本 L=2570

2570

200φ-4本 L=2570

2570

200φ-20本 L=1260

1260

200φ-16本 L=1890

1890

200φ-4本 L=250

250

200φ-2本 L=1800

1800


200φ-2本 L=1800

1800


200φ-2本 L=1800

1800


側面図



断面図

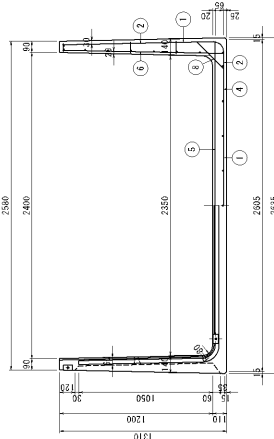

側面図






ワイドフレーム H1300xB800

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数 1/cd	数量 1/cd	形状	材質
鉄	1	φ16	3700	2	9.884	┐	S225SA
	2	φ16	3620	4	22.859	┐	S225SA
	3	φ10	1800	3	3.793	—	S225SA
	4	φ10	800	6	3.175	—	S225SA
	5	—	—	—	—	—	—
鋁	6	φ4	1300	20	2.712	—	S225SA
	7	φ10	1860	16	17.892	—	S225SA
	8	φ10	360	8	1.813	—	S225SA
	9	φ4	150	12	0.178	—	S225SA
	10	φ4	260	6	0.154	—	S225SA
	11	φ10	1860	2	2.053	—	S225SA
	—	—	—	—	—	—	—
計				—	53.713	—	—
総重量				1547	kg	—	—


平面図

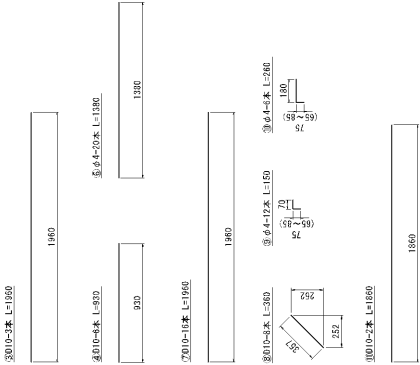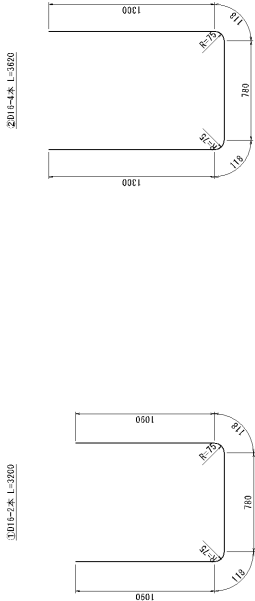


側面図



断面図



側面図



鋳造加工図

3000-2本 L=1900

2000-4本 L=3620

2000-4本 L=3620


ワイドフレーム H1300xB900

3-1 10


材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数 (1/c)	形状	材質
1	φ16	3300	2	□	S225SA
2	φ16	3720	4	□	S225SA
3	φ10	1800	3	—	S225SA
4	φ10	1000	6	—	S225SA
5	—	—	—	—	—
6	φ4	1300	20	2.722	S225SA
7	φ10	1800	16	17.682	S225SA
8	φ10	360	8	1.612	S225SA
9	φ4	150	12	0.178	S225SA
10	φ4	260	6	0.154	S225SA
11	φ10	1800	2	2.103	S225SA
計					54.535
総重量			1606	kg	


平面図




縦加工図

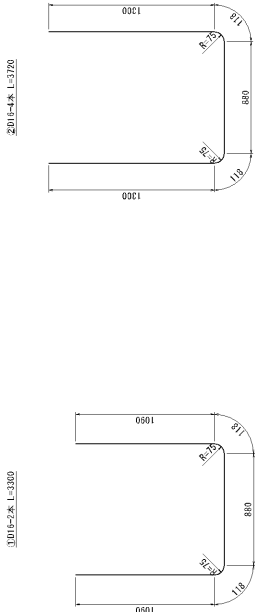


側面図



断面図



側面図







ワイドフレーム H1300xB1000


S=1:20

材料表 (一本当り)


類別	N 0 型	限 定	數量	形狀	實 價
鐵 板	1	D 6	3400	2	10.008
	2	D 6	3800	4	23.537
	3	D 10	1860	4	4.390
	4	D 10	1190	6	3.797
	5	—	—	—	—
鋁 板	6	5 4	1380	20	2.732
	7	D 10	1860	16	17.482
	8	D 10	3900	8	4.113
	9	5 4	150	12	0.178
	10	5 4	260	6	0.154
計	11	D 10	1860	2	2.033
計					56.954

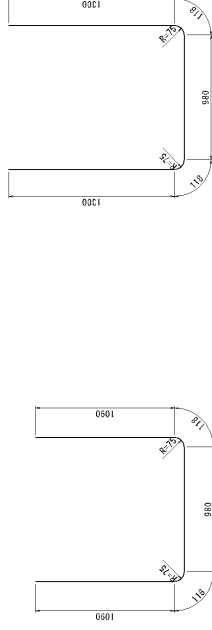


側面図



断面図



側面図




ワイドフレーム H1300xB1100


5=1:20

材料表 (一本当り)


類別	N	型	長	之	數量	形狀	材質
鐵	1	D16	5500	2	10,200	—	S2025A
	2	D16	3300	4	24,611	U	S2025A
	3	D16	3300	4	24,611	U	S2025A
	4	D10	1660	4	4,130	—	S2025A
	5	D10	1200	6	4,133	—	S2025A
	6	D10	1200	6	4,133	—	S2025A
	7	D10	1200	6	4,133	—	S2025A
	8	D10	1200	6	4,133	—	S2025A
	9	D10	1200	6	4,133	—	S2025A
	10	D10	1200	6	4,133	—	S2025A
	11	D10	1660	2	2,053	—	S2025A
計							55,526




平面图

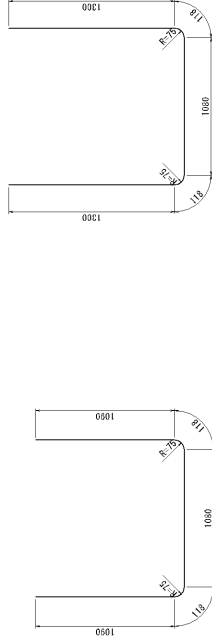


钢筋加工图

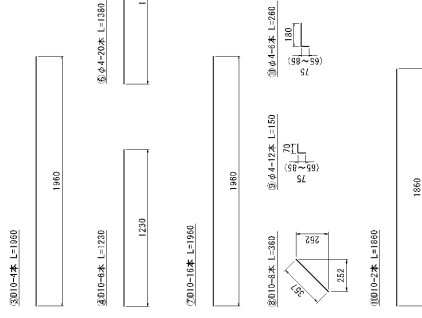


側面図



断面図



側面図




ワイドフレーム H1300xB1200


 $s=1:20$

材料表 (一本当り)


類別	N°	型	長	寬	本數	數量	形狀	材質
鐵	1	B16	3000	2	11,732	—	□	S2025A
	2	B16	4200	4	25,055	—	□	S2025A
	3	B10	1600	4	4,390	—	—	S2025A
	4	D10	1300	6	4,469	—	—	S2025A
	5	—	—	—	—	—	—	—
	6	A4	1300	20	2,732	—	—	S2025A
	7	D10	1600	16	17,482	—	—	S2025A
	8	B10	300	8	1,815	—	—	S2025A
	9	A4	150	12	0,178	—	—	S2025A
	10	A4	260	6	0,154	—	—	S2025A
	11	D10	1600	2	2,053	—	—	S2025A
計					53,449			
合計					1392			




平面图

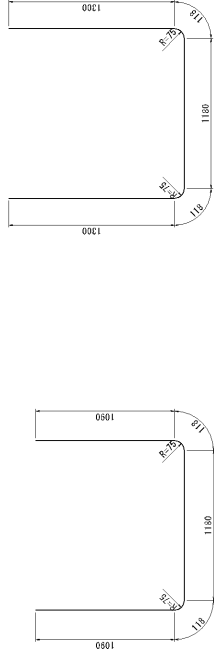


鉄筋加工図

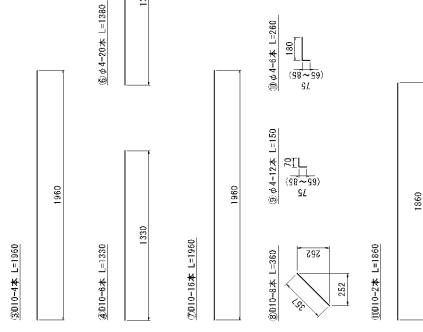


側面図



断面図




側面圖




ワイドフレーム H1300xB1300

3=120

総加工図

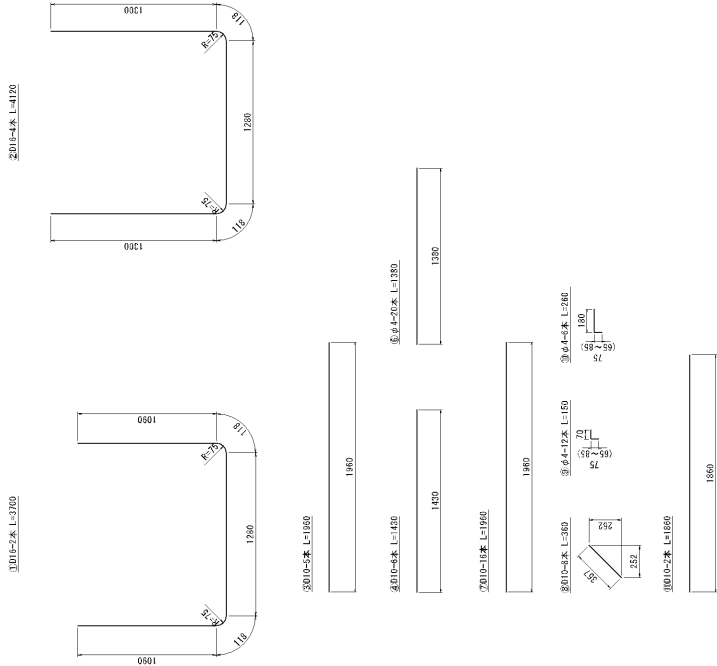


平面図




材料表 (一本当り)

部材 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	3700	2	11.544	U	SUS304
2	φ16	4120	4	25.739	U	SUS304
3	φ10	1800	6	5.488	—	SUS304
4	φ10	1400	6	4.855	—	SUS304
5	—	—	—	—	—	—
6	φ4	1300	20	2.722	—	SUS304
7	φ10	1800	16	17.882	—	SUS304
8	φ10	360	8	1.813	—	SUS304
9	φ4	150	12	0.178	—	SUS304
10	φ4	260	6	0.154	—	SUS304
11	φ10	1800	2	2.053	—	SUS304
計				71.588		
総重量			1841	kg		


側面図



断面図



側面図




ワイドブリューム H1300xB1400

 $s=1:20$

钢筋加工图

①016-2本 L=3800


2016-4本 L=4220

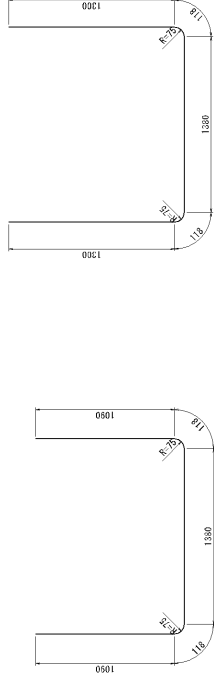


圖書




類別	N°	型	長	寬	本數	數量	形狀	材質
板	1	B6	3000	2	11,550	—	□	S205SA
	2	B6	4220	4	26,333	—	□	S205SA
	3	B0	1660	5	4,488	—	—	S205SA
	4	B0	1500	6	5,141	—	—	S205SA
	5	—	—	—	—	—	—	—
管	6	B4	1380	20	2,732	—	—	S205SA
	7	B0	1660	16	17,482	—	—	S205SA
	8	B0	300	8	1,813	—	—	S205SA
	9	B4	150	12	0,178	—	—	S205SA
	10	B4	260	6	0,154	—	—	S205SA
	11	B0	1660	2	2,053	—	—	S205SA
計								33,440
單位：mm								kg




下側配筋 上側配筋

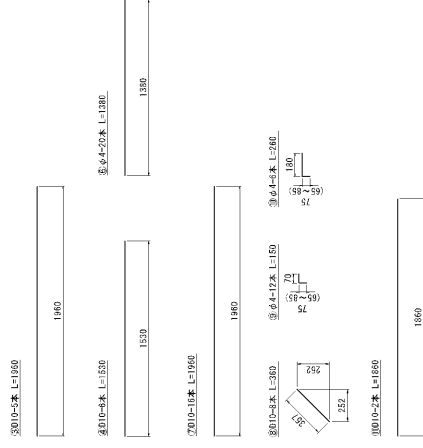


側面図



断面図



側面図




ワイドフレーム H1300xB1500


5=1:20

材料表 (一本当り)


類別	N°	型	長	寬	厚度	形狀	材質
鐵	1	D16	3800	2	12,169	□	S2025A
	2	D16	4230	4	26,357	□	S2025A
	3	D10	1660	5	5,458	—	S2025A
	4	D10	1630	6	5,477	—	S2025A
	5	—	—	—	—	—	—
	6	D4	1380	20	2,732	—	S2025A
	7	D10	3600	16	17,452	—	S2025A
	8	D10	360	8	1,813	—	S2025A
	9	D4	150	12	0,178	—	S2025A
	10	D4	260	6	0,154	—	S2025A
	11	D10	1660	2	2,053	—	S2025A
計							34,412




平面图

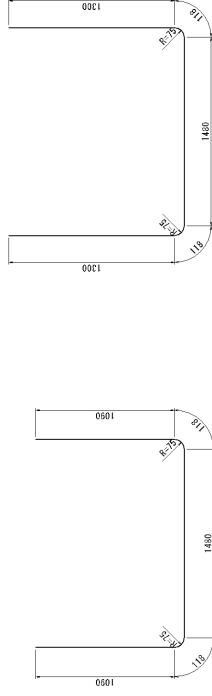


鉄筋加工図

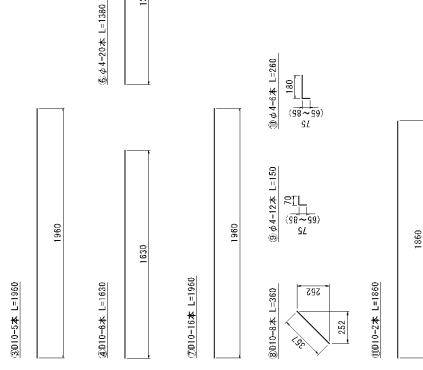


側面図



断面図

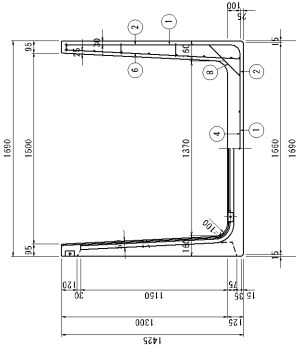

側面図




ワイドフレーム H1300xB1700

3-1 10


材料表 (一本当り)

部材 No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	4100	2	12.792	┐┐	S225SA
2	φ16	4520	4	25.205	┐┐	S225SA
3	φ10	1800	6	6.558	—	S225SA
4	φ10	1830	6	6.149	—	S225SA
5	—	—	—	—	—	—
6	φ4	1390	20	2.722	—	S225SA
7	φ10	1860	16	17.582	—	S225SA
8	φ10	360	8	1.513	—	S225SA
9	φ4	150	12	0.178	—	S225SA
10	φ4	260	6	0.154	—	S225SA
11	φ10	1860	2	2.103	—	S225SA
計				78.654		
総重量			2076	kg		


平面図




側面図



断面図

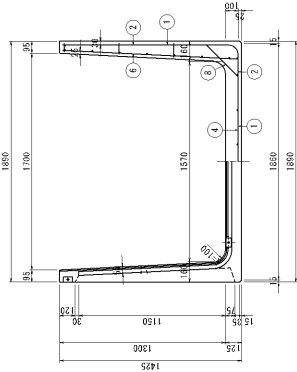


側面図




縁加工図

300φ×2本 L=4100




200φ×4本 L=4520



300φ×2本 L=1940



200φ×4本 L=1580



200φ×2本 L=1940



300φ×2本 L=380




300φ×2本 L=150



300φ×2本 L=380



300φ×2本 L=1580




ワイドフレーム H1300xB1900

3-1 10


材料表 (一本当り)

番号	N.º	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	4400	2	13.728	□	S225A
	2	φ16	4820	4	30.077	□	S225A
	3	φ10	1800	7	7.683	□	S225A
	4	φ10	2000	6	6.821	□	S225A
	5	φ10	2000	4	4.547	□	S225A
鋁	6	φ4	1300	20	2.722	□	S225A
	7	φ10	1800	16	17.682	□	S225A
	8	φ10	360	8	1.613	□	S225A
	9	φ4	150	12	0.178	□	S225A
	10	φ4	260	6	0.154	□	S225A
	11	φ10	1800	2	2.053	□	S225A
計					82.178		
総重量				2184	kg		


平面図

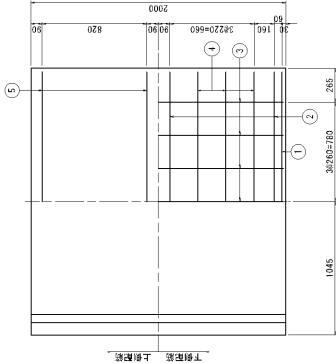


側面図




断面図

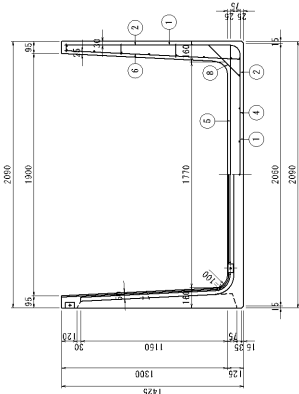

側面図



縁加工図

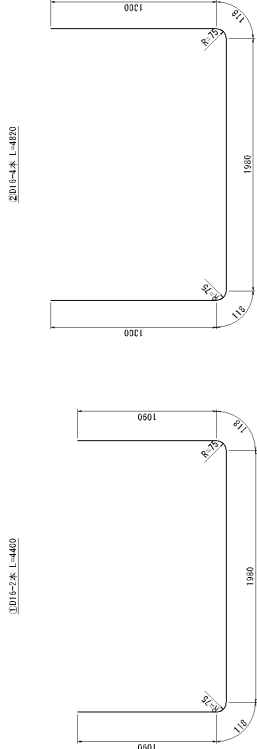


ワイドフレーム H1300xB2000

5=1:20


材料表 (一本当り)

類別	N°	型	尺 碼	數 量	形 狀	實 價
襪	1	B 6	40/50	2	14.40	\$2025A
	2	B 6	42/50	4	30.70	\$2025A
	3	B 6	42/50	7	7.83	\$2025A
	4	B 0	21/30	6	7.157	\$2025A
	5	B 0	21/30	4	4.711	\$2025A
襪	6	B 4	13/20	2	7.72	\$2025A
	7	B 0	16/60	16	17.832	\$2025A
	8	B 0	30/50	8	1.413	\$2025A
	9	B 4	15/50	12	0.178	\$2025A
	10	B 4	26/50	6	0.154	\$2025A
	11	B 0	16/60	2	2.033	\$2025A
計					35.574	


平面图

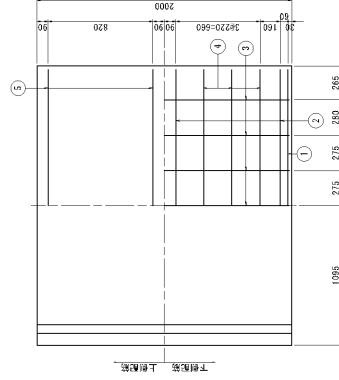


側面図




断面図

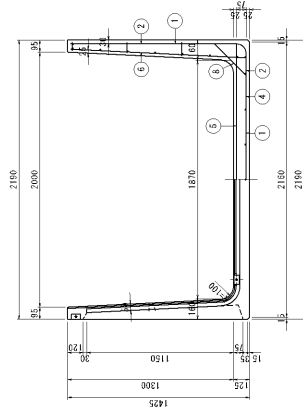


側面図



鉄筋加工図

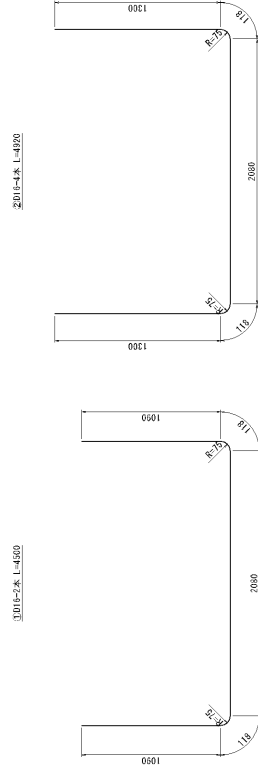


側面図



ワイドフレーム H1300xB2100

3-1 10


総加工図

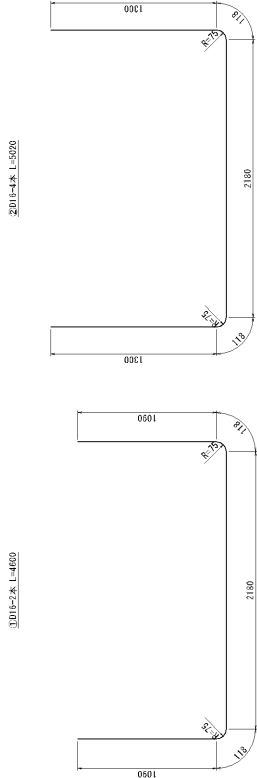


材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	φ16	4600	2	14.592	□	S275A
2	φ16	5020	4	31.335	□	S275A
3	φ10	1800	8	5.781	□	S275A
4	φ10	2720	6	7.493	□	S275A
5	φ10	2720	4	4.995	□	S275A
6	φ4	1300	20	2.722	□	S275A
7	φ10	1800	16	17.682	□	S275A
8	φ10	360	8	1.613	□	S275A
9	φ4	150	12	0.178	□	S275A
10	φ4	260	6	0.154	□	S275A
11	φ10	1800	2	2.053	□	S275A
計				91.589		
総重量			2311 kg			


平面図

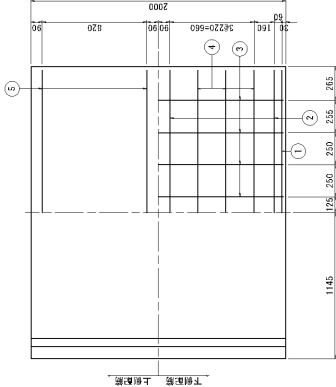


側面図



断面図

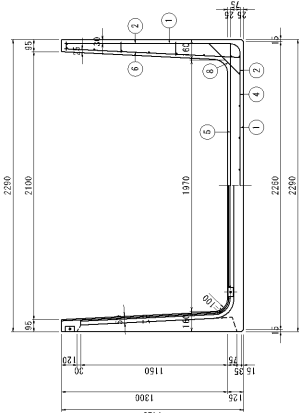

側面図




ワイドフレーム H1300xB2200

3-1 10

鉄筋加工図

①00c-2本 L=4700


200c-4本 L=5120

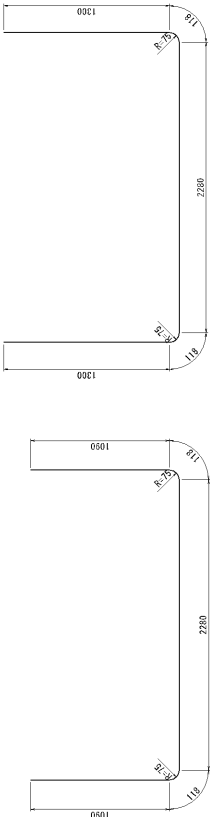

平面図


材料表 (一本当り)

棒筋 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	Ø16	4700	2	14.664	□	S225A
2	Ø16	5120	4	31.648	□	S225A
3	Ø10	1800	8	5.781	□	S225A
4	Ø10	2300	6	7.619	□	S225A
5	Ø10	2300	4	5.719	□	S225A
6	Ø4	1300	20	2.712	□	S225A
7	Ø10	1800	16	17.682	□	S225A
8	Ø10	360	8	1.613	□	S225A
9	Ø4	150	12	0.178	□	S225A
10	Ø4	260	6	0.154	□	S225A
11	Ø10	1800	2	2.053	□	S225A
計				92.764		
総重量			2370	kg		

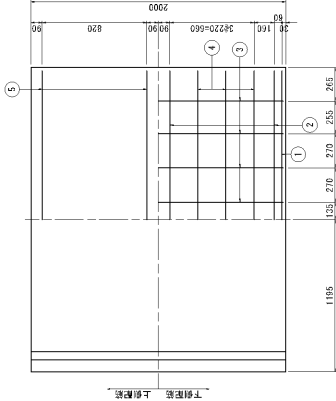


平面図


側面図



断面図

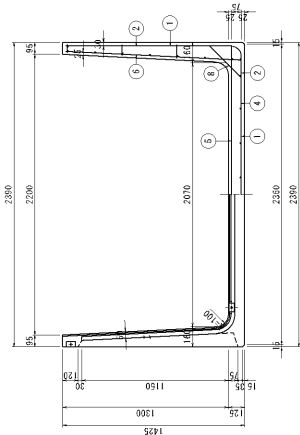

側面図




ワイドフレーム H1300xB2300

3-1 10

鉄筋加工図

①D10-2本 L=4800


2D10-4本 L=5220

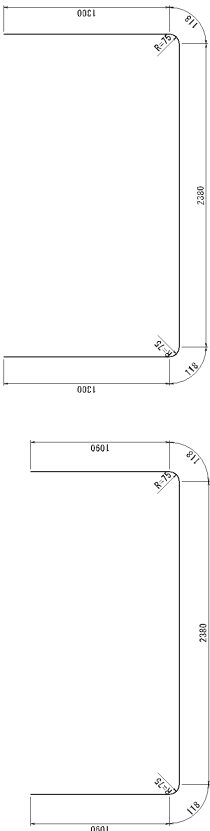


平面図

材料表 (一本当り)


棒筋 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	D16	4800	2	14.578	□	S225A
2	D16	5220	4	32.573	□	S225A
3	D10	1800	8	8.781	—	S225A
4	D10	2400	6	8.165	—	S225A
5	D10	2400	4	5.443	—	S225A
6	φ4	1300	20	2.722	—	S225A
7	D10	1800	16	17.582	—	S225A
8	D10	360	8	1.513	—	S225A
9	φ4	150	12	0.178	—	S225A
10	φ4	260	6	0.154	—	S225A
11	D10	1800	2	2.053	—	S225A
計				94.326		
総重量			2439 kg			

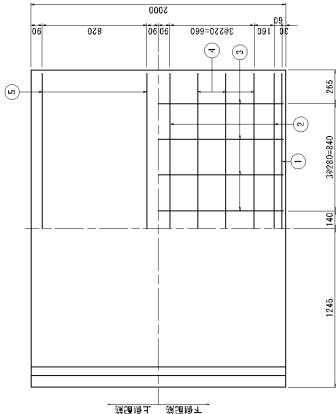


側面図



断面図

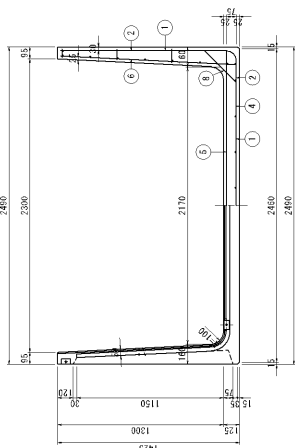

側面図




ワイドフレーム H1300xB2400

3-1 10

鉄筋加工図

200φ-4本 L=5320


200φ-2本 L=4900

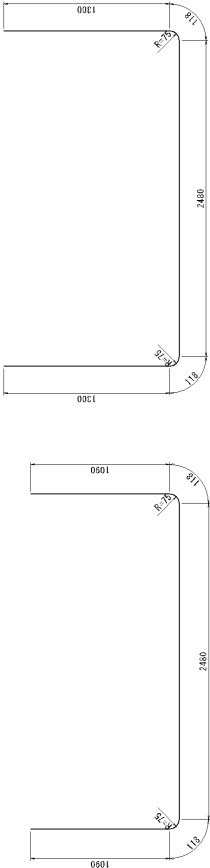


材料表 (一本当り)

棒筋 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	Ø16	4900	2	15.218	U	S225SA
2	Ø16	5320	4	33.197	U	S225SA
3	Ø10	1800	9	9.878	—	S225SA
4	Ø10	2500	6	8.501	—	S225SA
5	Ø10	2500	4	5.667	—	S225SA
6	Ø4	1300	20	2.722	—	S225SA
7	Ø10	1800	16	17.682	—	S225SA
8	Ø10	360	8	1.813	—	S225SA
9	Ø4	150	12	0.178	—	S225SA
10	Ø4	260	6	0.154	—	S225SA
11	Ø10	1800	2	2.053	—	S225SA
計				86.553		
総重量			2487 kg			


平面図

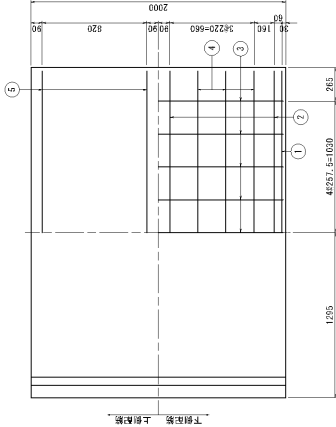


側面図



断面図

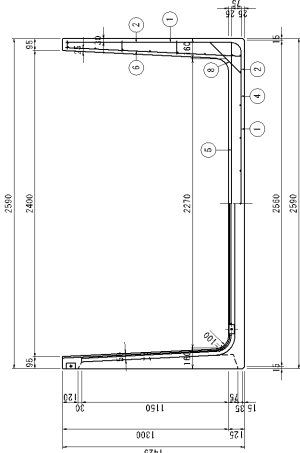

側面図





ワイドフレーム H1300xB2500

3-1 10


材料表 (一本当り)

規格 No.	径 (mm)	長さ (mm)	本数 (1/c)	重量 (kg)	形状	材質
1	φ16	5000	2	15.600	□	S225SA
2	φ16	5400	4	33.821	□	S225SA
3	φ10	1800	9	9.818	—	S225SA
4	φ10	2600	6	8.837	—	S225SA
5	φ10	2600	4	5.891	—	S225SA
6	φ4	1300	20	2.722	—	S225SA
7	φ10	1800	16	17.682	—	S225SA
8	φ10	360	8	1.813	—	S225SA
9	φ4	150	12	0.178	—	S225SA
10	φ4	260	6	0.154	—	S225SA
11	φ10	1800	2	2.103	—	S225SA
計				88.248		
総重量		25416	kg			


平面図

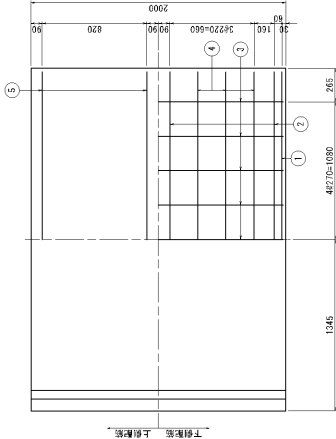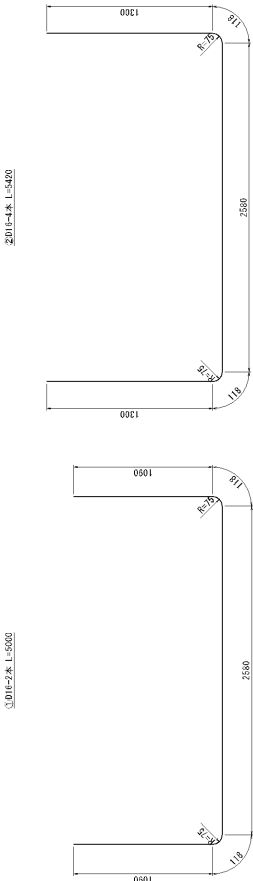


側面図



断面図

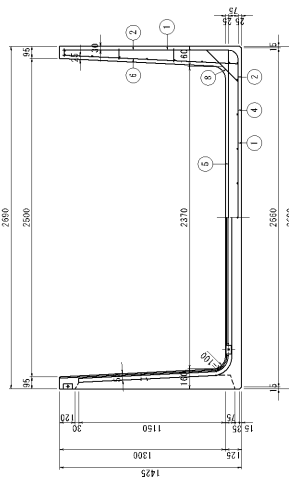

側面図



ワイドフレーム H1300xB2600


3-1 10

鉄筋加工図

200E-2本 L=5100

200E-2本 L=5100


200E-4本 L=5520

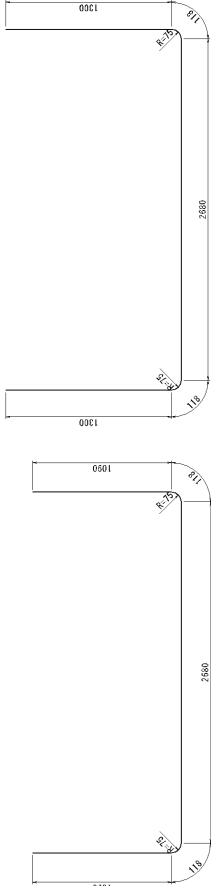

平面図

材料表 (一本当り)

材料 No.	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
1	Ø16	5100	2	15.812	□	S225A
2	Ø16	5520	4	34.445	□	S225A
3	Ø10	1800	9	9.878	—	S225A
4	Ø10	2730	6	9.173	—	S225A
5	Ø10	2730	4	6.115	—	S225A
6	Ø4	1300	20	2.722	—	S225A
7	Ø10	1800	16	17.882	—	S225A
8	Ø10	360	8	1.813	—	S225A
9	Ø4	150	12	0.178	—	S225A
10	Ø4	260	6	0.154	—	S225A
11	Ø10	1800	2	2.103	—	S225A
計				99.545		
総重量			2605 kg			

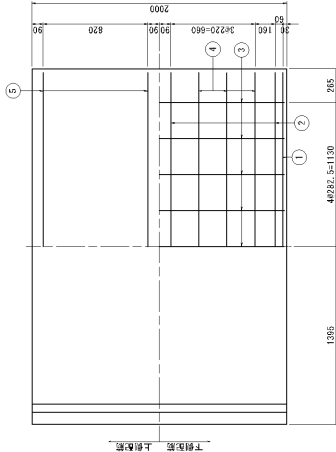

200E-2本 L=1860

1860

200E-4本 L=2720

2720

200E-2本 L=1860

1860

200E-16本 L=1860

1860

200E-2本 L=360

360

200E-4本 L=260




260

200E-2本 L=1860

1860

側面図

断面図

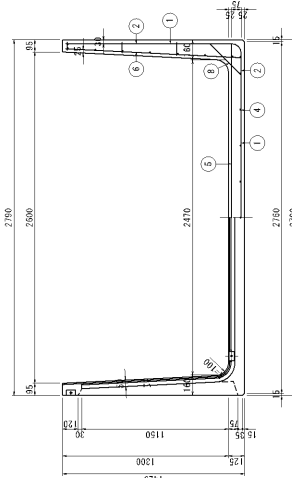


ワイドフレーム H1400xB900

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ15	3460	2	10.795	—	S275SA
	2	φ15	3000	4	24.336	—	S275SA
	3	φ10	1960	3	3.293	—	S275SA
	4	φ10	1070	6	3.477	—	S275SA
	5	—	—	—	—	—	—
鋁	6	φ4	1470	20	2.911	—	S275SA
	7	φ10	1960	18	17.982	—	S275SA
	8	φ10	390	8	1.413	—	S275SA
	9	φ4	130	12	0.178	—	S275SA
	10	φ4	240	6	0.134	—	S275SA
	11	φ10	1800	2	2.053	—	S275SA
					66.252		
製品重量				1832	kg		


平面図




側面図



断面図




側面図




縦断加工図

①D10-2本 L=3460




②D10-4本 L=3300




③D10-2本 L=1960




④D10-4本 L=1070




⑤φ4-20本 L=1470




⑥D10-16本 L=1960




⑦φ4-12本 L=130



⑧φ4-4本 L=240



⑨D10-2本 L=1800




ワイドブリューム H1400xB1100

 $S=1:20$


材料表 (一本当り)

材料	規格	厚	長	支	數量	單位	形狀	材質
鐵線	1	Ø15	2666	2	11,419	—	U	S2025A
	2	Ø15	4100	4	25,284	—	U	S2025A
	3	Ø10	1966	4	4,390	—	—	S2025A
	4	Ø10	1220	6	4,039	—	—	S2025A
	5	—	—	—	—	—	—	S2025A
管	6	φ 4	470	20	2,311	—	—	S2025A
	7	Ø10	1960	18	17,482	—	—	S2025A
	8	Ø10	360	8	1,812	—	—	S2025A
	9	φ 4	150	12	0,179	—	—	S2025A
	10	φ 4	266	6	0,154	—	—	S2025A
	11	Ø10	1660	2	2,033	—	—	S2025A
計					59,393			
總計				1370	54			


區區耳




側面図




断面図



側面図



鉄筋加工図

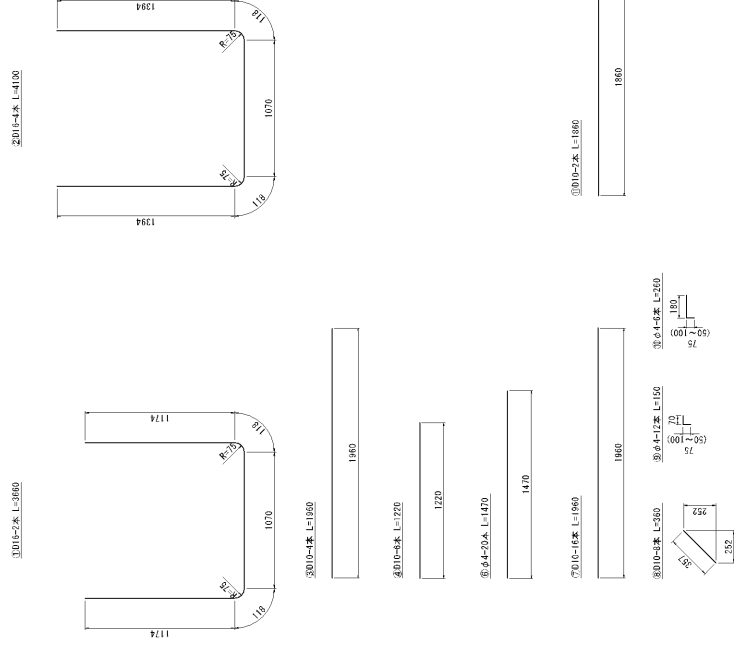

鉄筋加工図


ワイドフレーム H1400xB1200

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
紙	1	φ15	3760	2	11.731	—	S205SA
	2	φ15	4200	4	26.298	—	S205SA
	3	φ10	1960	4	4.390	—	S205SA
	4	φ10	1370	6	4.435	—	S205SA
	5	—	—	—	—	—	—
筋	6	φ4	1470	20	2.911	—	S205SA
	7	φ10	1960	18	17.562	—	S205SA
	8	φ10	390	8	1.613	—	S205SA
	9	φ4	130	12	0.178	—	S205SA
	10	φ4	240	6	0.134	—	S205SA
	11	φ10	1800	2	2.053	—	S205SA
					71.265		
製品重量				1433	kg		


平面図




縦筋加工図

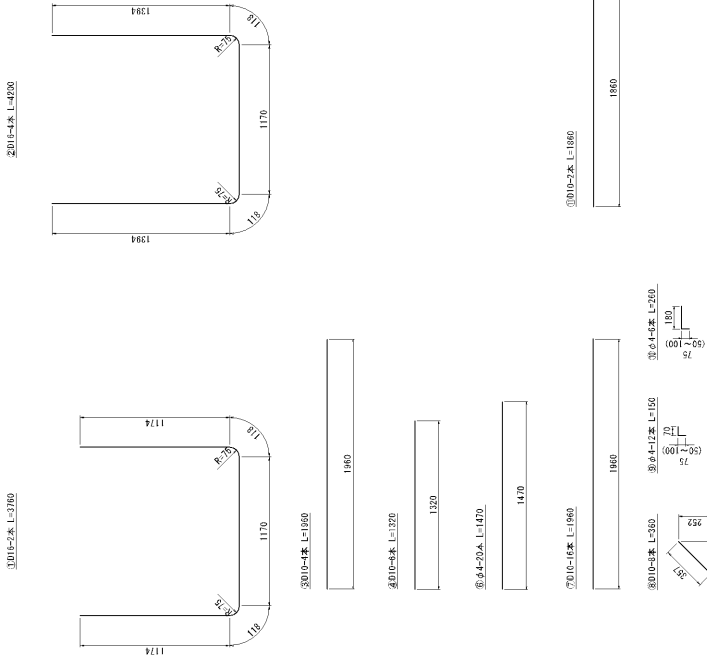

断面図



側面図




ワイドフレーム H1400xB1300

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
紙	1	φ16	3860	2	12.643	—	S2025SA
	2	φ16	4300	4	26.832	—	S2025SA
	3	φ10	1960	5	5.488	—	S2025SA
	4	φ10	1420	6	4.771	—	S2025SA
	5	—	—	—	—	—	—
筋	6	φ4	1470	20	2.911	—	S2025SA
	7	φ10	1960	18	17.562	—	S2025SA
	8	φ10	390	8	1.613	—	S2025SA
	9	φ4	130	12	0.178	—	S2025SA
	10	φ4	240	6	0.134	—	S2025SA
	11	φ10	1800	2	2.053	—	S2025SA
	—	—	—	—	—	—	—
				冊	73.635		
製品重量				1897	kg		


平面図




③010-2本 L=3860




2016-4本 L=4300




③010-2本 L=1960




2010-4本 L=1420




⑥4-20本 L=1470




⑦010-16本 L=1960




⑧φ4-12本 L=150




⑨φ4-4本 L=500




③010-2本 L=1800



側面図



側面図




ワイドフレーム H1400xB1400

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
紙	1	φ16	3960	2	12.355	—	S3025SA
	2	φ16	4400	4	27.456	—	S3025SA
	3	φ10	1960	5	5.488	—	S3025SA
	4	φ10	1270	6	5.107	—	S3025SA
	5	—	—	—	—	—	—
筋	6	φ4	1470	20	2.911	—	S3025SA
	7	φ10	1960	18	17.952	—	S3025SA
	8	φ10	390	8	1.613	—	S3025SA
	9	φ4	130	12	0.178	—	S3025SA
	10	φ4	240	6	0.134	—	S3025SA
	11	φ10	1800	2	2.053	—	S3025SA
計					74.907		
製品重量				1855	kg		


平面図




縁加工図

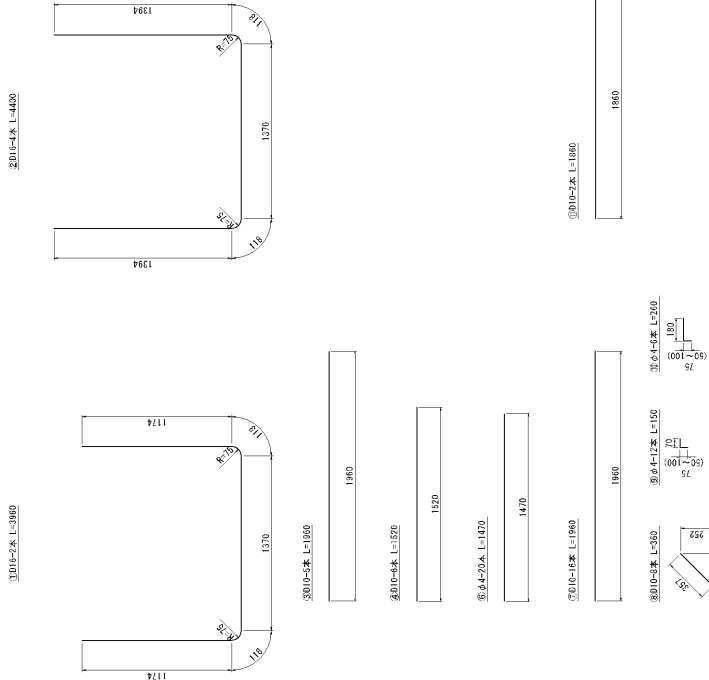


側面図



断面図



側面図




ワイドフレーム H1400xB1500

$$S=1:20$$


材料表 (一本当り)

類別	N ^o	型	質	之	數量	形式	材質
				本	Mo		
管	1	D15	4060	2	12.87	—	S325SA
	2	D15	4200	4	28.50	—	S325SA
	3	D10	1666	5	5.48	—	S325SA
	4	D10	1270	6	5.43	—	S325SA
	5	—	—	—	—	—	S325SA
管	6	ø 4	1470	20	2.31	—	S325SA
	7	D10	1660	18	17.42	—	S325SA
	8	D10	560	8	1.82	—	S325SA
	9	ø 4	150	12	0.78	—	S325SA
	10	ø 4	266	6	0.54	—	S325SA
管	11	D10	1660	2	2.93	—	S325SA
	12	—	—	—	—	—	S325SA
計					36.79		


平面图




側面図




断面図

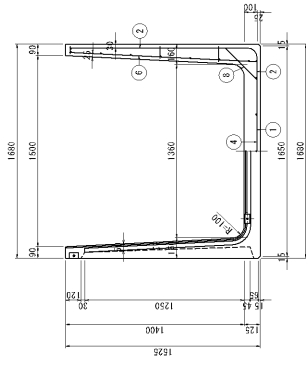


側面図




鉄筋加工図

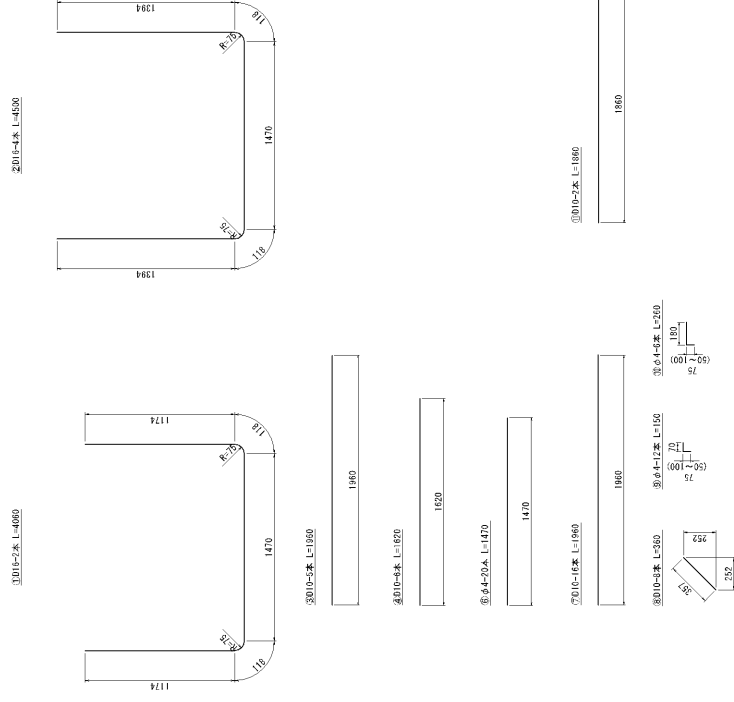


平面图




側面図



断面図

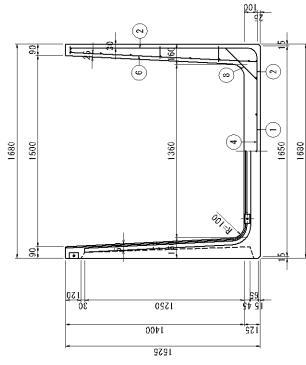

側面図




ワイドフレーム H1400xB1600

$$S=1:20$$


材料表 (一本当り)

標本 N 度	度	長	本数	體積	制式	材質
底	1	0.6	4160	2	12.739	S025A
	2	0.6	4000	4	28.704	S025A
	3	0.6	1660	6	6.386	S025A
	4	0.0	1770	6	5.779	S025A
	5	-	-	-	-	-
端	6	6.4	1470	20	2.311	S025A
	7	0.0	1660	18	1.492	S025A
	8	0.0	560	8	1.812	S025A
	9	6.4	150	12	0.178	S025A
	10	6.4	260	6	0.154	S025A
	11	0.0	1660	2	2.493	S025A
計				78.546		


平面图




圖例圖




断面図

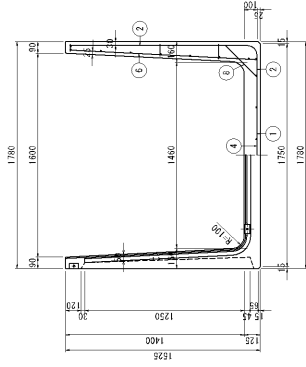

側面図



鉄筋加工図

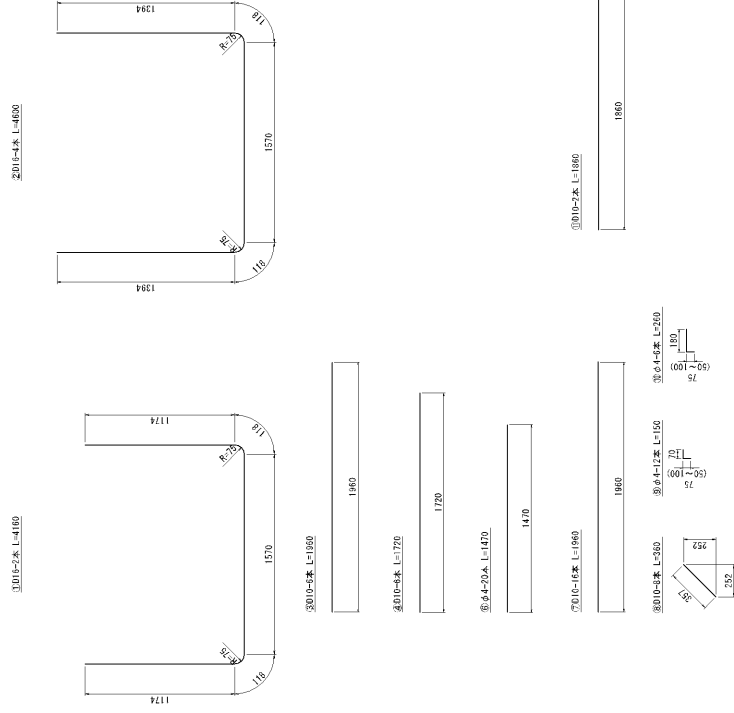

平面图


ワイドフレーム H1400xB1700

3-1 10


材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ15	4260	2	13.291	—	SUS304
	2	φ15	4700	4	29.328	—	SUS304
	3	φ10	1660	6	6.386	—	SUS304
	4	φ10	1820	6	6.115	—	SUS304
	5	—	—	—	—	—	—
脚	6	φ4	1470	20	2.911	—	SUS304
	7	φ10	1660	18	17.562	—	SUS304
	8	φ10	390	8	1.613	—	SUS304
	9	φ4	130	12	0.178	—	SUS304
	10	φ4	240	6	0.134	—	SUS304
	11	φ10	1860	2	2.053	—	SUS304
					79.821		
製品重量				2132	kg		


平面図




縦加工図

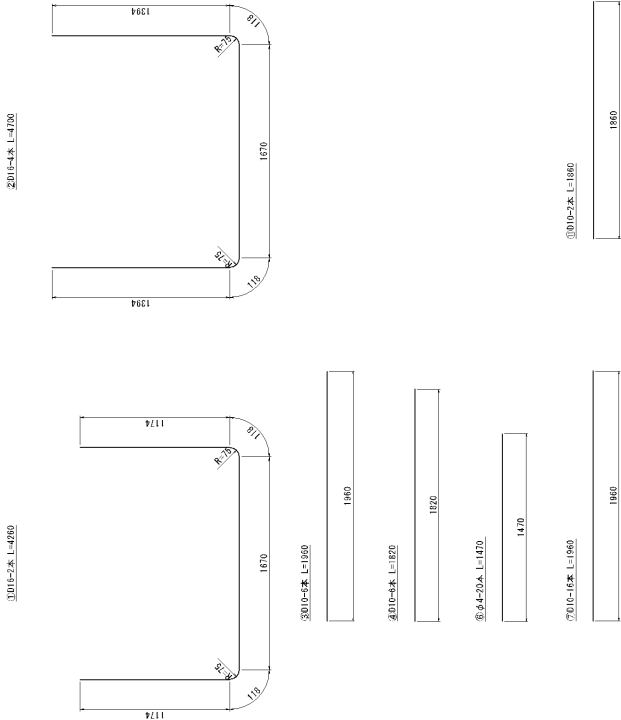


側面図



断面図

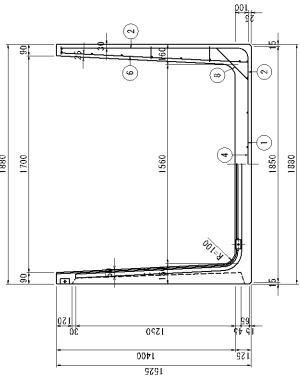

側面図




ワイドフレーム H1400×B1800

 $s=1:20$


材料表 (一本当り)

[illegible]


平面图

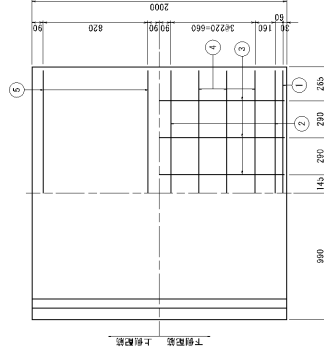


側面図





断面図

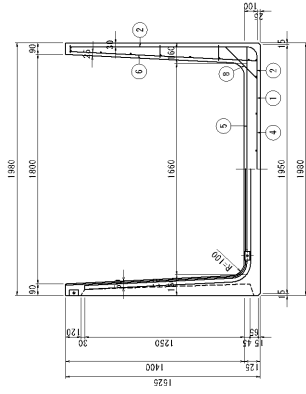

側面図



鉄筋加工図



5010-4本 L=1920



01010-2本 L=1860




ワイドフレーム H1400xB1900

$s=1:20$


材料表 (一本当り)

[illegible]


平面图

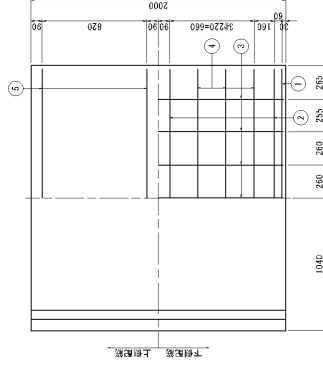


側面図





断面图

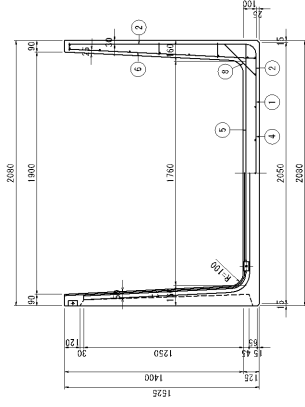

側面図




钢筋加工图



3010-7本 L=1960



5010-4本 L=2020

⑥ $\phi 4-20A$ $L=1470$ 

01010-2本 L=1860




ワイドフレーム H1400xB2100

 $s=1:20$


材料表 (一本当り)

類別	N°	型	質	之	本數	數量	形式	材質
鐵	1	D15	4660	2	14,339	—	U	S2025A
	2	D15	5100	4	51,824	—	U	S2025A
	3	D10	1666	7	8,183	—	—	S2025A
	4	D10	2226	6	7,459	—	—	S2025A
	5	D10	2226	4	4,732	—	—	S2025A
鋁	6	6	6	4	1470	20	2,311	S2025A
	7	D10	1660	18	17,482	—	—	S2025A
	8	D10	360	8	1,412	—	—	S2025A
	9	6	4	150	12	0,718	—	S2025A
	10	6	4	266	6	0,154	—	S2025A
	11	D10	1660	2	2,893	—	—	S2025A
計					30,379			


平面图

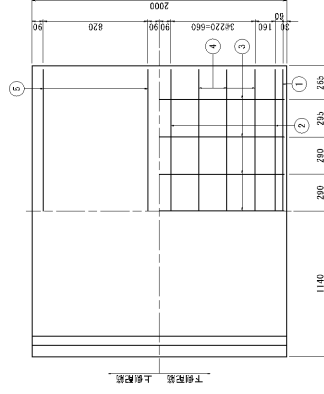


钢筋加工图

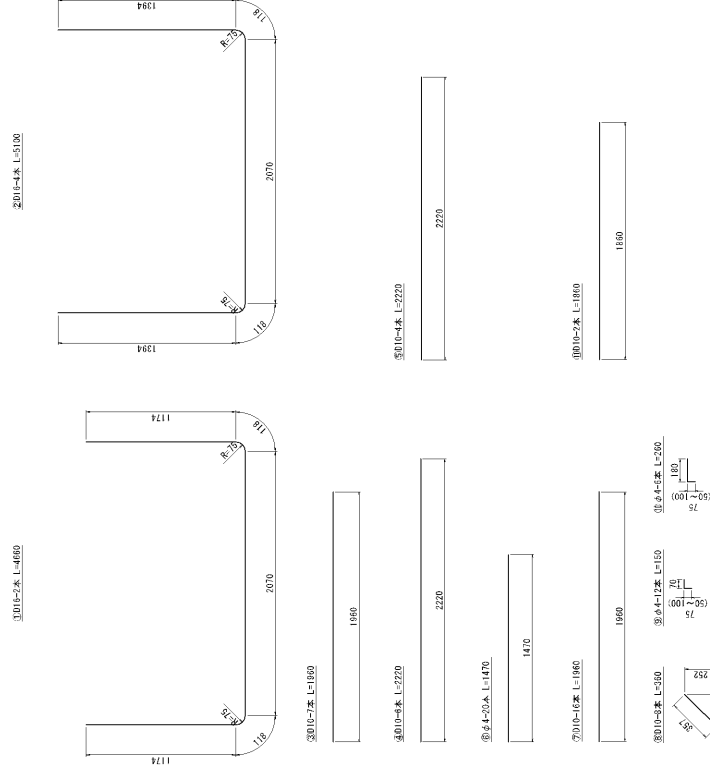

側面図



断面図

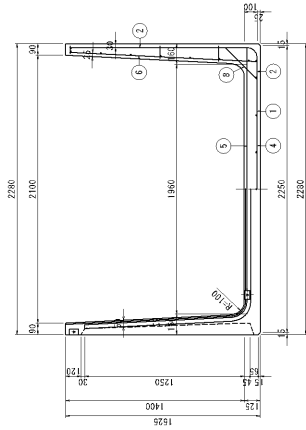

ワイドフレーム H1400×B2200

$s=1:20$

材料表 (一本当り)

類別	N°	型	質	之	數量	每式	材質
鐵	1	D15	4760	2	14,551	—	S2025A
	2	D15	5200	4	32,448	—	S2025A
	3	D10	1666	6	8,781	—	S2025A
	4	D10	2326	6	7,795	—	S2025A
	5	D10	2326	4	5,197	—	S2025A
鋁	6	64	1470	20	2,811	—	S2025A
	7	D10	1660	18	17,482	—	S2025A
	8	D10	560	8	1,412	—	S2025A
	9	64	150	12	0,718	—	S2025A
	10	64	266	6	0,154	—	S2025A
	11	D10	1660	2	2,893	—	S2025A
計					33,573		


ワイドフレーム H1400xB2300

3-1 120

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
紙	1	φ16	4660	2	15.163	—	SUS304
	2	φ16	5300	4	33.672	—	SUS304
	3	φ16	1960	8	8.781	—	SUS304
	4	φ16	2470	6	8.131	—	SUS304
	5	φ16	2470	4	5.471	—	SUS304
	6	φ4	1470	20	2.911	—	SUS304
筋	7	φ16	1960	18	17.952	—	SUS304
	8	φ16	3960	8	1.613	—	SUS304
	9	φ4	1360	12	0.178	—	SUS304
	10	φ4	2460	6	0.134	—	SUS304
	11	φ16	1860	2	2.053	—	SUS304
					95.669		
製品重量				2484	kg		


平面図

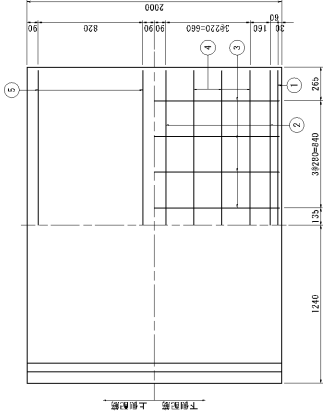


鉄筋加工図

①φ16×2本 L=4800


②φ16×4本 L=5300

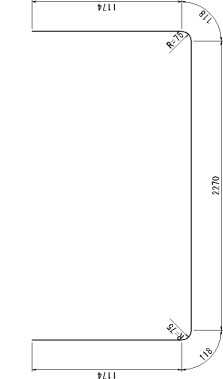


③φ16×3本 L=1960




④φ16×4本 L=2470



⑤φ4×20本 L=1470



⑥φ16×1本 L=1860




⑦φ16×2本 L=530




⑧φ16×2本 L=1800



側面図



断面図

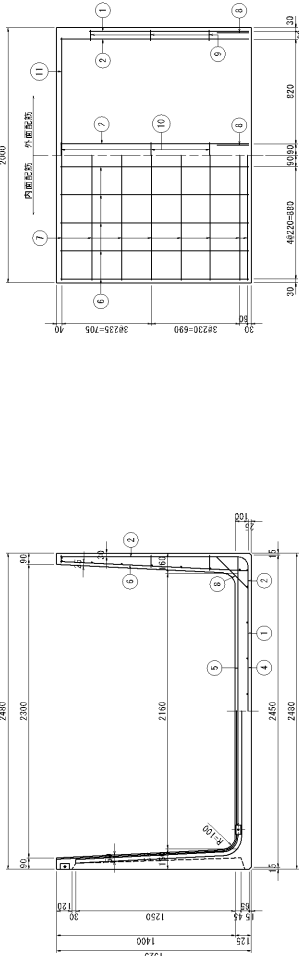


ワイドフレーム H1400xB2400

3-1 120

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	4960	2	15.475	—	S355SA
	2	φ16	5400	4	33.696	—	S355SA
	3	φ16	1960	8	8.781	—	S355SA
	4	φ16	2500	6	8.467	—	S355SA
	5	φ16	2500	4	5.645	—	S355SA
	6	φ4	1470	20	2.911	—	S355SA
筋	7	φ16	1960	18	17.562	—	S355SA
	8	φ16	3960	8	1.613	—	S355SA
	9	φ4	1360	12	0.178	—	S355SA
	10	φ4	2400	6	0.134	—	S355SA
	11	φ16	1860	2	2.053	—	S355SA
	筋				96.555		
製品重量				2343	kg		

平面図

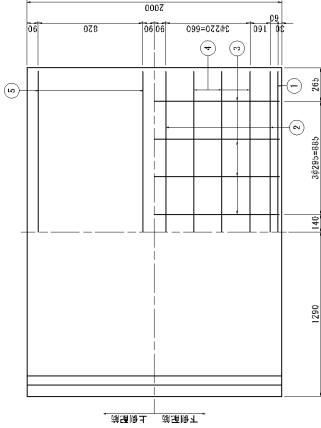


鉄筋加工図


①φ16-2本 L=4960

②φ16-4本 L=5400


③φ16-2本 L=1960



④φ16-2本 L=2500




⑤φ4-20本 L=1470




⑥φ16-1本 L=1860




⑦φ16-2本 L=2500




側面図



断面図

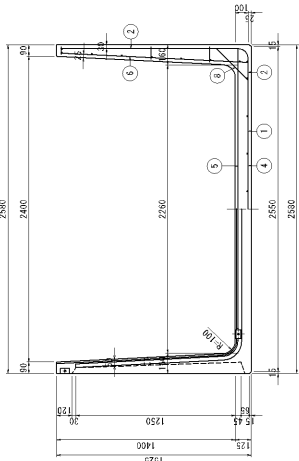

側面図




ワイドフレーム H1400xB2500

$$S=1:20$$


材料表 (一本当り)

材料	N 0	型	規	單	數	材	料
樑	1	D15	5066	2	15.37	—	S0254A
	2	D15	5006	4	34.20	—	S0254A
	3	D10	1966	5	9.78	—	S0254A
	4	D10	2626	6	8.03	—	S0254A
	5	D10	2626	4	5.89	—	S0254A
柱	6	φ 4	1470	20	2.31	—	S0254A
	7	D10	1966	18	17.42	—	S0254A
	8	D10	366	8	1.81	—	S0254A
	9	φ 4	156	12	0.78	—	S0254A
	10	φ 4	266	6	0.54	—	S0254A
	11	D10	1666	2	2.83	—	S0254A
計						39.150	


平面图

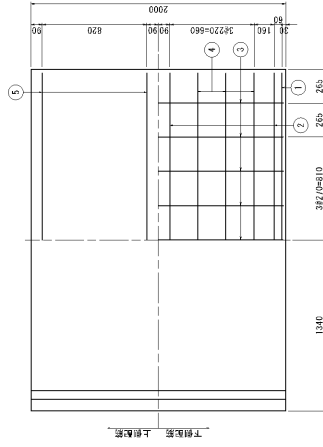


圖面例




断面図

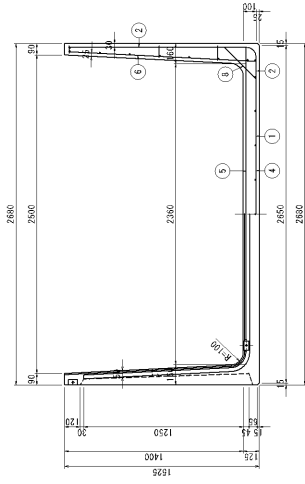

側面図



鉄筋加工区

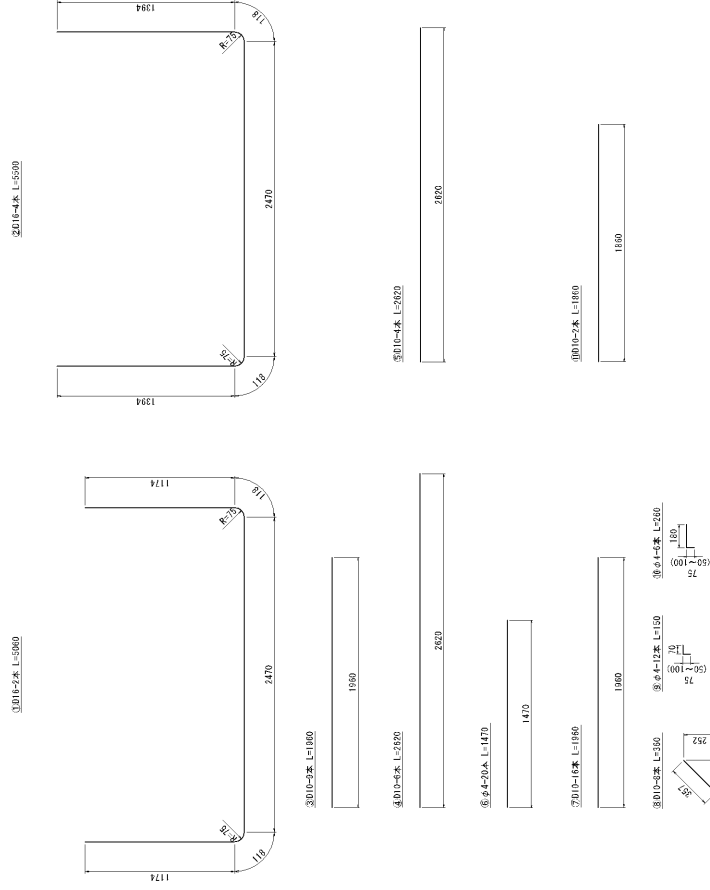


ワイドフレーム H1400xB2600

3=1 10

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	5160	2	16.099	┐┐	S275SA
	2	φ16	5600	4	34.944	┐┐	S275SA
	3	φ16	1960	9	9.878	┐┐	S275SA
	4	φ16	2770	6	9.139	┐┐	S275SA
	5	φ16	2770	4	6.093	┐┐	S275SA
	6	φ4	1470	20	2.911	┐┐	S275SA
筋	7	φ16	1960	18	17.562	┐┐	S275SA
	8	φ16	3960	8	1.613	┐┐	S275SA
	9	φ4	1360	12	0.178	┐┐	S275SA
	10	φ4	2460	6	0.134	┐┐	S275SA
	11	φ16	1860	2	2.053	┐┐	S275SA
計					105.654		
製品重量				24800	kg		


平面図

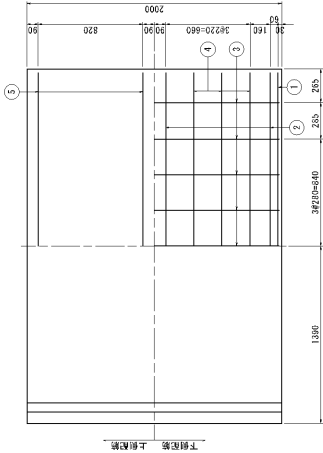


鉄筋加工図

①φ16-2本 L=5160


②φ16-4本 L=5600

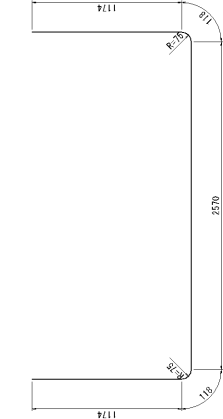


③φ16-2本 L=1960




④φ16-4本 L=2770



⑤φ4-20本 L=1470



⑥φ16-1本 L=1860



⑦φ4-4本 L=5160




⑧φ4-1本 L=1360




⑨φ16-2本 L=2570




側面図



断面図

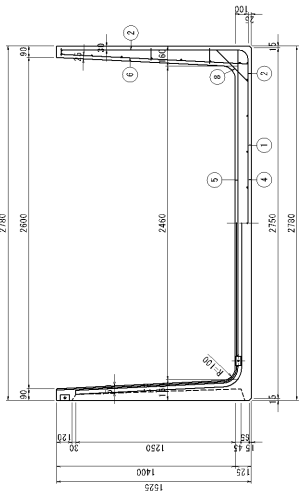

側面図




ワイドフレーム H1400xB2700

3=1 10

材料表 (一本当り)



種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	φ16	6760	2	16.411	—	S275SA
	2	φ16	6700	4	35.568	—	S275SA
	3	φ16	1960	9	9.878	—	S275SA
	4	φ16	2870	6	9.475	—	S275SA
	5	φ16	2870	4	6.317	—	S275SA
	6	φ4	1470	20	2.911	—	S275SA
筋	7	φ10	1960	18	17.952	—	S275SA
	8	φ10	390	8	1.613	—	S275SA
	9	φ4	130	12	0.178	—	S275SA
	10	φ4	240	6	0.134	—	S275SA
	11	φ10	1860	2	2.053	—	S275SA
					102.150		
製品重量				2719	kg		

平面図

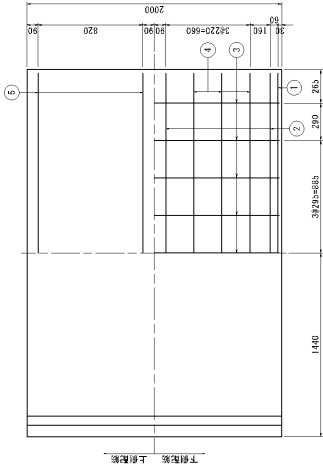


下側配筋 上側配筋


鉄筋加工図

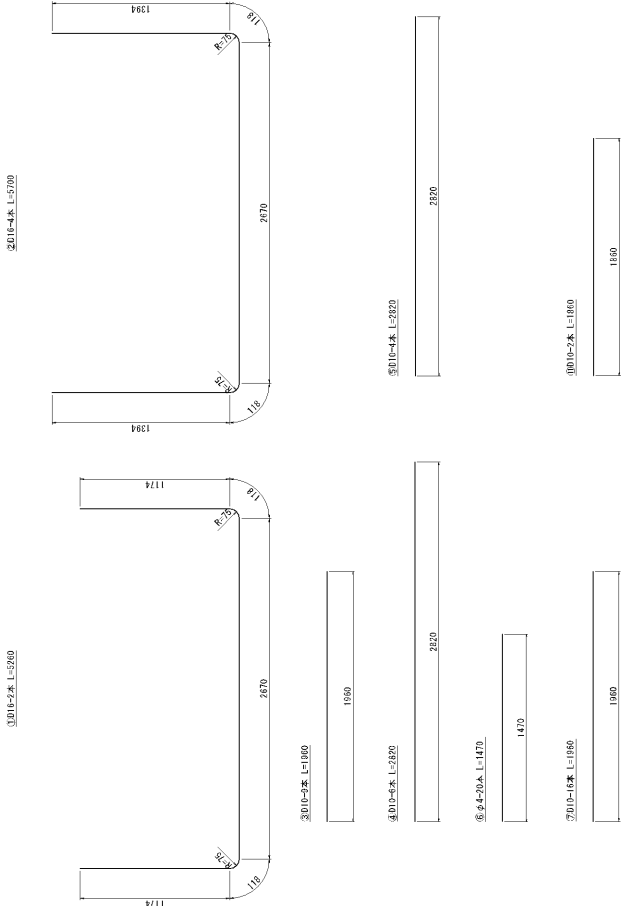

側面図



断面図

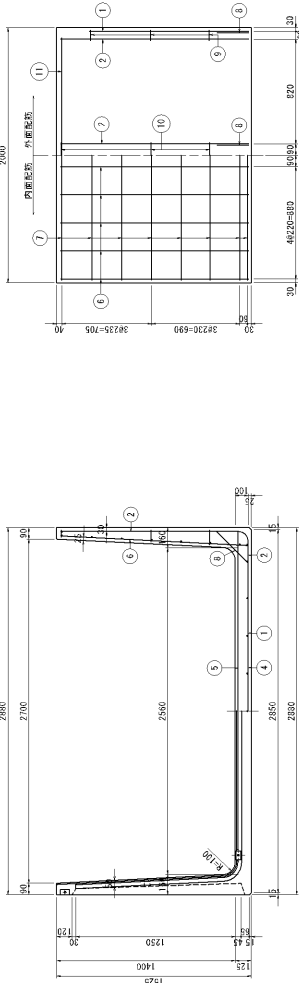


ワイドフレーム H1400xB2800

3=1 20

鉄筋加工図

①010-2本 L=2400


2010-4本 L=1800

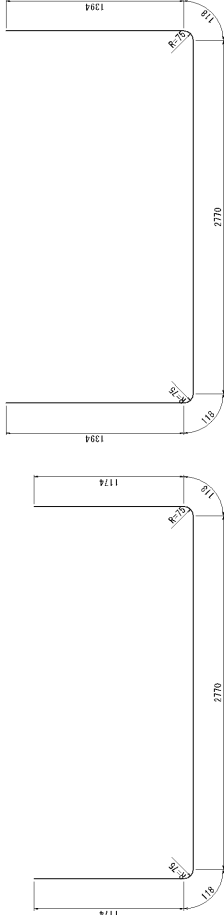

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D16	6560	2	16.723	—	S32B5A
	2	D16	6800	4	36.192	—	S32B5A
	3	D10	1660	10	10.976	—	S32B5A
	4	D10	2970	6	9.811	—	S32B5A
	5	D10	2970	4	6.541	—	S32B5A
	6	φ4	1470	20	2.911	—	S32B5A
筋	7	D10	1660	18	17.562	—	S32B5A
	8	D10	390	8	1.613	—	S32B5A
	9	φ4	130	12	0.178	—	S32B5A
	10	φ4	240	6	0.134	—	S32B5A
	11	D10	1800	2	2.053	—	S32B5A
					104.744		
製品重量				2773	kg		

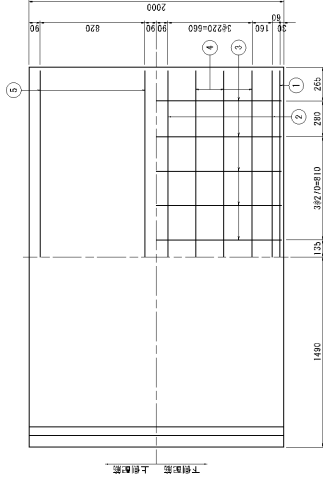

③010-10本 L=1800

1950

④010-4本 L=2970

2920

⑤φ4-20本 L=1470

1470

②010-14本 L=1860

1900

⑥φ4-4本 L=500

500


⑦φ4-14本 L=130

130


⑧010-5本 L=252

252

側面図



側面図








ワイドフレーム H1500×B900

$$S=1:20$$

鉄筋加工図

材料表 (一本当り)

標本 No.	種	長	寬	厚	制	材
1	10.5	2660	2	11,419	5025A	5025A
2	10.5	4140	4	25,834	5025A	5025A
3	10.0	1960	3	3,292	5025A	5025A
4	10.0	1040	6	3,494	5025A	5025A
5	-	-	-	-	-	-
6	6.4	1000	20	2,188	5025A	5025A
7	10.0	1960	18	17,892	5025A	5025A
8	10.0	440	8	1,271	5025A	5025A
9	6.4	150	12	0,178	5025A	5025A
10	6.4	260	6	0,154	5025A	5025A
11	10.0	1860	2	2,493	5025A	5025A
計				80,156		

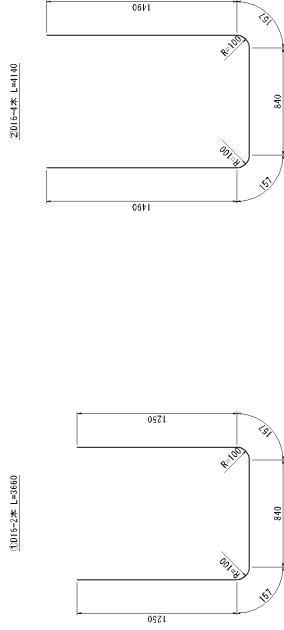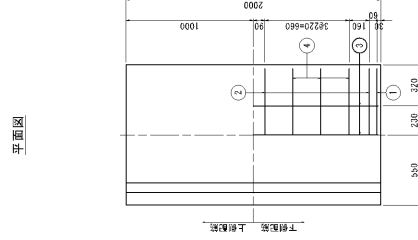


ワイドフレーム H1500xB1000


3-1 10

鉄筋加工図

①D15-2本 L=2160




②D15-4本 L=1240





平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D15	3760	2	11.731	—	S275SA
	2	D15	4240	4	26.458	—	S275SA
	3	D10	1960	4	4.390	—	S275SA
	4	D10	1140	6	3.830	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
計					71.325		
製品重量				2012	kg		




③D10-2本 L=1800




⑤D10-4本 L=1150



側面図



側面図




ワイドフレーム H1500xB1100

$$S=1:20$$


鉄筋加工図

[illegible]

材料表 (一本当り)

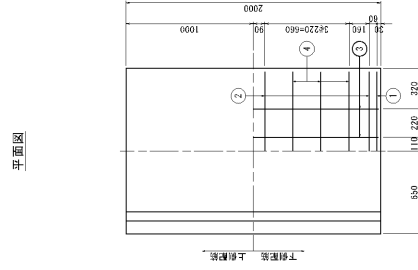


平面图

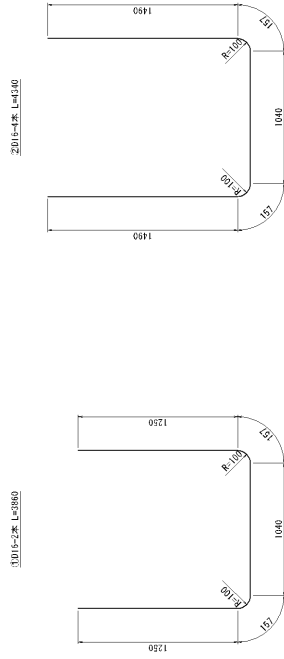


①D16-2本 L=3860


2016-4本 L=1340

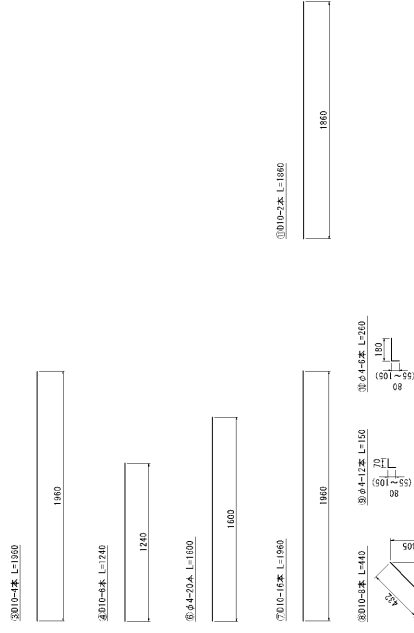

⑧ 0.10-3米 L=440



側面圖




ワイドフレーム H1500xB1200

3-1 10

鉄筋加工図

①D15-2本 L=960


2D15-4本 L=440



平面図

材料表 (一本当り)



種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	960	2	12.355	—	S275SA
	2	D15	440	4	27.796	—	S275SA
	3	D10	1660	4	4.390	—	S275SA
	4	D10	1340	6	4.592	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1660	18	17.852	—	S275SA
	8	D10	440	8	1.871	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1660	2	2.053	—	S275SA
	12	—	—	—	—	—	—
計					74.659		
製品重量				2143	kg		




下側配筋 上側配筋

③D10-2本 L=1660


2D15-4本 L=1660



側面図



側面図



ワイドフレーム H1500xB1300






$$S=1:20$$

鉄筋加工図


材料表 (一本当り)

標頭 No	種	英	支	體積	制式	材質
1	015	4060	2	12.637	—	S202SA
2	015	4540	4	28.330	—	S202SA
3	010	1960	5	5.488	—	S202SA
4	010	1440	6	4.138	—	S202SA
5	—	—	—	—	—	—
6	6.4	1000	20	2.168	—	S202SA
7	010	1960	18	17.492	—	S202SA
8	010	440	8	1.971	—	S202SA
9	6.4	156	12	0.178	—	S202SA
10	6.4	268	6	0.154	—	S202SA
11	010	1660	2	2.933	—	S202SA
計				76.439		
計			2100	kg		


平面图




圖例圖



断面図



側面図





ワイドフレーム H1500xB1400

3=1 20

鉄板加工図

①D15-2本 L=1160



2D15-4本 L=1640



平面図



材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	4160	2	12.979	┐┐	S275SA
	2	D15	4640	4	28.954	┐┐	S275SA
	3	D10	1960	5	5.488	—	S275SA
	4	D10	1540	6	5.174	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.952	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D10	1680	2	2.053	—	S275SA
計					77.711		
製品重量				2275 kg			



③D10-2本 L=1680

②D10-16本 L=1680




④φ4-12本 L=150




⑤D10-2本 L=1680




側面図



断面図

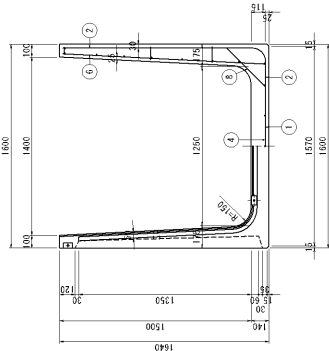

側面図





ワイドフレーム H1500xB1500

3-1 10

鉄板加工図

①D15-2本 L=4260

2D16-4本 L=1740



平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D15	4260	2	15.91	U	S275SA
	2	D15	4740	4	29.578	U	S275SA
	3	D10	1960	5	5.488	—	S275SA
	4	D10	1640	6	5.510	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.952	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1600	2	2.053	—	S275SA
計					78.932		
製品重量				2344	kg		

③D10-2本 L=1960

1960

④D10-4本 L=1640


1640

⑤φ4-20本 L=1000


1000

⑦D10-16本 L=1640


1640



側面図



側面図




ワイドフレーム H1500xB1600

3-1 10

鉄板加工図

①D15-2本 L=4360

2D15-4本 L=4340

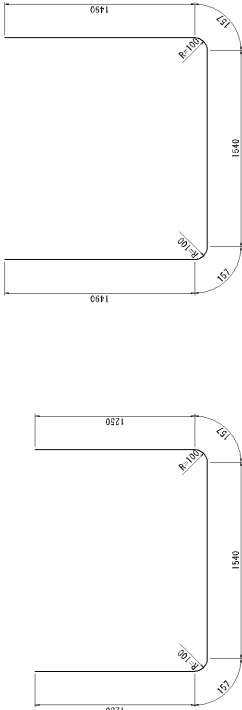


平面図


材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 kg	形状	材質
鉄	1	D15	4360	2	13.603	—	S275SA
	2	D15	4840	4	30.292	—	S275SA
	3	D10	1960	6	6.586	—	S275SA
	4	D10	1740	6	5.846	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
計					81.253		
製品重量				2400	kg		


③D10-2本 L=1960



④D10-4本 L=1740





⑤φ4-20本 L=1000




⑦D10-16本 L=1960




⑧D10-2本 L=1800




⑨φ4-12本 L=150




⑩φ4-12本 L=200




側面図



断面図

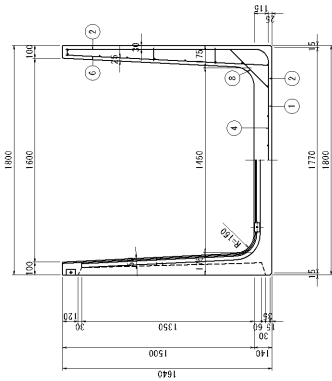

側面図




ワイドフレーム H1500xB1700

3-1 10

鉄板加工図

①D15-2本 L=4460

2D15-4本 L=1840

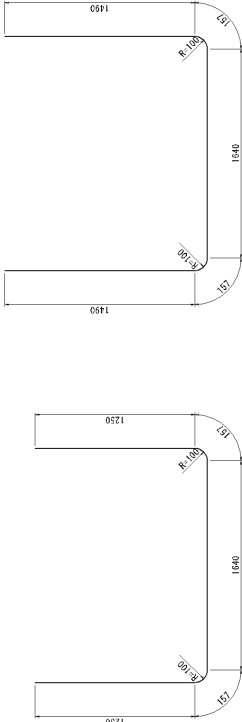


平面図


材料表 (一本当り)

種類	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	4460	2	12.915	—	S275SA
	2	D15	6940	4	30.826	—	S275SA
	3	D10	1960	6	6.586	—	S275SA
	4	D10	1840	6	6.182	—	S275SA
	5	—	—	—	—	—	—
筋	6	φ4	1600	20	3.168	—	S275SA
	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	260	6	0.154	—	S275SA
	11	D10	1860	2	2.053	—	S275SA
	12	—	—	—	—	—	—
計					82.625		
製品重量				2472	kg		


③D10-2本 L=1960




④D10-4本 L=1840




⑤φ4-20本 L=1000




⑦D10-16本 L=1960




⑧φ4-12本 L=150




⑨φ4-4本 L=200




側面図



断面図

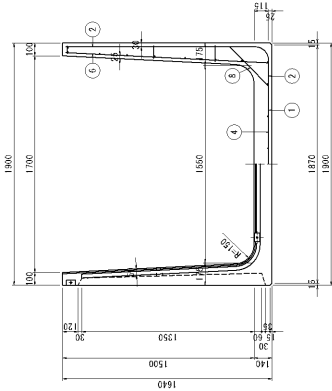

側面図





ワイドフレーム H1500xB1800

3=120

鉄板加工図

①D15-2本 L=4560


2D16-4本 L=6540




平面図

材料表 (一本当り)


種類	No	径	長さ (mm)	本数	重量 kg	形状	材質
鉄	1	D15	4560	2	14.277	—	S275SA
	2	D15	6040	4	31.450	—	S275SA
	3	D15	1960	6	6.386	—	S275SA
	4	D10	1940	6	6.518	—	S275SA
	5	D10	1940	4	4.346	—	S275SA
	6	φ4	1600	20	3.168	—	S275SA
筋	7	D10	1960	18	17.952	—	S275SA
	8	D10	440	8	1.971	—	S275SA
	9	φ4	190	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
					88.242		
製品重量				2533	kg		

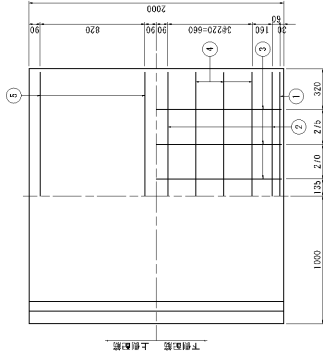


③D10-2本 L=1960



⑤D10-4本 L=1840



⑥φ4-20本 L=1000



⑦D10-16本 L=1960




⑧φ4-12本 L=150




⑨φ4-4本 L=200



側面図



側面図




ワイドフレーム H1500xB1900

3=1/20

鉄板加工図

①D15-2本 L=4660


2D16-4本 L=5140

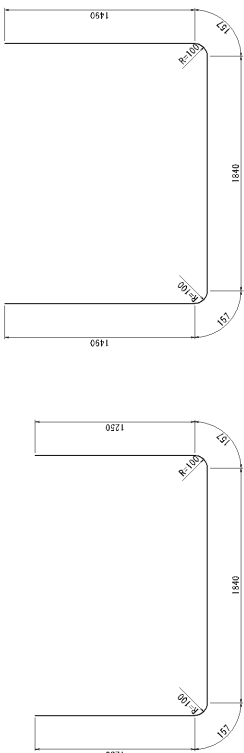


平面図

材料表 (一本当り)


種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D15	4660	2	14.539	—	SUS304
	2	D15	5140	4	32.074	—	SUS304
	3	D10	1960	7	7.683	—	SUS304
	4	D10	2040	6	6.894	—	SUS304
	5	D10	2040	4	4.570	—	SUS304
	6	φ4	1600	20	3.168	—	SUS304
鋁	7	D10	1960	18	17.952	—	SUS304
	8	D10	440	8	1.971	—	SUS304
	9	φ4	190	12	0.178	—	SUS304
	10	φ4	260	6	0.154	—	SUS304
	11	D10	1860	2	2.053	—	SUS304
計					90.826		
製品重量				2484	kg		

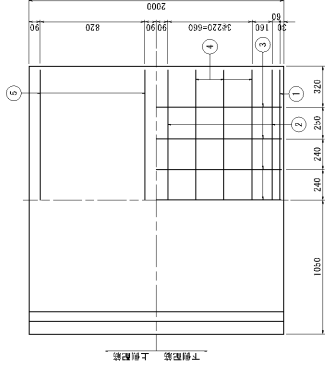


側面図



断面図

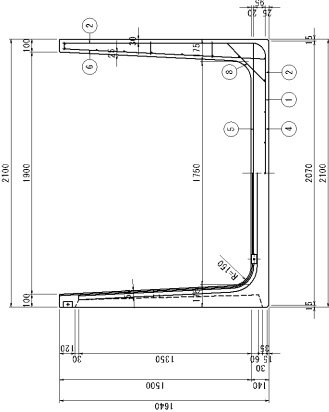


側面図




ワイドフレーム H1500xB2000

 $S=1:20$

鉄筋加工図

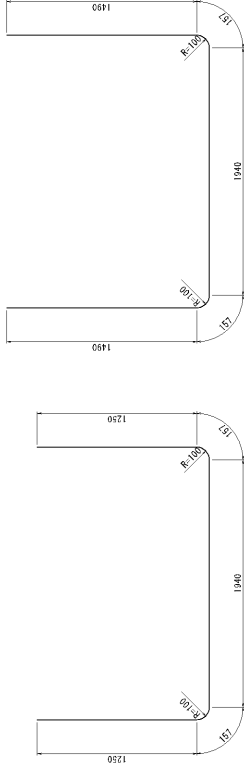


區區平

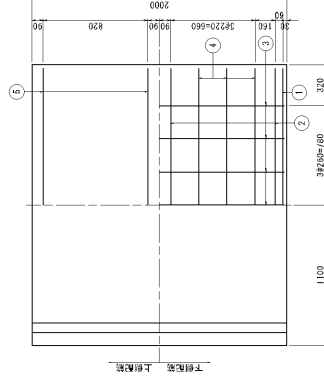


下倒配筋 上倒配筋

材料表 (一本当り)



標頭 No	型	原 形	名 稱	數量	單位	材 質
1	015	4766	2	14,511	—	S2025A
2	015	5240	4	32,082	—	S2025A
3	010	1662	7	7,193	—	S2025A
4	010	2140	6	7,190	—	S2025A
5	010	2140	4	4,794	—	S2025A
6	6 4	1600	20	3,189	—	S2025A
7	010	1662	18	17,582	—	S2025A
8	010	440	8	1,371	—	S2025A
9	6 4	150	12	0,178	—	S2025A
10	6 4	260	6	0,154	—	S2025A
11	010	1662	2	2,033	—	S2025A
計				32,332		
計				2110	kg	



倒置圖




断面图

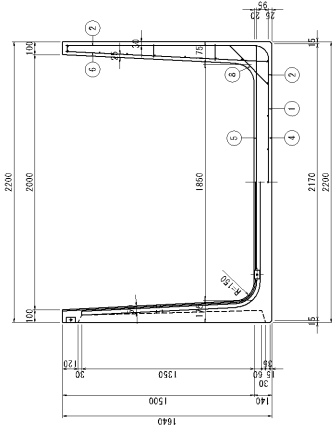

ワイドフレーム H1500xB2100

$$S=1:20$$


鉄筋加工図

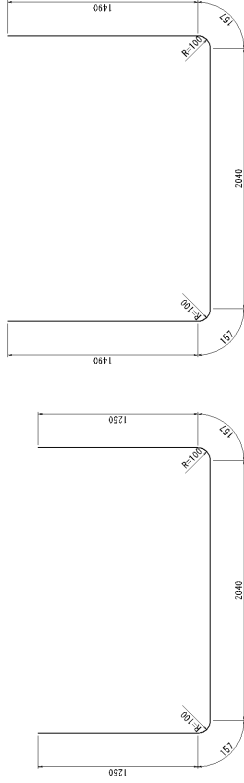


平面图

材料表 (一本当り)



類別	N ^o	型	質	之	數量	制	承認	實
紙	1	D15	4690	2	15,163			5025SA
	2	D15	5340	4	33,327			5025SA
	3	D10	1965	7	7,833			5025SA
	4	D10	2240	6	7,726			5025SA
	5	D10	2240	4	5,018			5025SA
箔	6	6-1	1600	20	3,188			5025SA
	7	D10	1960	18	17,342			5025SA
	8	D10	440	8	1,971			5025SA
	9	6-1	150	12	0,719			5025SA
	10	6-1	260	6	0,154			5025SA
管	11	D10	1600	2	2,633			5025SA
	12							
計					30,820			

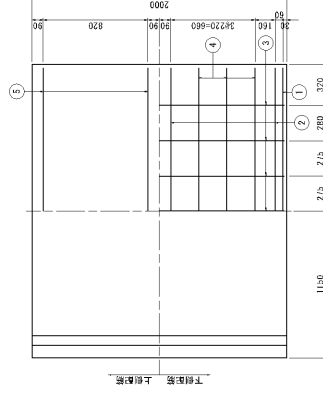

圖例圖



断面図

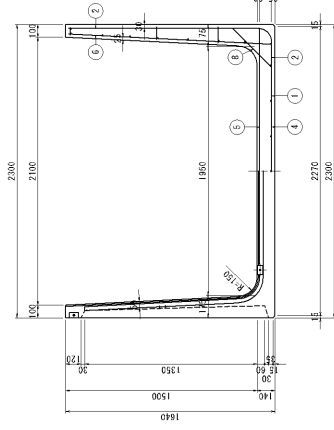

ワイドフレーム H1500xB2200


$$S=1:20$$

鉄筋加工図


材料表 (一本当り)

種類	N ₅₀	径	高	水曜	数量	形状	材質
鉄	1	D15	4960	2	15, 175	3×3	S324SA
	2	D15	5440	4	33, 448	—	S324SA
	3	D10	1960	6	8, 781	—	S324SA
	4	D10	2240	6	7, 862	—	S324SA
	5	D10	2240	4	5, 742	—	S324SA
鉄	6	φ 4	1400	20	2, 188	—	S307SA
	7	D10	1960	13	17, 482	—	S307SA
	8	D10	440	8	1, 971	—	S307SA
	9	φ 4	150	12	0, 179	—	S307SA
	10	φ 4	260	6	0, 154	—	S307SA
計	11	D10	1660	2	2, 493	—	S307SA
	計				86, 422		
計							


平面图

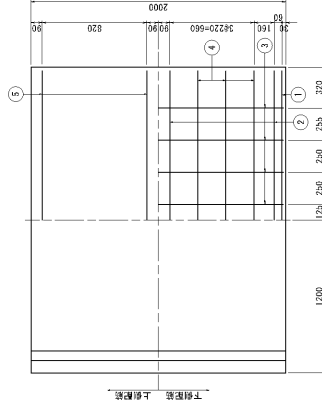

●

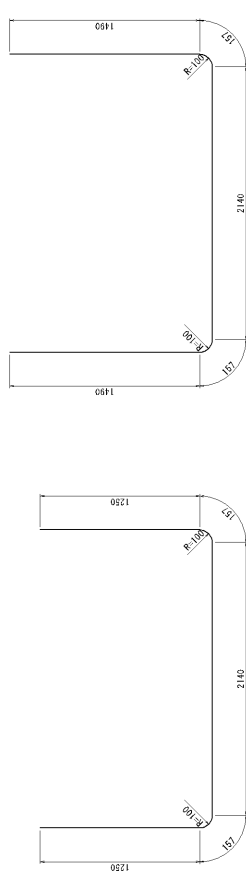


平面图




●




圖例圖



断面図

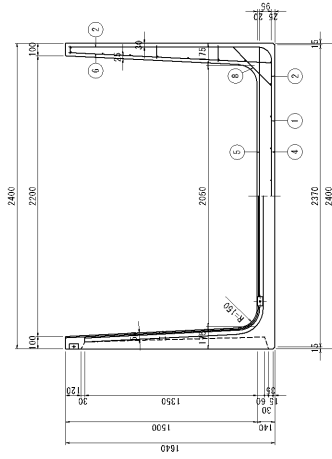

側面圖





ワイドフレーム H1500xB2400

3-1 120

鉄筋加工図

①D16-2本 L=5160


②D16-4本 L=5840

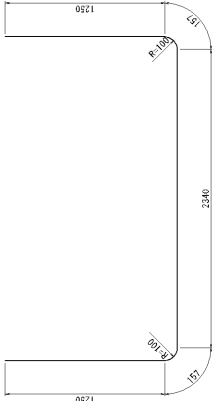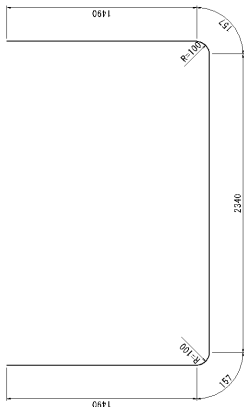

平面図

材料表 (一本当り)


種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D16	5160	2	16.699	—	S275SA
	2	D16	5840	4	35.194	—	S275SA
	3	D10	1960	8	8.781	—	S275SA
	4	D10	2640	6	8.534	—	S275SA
	5	D10	2640	4	5.690	—	S275SA
	6	φ4	1600	20	3.168	—	S275SA
筋	7	D10	1960	18	17.562	—	S275SA
	8	D10	440	8	1.471	—	S275SA
	9	φ4	130	12	0.178	—	S275SA
	10	φ4	260	6	0.134	—	S275SA
	11	D10	1800	2	2.053	—	S275SA
				計	99.414		
製品重量				2353	kg		

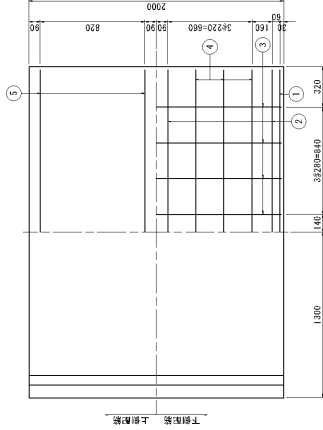


③D10-3本 L=1960



④D10-2本 L=2640



⑤φ4-20本 L=1600



⑥D10-1本 L=1800




⑦φ4-12本 L=1150




⑧φ4-4本 L=2300




側面図



断面図

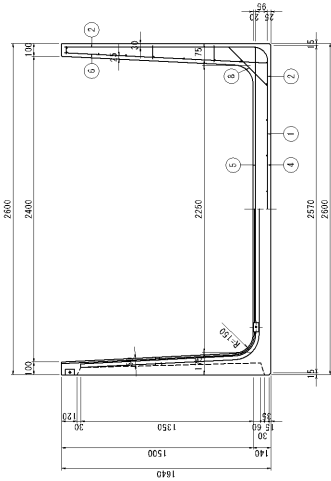

側面図

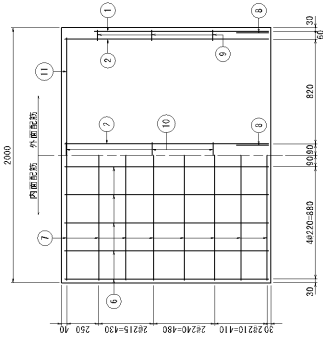



ワイドフレーム H1500xB2500

3-1 10

鉄筋加工図

①D16-2本 L=5240

①D16-2本 L=5240

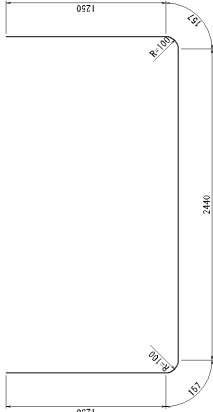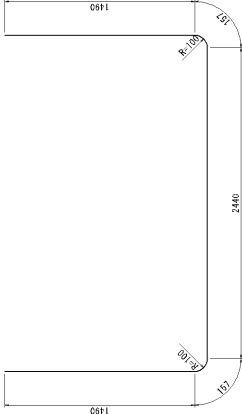

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D16	5240	2	16.411	—	S275SA
	2	D16	5740	4	35.818	—	S275SA
	3	D16	1960	8	9.878	—	S275SA
	4	D16	2640	6	8.870	—	S275SA
	5	D16	2640	4	5.914	—	S275SA
	6	φ4	1600	20	3.168	—	S275SA
筋	7	D16	1960	18	17.952	—	S275SA
	8	D16	440	8	1.971	—	S275SA
	9	φ4	150	12	0.178	—	S275SA
	10	φ4	240	6	0.154	—	S275SA
	11	D16	1800	2	2.053	—	S275SA
	計				102.007		
数量要約				2389 kg			

③D16-3本 L=1960

③D16-3本 L=1960

④D16-4本 L=2640

④D16-4本 L=2640

⑤φ4-20本 L=1500

⑤φ4-20本 L=1500

⑥D16-2本 L=1800

⑥D16-2本 L=1800

⑦φ4-4本 L=2500


⑦φ4-4本 L=2500

⑧φ4-4本 L=1500


⑧φ4-4本 L=1500

⑨D16-2本 L=440


⑨D16-2本 L=440

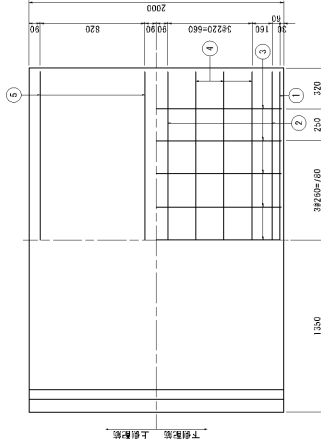

側面図



側面図





ワイドフレーム H1500xB2600

3=1/20

鉄筋加工図

①D16-2本 L=5340


②D16-4本 L=5840

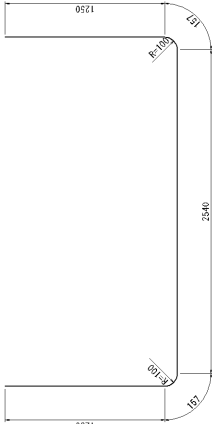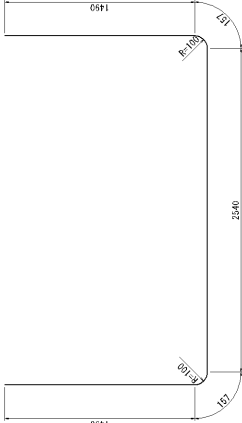

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D16	5340	2	16.723	—	SD255A
	2	D16	5840	4	36.442	—	SD255A
	3	D16	1960	9	9.878	—	SD255A
	4	D16	2740	6	9.206	—	SD255A
	5	D16	2740	4	6.138	—	SD255A
	6	φ4	1600	20	3.168	—	SD255A
筋	7	D16	1960	18	17.952	—	SD255A
	8	D16	440	8	1.971	—	SD255A
	9	φ4	150	12	0.178	—	SD255A
	10	φ4	240	6	0.154	—	SD255A
	11	D16	1860	2	2.053	—	SD255A
					102.502		
製品重量				3054	kg		

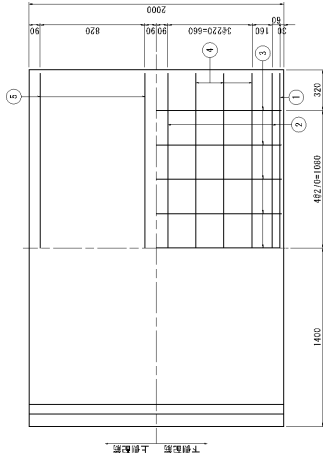


③D16-3本 L=1960

④D16-4本 L=2740


⑤D16-4本 L=2740

⑥φ4-20本 L=1600


⑦D16-4本 L=1860



側面図




側面図




ワイドフレーム H1500xB2700

S=1:20


鉄筋加工図

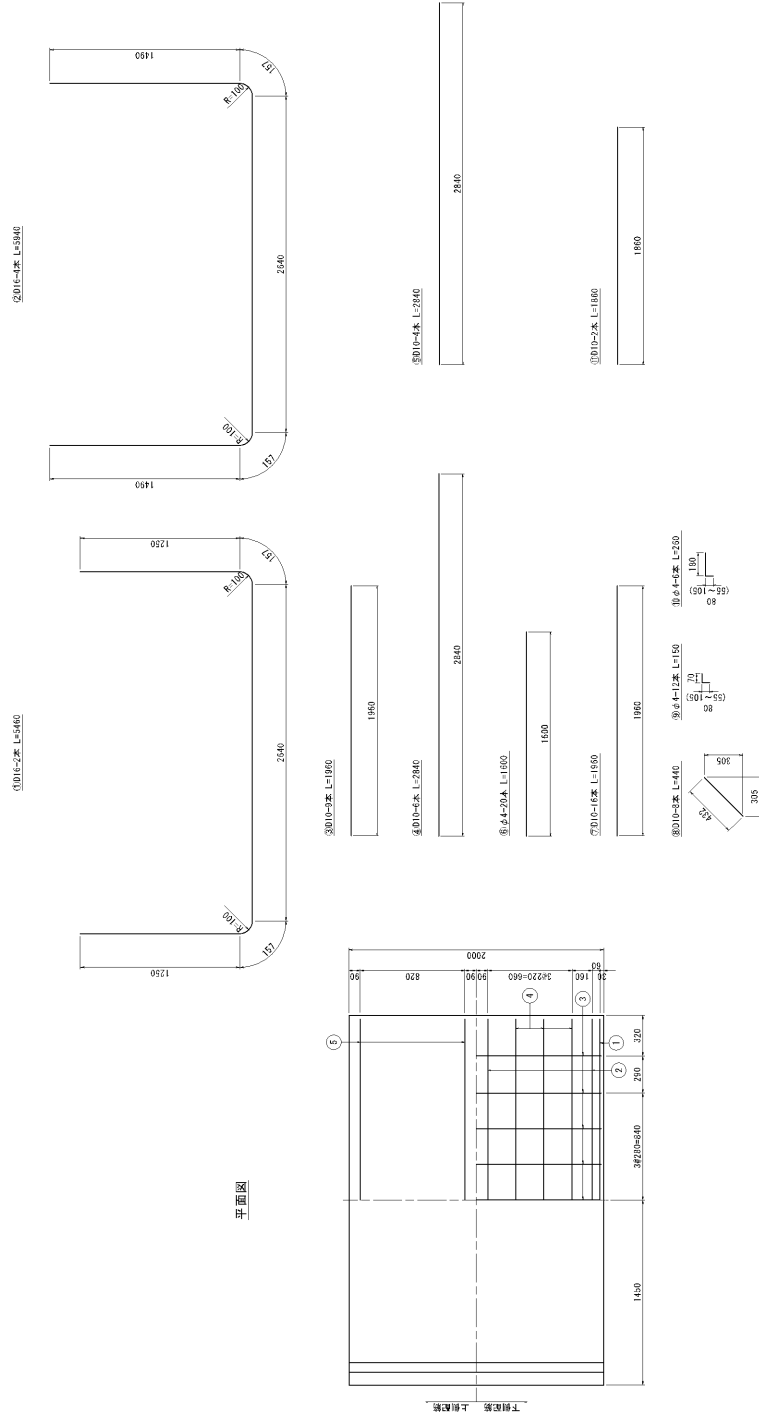


側面図



断面図

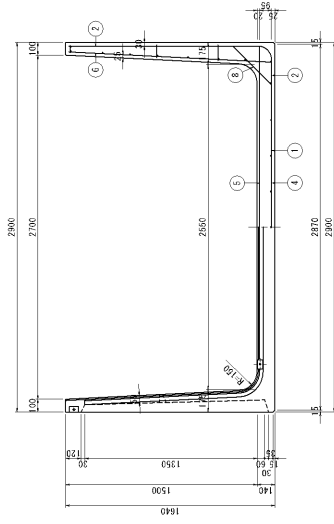

側面図



材料表 (一本当り)

類別	N ^o	型	質	之	數量	每式	材質
鋼	1	D15	5400	2	17,035	—	SJ255A
	2	D15	5400	4	37,566	—	SJ255A
	3	D10	1666	5	9,878	—	SJ255A
	4	D10	2840	6	9,342	—	SJ255A
	5	D10	2840	4	9,362	—	SJ255A
鋁	6	64	1600	20	2,188	—	SJ255A
	7	D10	1660	18	17,482	—	SJ255A
	8	D10	440	8	1,711	—	SJ255A
	9	64	150	12	0,719	—	SJ255A
	10	64	266	6	0,154	—	SJ255A
	11	D10	1660	2	2,893	—	SJ255A
計					104,899		



ワイドフレーム H1500xB2900

3-1 120

鉄筋加工図

①D15-2本 L=5640


②D15-2本 L=5640

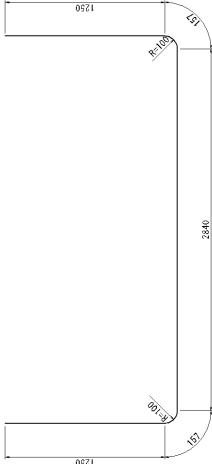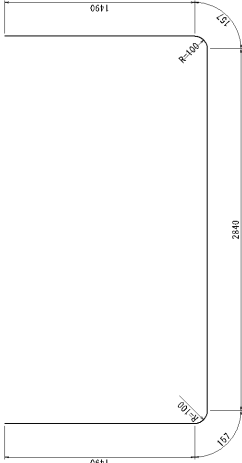

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	巻数	形状	材質
鉄	1	D15	6660	2	17.659	—	S32B5A
	2	D15	6140	4	38.314	—	S32B5A
	3	D10	1960	10	10.976	—	S32B5A
	4	D10	3040	6	10.214	—	S32B5A
	5	D10	3040	4	6.810	—	S32B5A
	6	φ4	1600	20	3.168	—	S32B5A
筋	7	D10	1960	18	17.562	—	S32B5A
	8	D10	440	8	1.971	—	S32B5A
	9	φ4	150	12	0.178	—	S32B5A
	10	φ4	260	6	0.154	—	S32B5A
	11	D10	1800	2	2.053	—	S32B5A
				計	109.629		
製品重量				3232	kg		

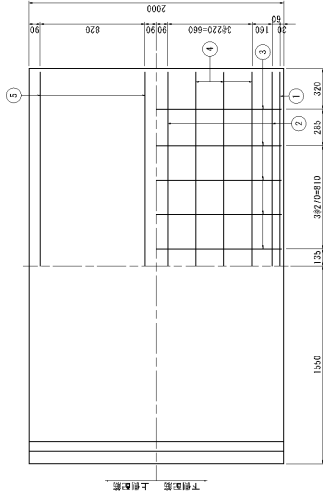

③D15-4本 L=1800

③D15-4本 L=3640

③D15-4本 L=3640

③D15-4本 L=1800

③D15-4本 L=1800

③D15-4本 L=2300

③D15-4本 L=1150

③D15-4本 L=440

③D15-4本 L=1150

③D15-4本 L=2300

③D15-4本 L=1150

③D15-4本 L=440

③D15-4本 L=1150

③D15-4本 L=2300


③D15-4本 L=1150

③D15-4本 L=440


③D15-4本 L=1150

③D15-4本 L=2300


側面図



断面図

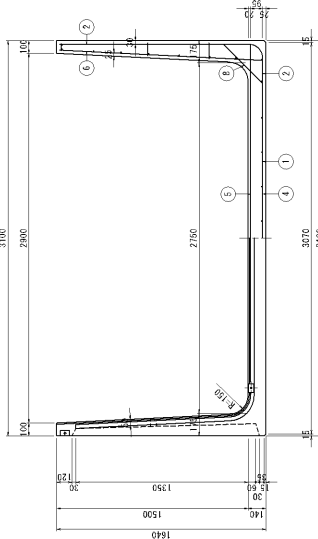

側面図




ワイドフレーム H1500xB3000

3=120

鉄筋加工図

①B16-2本 L=5760


②B16-4本 L=8240

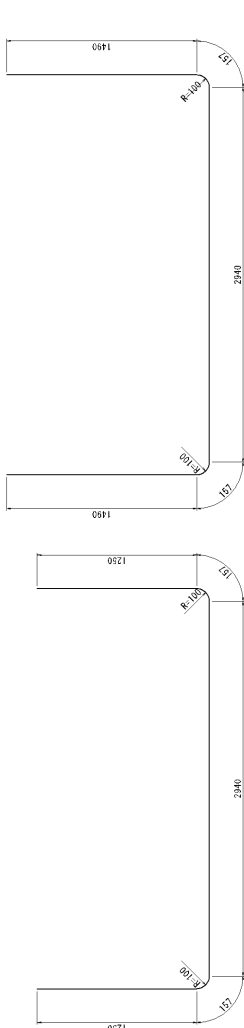

平面図

材料表 (一本当り)

種類	No.	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D16	5760	2	17.971	—	S52DSA
	2	D16	6240	4	38.938	—	S52DSA
	3	D16	1660	10	10.976	—	S52DSA
	4	D16	3140	6	10.500	—	S52DSA
	5	D16	3140	4	7.634	—	S52DSA
	6	φ4	1660	20	3.168	—	S52DSA
筋	7	D16	1660	18	17.952	—	S52DSA
	8	D16	440	8	1.971	—	S52DSA
	9	φ4	150	12	0.178	—	S52DSA
	10	φ4	260	6	0.134	—	S52DSA
	11	D16	1660	2	2.053	—	S52DSA
				計	110.335		
製品重量				3323	kg		

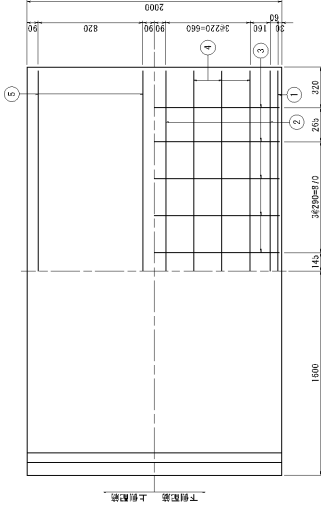

上側配筋 下側配筋


③D16-10本 L=1860

④D16-4本 L=3140


⑤D16-20本 L=1860

⑥D16-4本 L=3140


⑦D16-2本 L=1860




側面図



断面図

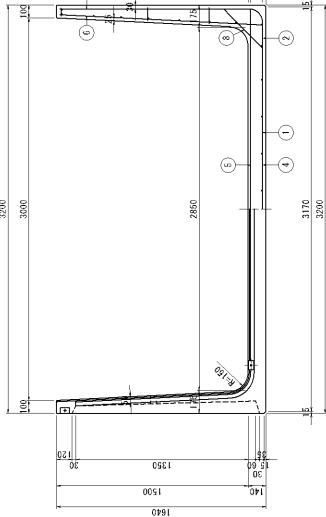

側面図




ワイドフリューム H500xB300

S=1:10


材 料 表 (一本当り)

種別	N o	径	長 (mm)	本数	重 量 (kg)	形 状	材 質
鉄筋	1	D10	1170	2	1.310	┐	S295A
	2	D10	1400	4	3.136	┐	S295A
	3	D6	1960	3	1.464	┐	S295A
	4	D6	370	8	0.737	┐	S295A
	5	-	-	-	-	-	-
	6	φ4	530	24	1.259	┐	S295A
	7	D6	1960	8	3.904	┐	S295A
	8	D10	160	8	0.717	┐	S295A
	9	φ4	105	8	0.083	┐	S295A
	10	φ4	210	4	0.083	┐	S295A
	11	D10	1860	2	2.083	┐	S295A
	計				14.776		
製品質量			374	kg			


平面図

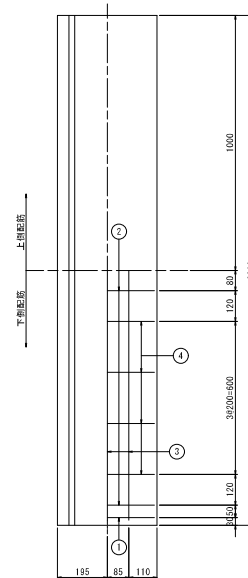


鉄筋加工図

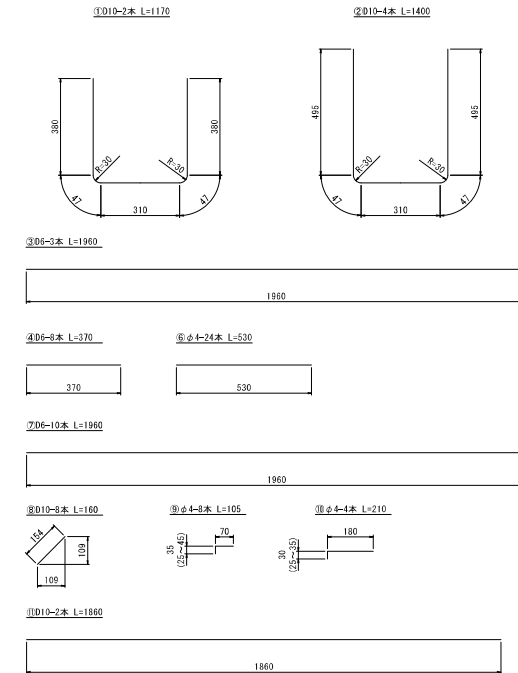


側面図

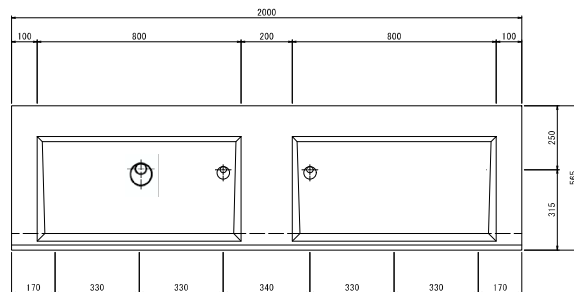

断面図



側面図

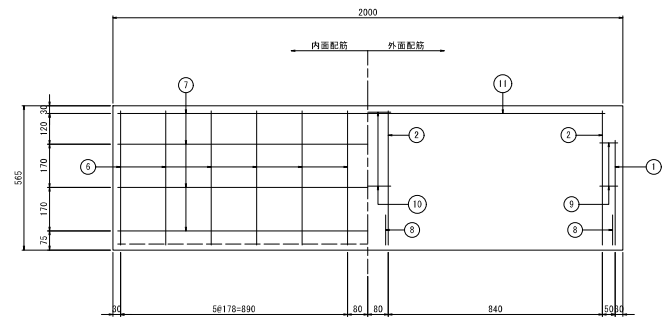


ワイドフリューム H500xB300

S=1:10


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形 状	材 質
鉄 筋	1	D10	1170	2	1.310	┐	S420SA
	2	D10	1400	4	3.136	┐	S420SA
	3	D6	1960	3	1.464	┐	S420SA
	4	D6	370	8	0.737	┐	S420SA
	5	-	-	-	-	-	-
	6	φ4	530	24	1.259	┐	S420SA
	7	D6	1960	8	3.904	┐	S420SA
	8	D10	160	8	0.717	┐	S420SA
	9	φ4	105	8	0.063	┐	S420SA
	10	φ4	210	4	0.063	┐	S420SA
	11	D10	1860	2	2.083	┐	S420SA
計					14.776		
製品重量				374	kg		


平面図

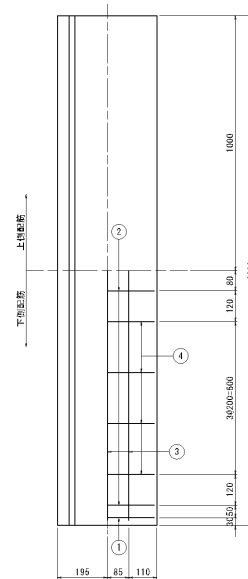


鉄筋加工図

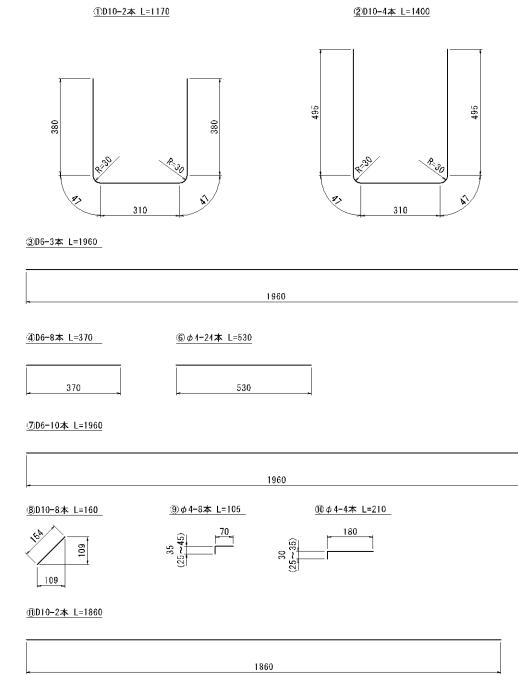


側面図

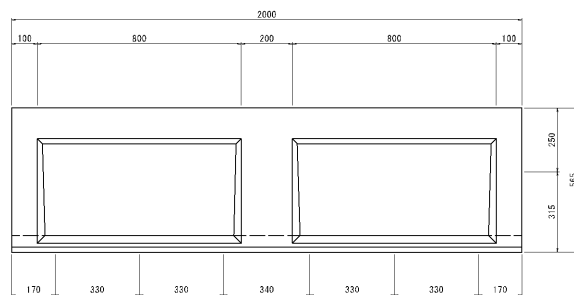

断面図



側面図

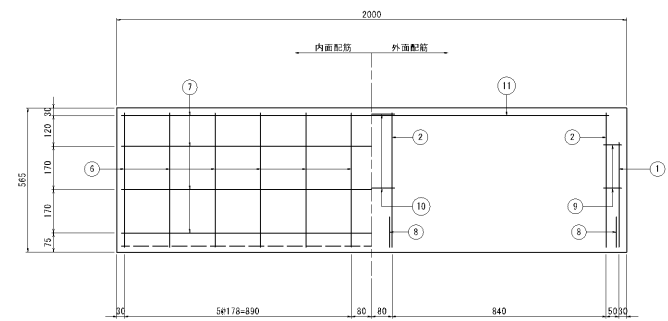

$$S=1:10$$

種別	No	径 (mm)	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D10	1370	2	1.534	┌┐	S020SA
	2	D10	1600	4	3.584	┌┐	S020SA
	3	D6	1960	3	1.464	┌┐	S020SA
	4	D6	570	8	1.135	┌┐	S020SA
	5	-	-	-	-	-	-
	6	φ4	530	24	1.259	┌┐	S020SA
	7	D6	1960	8	3.904	┌┐	S020SA
	8	D10	160	8	0.717	┌┐	S020SA
	9	φ4	195	8	0.963	┌┐	S020SA
	10	φ4	210	4	0.963	┌┐	S020SA
	11	D10	1960	2	2.963	┌┐	S020SA
筋							
計					15.546		
製品番号		436	kg				

Technical drawing of a rectangular table. The top view shows a rectangle with a total width of 2000 and a total depth of 1000. The width is divided into segments of 100, 800, 200, 800, and 100. The depth is divided into segments of 170, 330, 330, 340, 330, 330, and 170. The side view shows a rectangle with a total width of 2000 and a total depth of 1000. The width is divided into segments of 100, 800, 200, 800, and 100. The depth is divided into segments of 170, 330, 330, 340, 330, 330, and 170. The side view also shows a total height of 250, with a segment of 315 and a segment of 35.

Technical drawing of a U-shaped component. The drawing shows a cross-section of the component with various dimensions and labels. The overall width is 620 mm, and the overall height is 565 mm. The component has a central vertical section and two horizontal sections. The central vertical section has a width of 80 mm at the top and 85 mm at the bottom. The horizontal sections have a width of 500 mm. The component is labeled with numbers 1 through 6, indicating different parts or features. The drawing also shows a radius of R=50 at the bottom corner. The component is shown in a perspective view, with a top view and a side view. The top view shows the component's width and height, while the side view shows its profile. The drawing is a technical drawing, likely for manufacturing purposes.

Technical drawings of various L-shaped and stepped profiles with dimensions and labels:

- ⑩10-2本 L=1370**: L-shaped profile with vertical leg height 380, horizontal leg width 510, and corner radius R=30. The bottom flange has a width of 47.
- ⑫10-4本 L=1600**: L-shaped profile with vertical leg height 495, horizontal leg width 510, and corner radius R=30. The bottom flange has a width of 47.
- ③05-3本 L=1960**: A long, thin horizontal profile with a total length of 1960.
- ④06-8本 L=570**: A horizontal profile with a total length of 570.
- ⑤04-24本 L=530**: A horizontal profile with a total length of 530.
- ⑦06-10本 L=1960**: A long, thin horizontal profile with a total length of 1960.
- ⑧010-8本 L=160**: A stepped profile with a total length of 160. It has a vertical leg of height 150, a horizontal base of width 100, and a top flange of width 100.
- ⑨04-6本 L=105**: A stepped profile with a total length of 105. It has a vertical leg of height 15, a horizontal base of width 25, and a top flange of width 70.
- ⑪04-4本 L=210**: A stepped profile with a total length of 210. It has a vertical leg of height 20, a horizontal base of width 25, and a top flange of width 180.
- ⑪10-2本 L=1860**: A long, thin horizontal profile with a total length of 1860.

[illegible]


ワイドフリューム H500xB800

S=1:10


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D10	1670	2	1.870	┐	S420SA
	2	D10	1900	4	4.256	┐	S420SA
	3	D6	1960	4	1.962	┐	S420SA
	4	D6	870	8	1.733	┐	S420SA
	5	-	-	-	-	-	-
	6	φ4	530	24	1.259	┐	S420SA
	7	D6	1960	8	3.904	┐	S420SA
	8	D10	160	8	0.717	┐	S420SA
	9	φ4	105	8	0.063	┐	S420SA
	10	φ4	210	4	0.063	┐	S420SA
	11	D10	1860	2	2.083	┐	S420SA
計					17.940		
製品重量		527	kg				


平面図

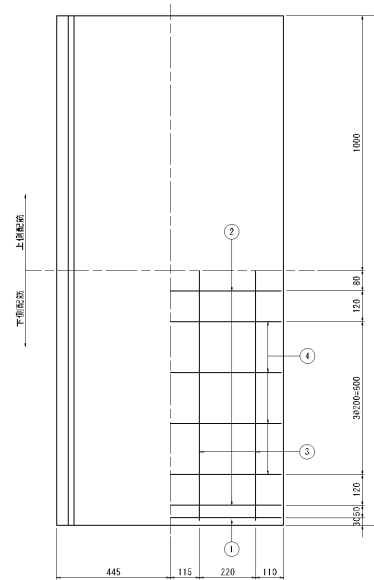


側面図

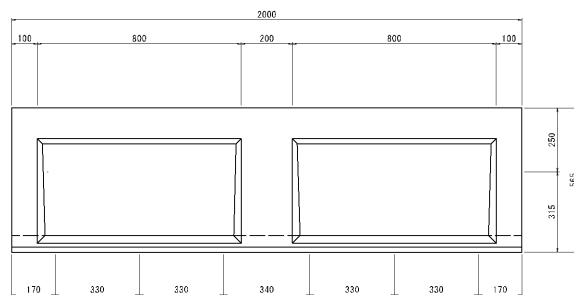


断面図

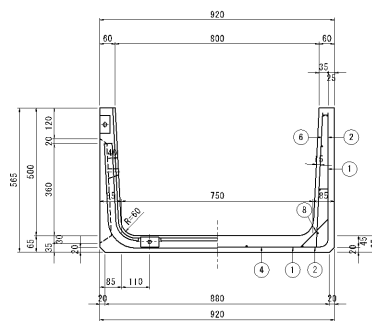

鉄筋加工図

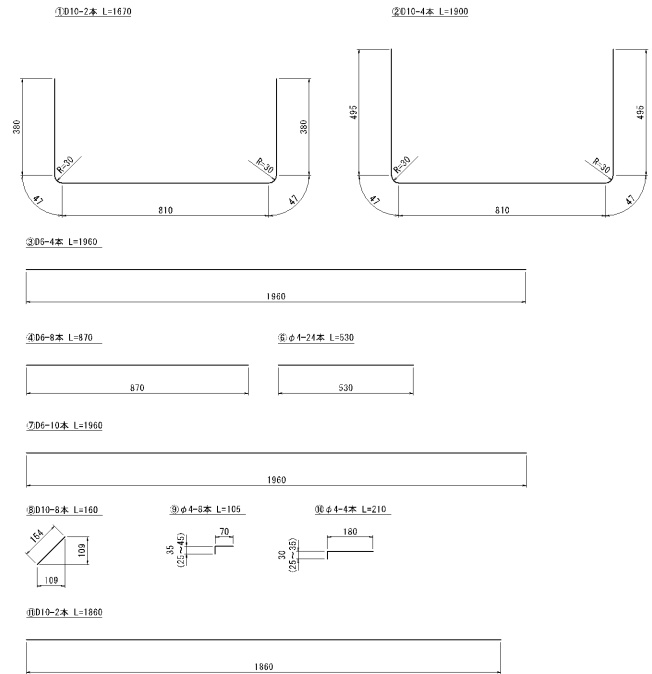

側面図

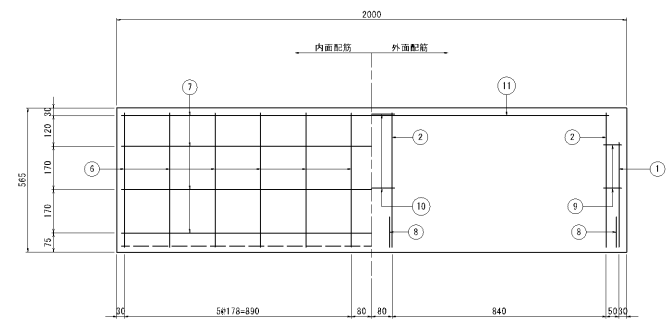


$S=1:10$

種別	N	口径	長さ	本数	重量 (kg)	形状	材質
鉄	1	D10	1590	2	1.781	—	SD35JA
	2	D10	1820	4	4.077	—	SD35JA
	3	D6	1960	3	1.464	—	SD35JA
	4	D6	600	8	1.195	—	SD35JA
	5	—	—	—	—	—	—
	6	φ4	640	24	1.521	—	SD35JA
	7	D6	1960	10	4.580	—	SD35JA
	8	D10	159	8	0.672	—	SD35JA
	9	φ4	105	8	0.083	—	SD35JA
	10	φ4	215	4	0.085	—	SD35JA
筋	11	D10	1880	2	2.083	—	SD35JA
計					17.841		
製品質量			493	kg			


Technical drawing of a rectangular table with dimensions. The top view shows a total width of 2000 mm, divided into segments of 100, 800, 200, 800, and 100 mm. The side view shows a total depth of 330 mm, with a 365 mm section for the table top and a 330 mm section for the legs. The bottom view shows a total width of 2000 mm, divided into segments of 170, 330, 330, 340, 330, 330, and 170 mm.

Technical drawing of a U-shaped channel cross-section. The overall width is 670 mm, with a top flange width of 60 mm and a bottom flange width of 15 mm. The overall height is 655 mm, with a top flange height of 60 mm and a bottom flange height of 15 mm. The channel depth is 450 mm. The drawing shows reinforcement details with bars numbered 1 through 6. Dimensions for reinforcement placement are given as 110 mm for the bottom flange and 40 mm for the channel walls. The drawing is labeled with '1:1' and '1/1'.


①D10-2本 L=1590




2010-4本 L=1820




③06-3本 L=1960




④ D6-8本 L=600



⑥ $\phi 4-24$ 本 L=640



⑦06-12本 L=1960



⑧D10-8本 L=150




⑤ $\phi 4-8$ 木 L=105



⑩ $\phi 4-4$ 木 L=215



010-2本 L=1860



$S=1:10$

種別	No	径	長さ (mm)	本数	重量 (kg)	形状	材質	
鉄	1	D10	1690	2	1.893		S0735A	
	2	D10	1920	4	4.301		S0735A	
	3	D6	1960	3	1.464		S0735A	
	4	D6	700	8	1.594		S0735A	
	5	-	-	-	-		-	-
	6	φ4	640	24	1.521		S0735A	
	7	D6	1960	10	4.980		S0735A	
	8	D10	150	8	0.672		S0735A	
	9	φ4	105	8	0.083		S0735A	
	10	φ4	215	4	0.085		S0735A	
筋	11	D10	1860	2	2.083	S0735A		
	計				18.376			
製品質量				524	kg			

Technical drawing of a vertical section of a wall or partition. The drawing shows a cross-section with various layers and dimensions. Dimensions are given in millimeters (mm). The total height is 1800 mm. The total width is 360 mm. The drawing is divided into an upper section (upper part) and a lower section (lower part) by a horizontal dashed line. The lower section is further divided into three vertical zones: a central zone (width 235 mm) and two side zones (width 105 mm each). The central zone contains a grid of horizontal and vertical lines. Dimensions for the central zone are: 129 mm for the top part, 80 mm for the middle part, and 129 mm for the bottom part. The side zones have dimensions of 205 mm and 129 mm. The drawing is labeled with numbers 1, 2, 3, and 4. 1 is at the bottom center, 2 is at the top center, 3 is on the right side, and 4 is on the right side.


Technical drawing of a rectangular table with dimensions:

- Overall width: 2000
- Overall depth: 625
- Overall height: 365
- Central panel width: 800
- Central panel height: 330
- Side panel width: 100
- Side panel height: 330
- Base width: 170
- Central support width: 340


Technical drawing of a U-shaped concrete structure, likely a foundation or retaining wall. The drawing shows the plan view with dimensions and reinforcement details. The overall width is 720, and the overall height is 605. The structure has a U-shape with a central horizontal section and two vertical sections. The dimensions are as follows:

- Overall width: 720
- Overall height: 605
- Top horizontal section width: 600
- Top horizontal section height: 80
- Vertical section height: 460
- Vertical section width: 40
- Central horizontal section width: 550
- Central horizontal section height: 40
- Bottom horizontal section width: 712
- Bottom horizontal section height: 80
- Reinforcement details: The drawing shows various reinforcement bars and stirrups, labeled with numbers 1 through 8. The reinforcement is distributed throughout the structure, including the vertical sections, the central horizontal section, and the bottom horizontal section.


①D10-2本 L=1690



②010-4本 L=1920



③06-3本 L=1960



④ D6-8本 L=700



⑥: $\phi 4-24$ 本 L=640



⑦D6-12本 L=1960



⑧D10-8本 L=150




⑤ $\phi 4-8$ 木 L=10



⑩ $\phi 4-4$ 木 L=215



DD10-2本 L=1860

[illegible]


ワイドフリューム H600xB700

S=1:10


材 料 表 (一本当り)

種別	No	役	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D10	1790	2	2.005	┐┐	SD795A
	2	D10	2020	4	4.525	┐┐	SD795A
	3	D6	1950	4	1.952	┐┐	SD795A
	4	D6	800	8	1.594	┐┐	SD795A
	5	-	-	-	-	┐┐	-
	6	φ4	640	24	1.521	┐┐	SD795A
	7	D6	1950	10	4.880	┐┐	SD795A
	8	D10	150	8	0.672	┐┐	SD795A
	9	φ4	105	8	0.083	┐┐	SD795A
	10	φ4	215	4	0.085	┐┐	SD795A
	11	D10	1860	2	2.083	┐┐	SD795A
計					19.400		
製品重量			554	kg			


平面図

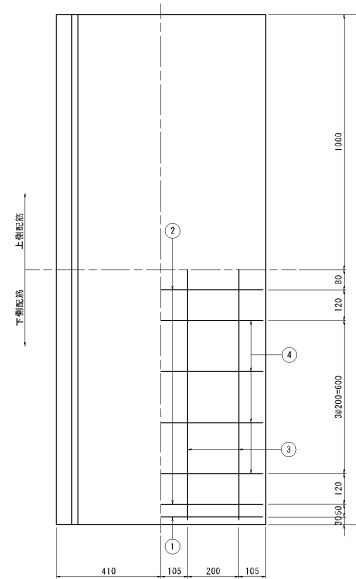

側面図

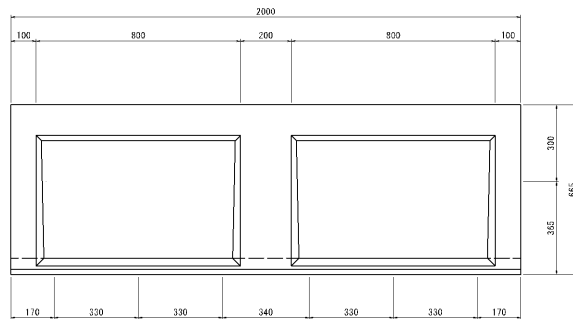


断面図

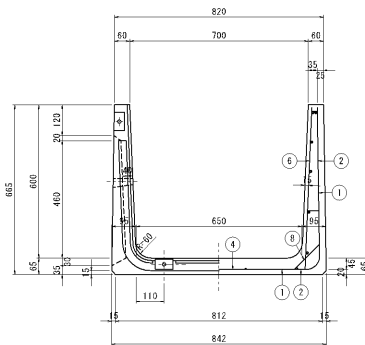


鉄筋加工図


①D10-2本 L=1790




②D10-4本 L=2020




③D6-4本 L=1950




④D6-8本 L=800



⑤φ4-24本 L=640



⑦D6-12本 L=1860



⑧D10-8本 L=150




⑨φ4-8本 L=105




⑩φ4-4本 L=215



⑪D10-2本 L=1860



側面図

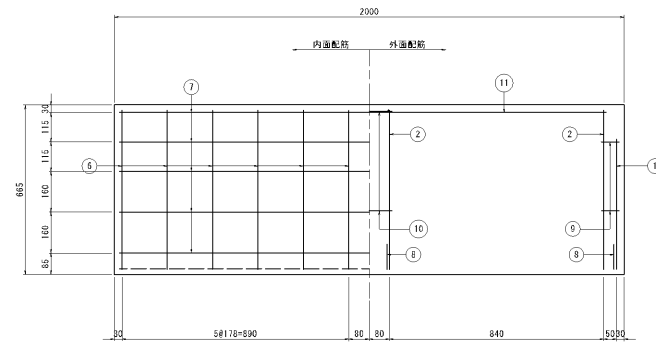

$S=1:10$

種別	No	径 (mm)	長さ	本数	重量 (kg)	形状	材質
鉄	1	D10	2190	2	2.453	┌┐	S70YSA
	2	D10	2420	4	5.421	┌┐	S70YSA
	3	D6	1950	5	2.440	┌┐	S70YSA
	4	D6	1200	8	2.390	┌┐	S70YSA
	5	-	-	-	-	-	-
	6	φ4	640	24	1.321	┌┐	S70YSA
	7	D8	1950	10	4.880	┌┐	S70YSA
	8	D10	150	8	0.672	┌┐	S70YSA
	9	φ4	105	8	0.083	┌┐	S70YSA
	10	φ4	215	4	0.085	┌┐	S70YSA
	11	D10	1680	2	2.083	┌┐	S70YSA
筋							
計					22.028		
製品質量		676	kg				

Technical drawing of a window frame assembly in section. The drawing shows a cross-section of a window with a grid pattern. Key dimensions include a total width of 610, a central grid width of 252.5, and a right-side section width of 105. The height is divided into three sections: 120 at the top, 3820 in the middle, and 120 at the bottom. Labels 1, 2, 3, and 4 point to specific components of the frame and grid. A dashed line indicates the center of the grid. The drawing is labeled "上侧视图" (Top Side View) and "下侧视图" (Bottom Side View) on the left side.

Technical drawing of a double-door cabinet. The top view shows a total width of 2000 mm, divided into segments of 100, 800, 200, 800, and 100 mm. The side view shows a total height of 330 mm, with a door height of 305 mm. The front view shows two doors, each with a width of 800 mm and a height of 305 mm. The base of the cabinet is 330 mm high. The bottom view shows a total width of 2000 mm, divided into segments of 170, 330, 330, 340, 330, 330, and 170 mm.

[illegible]

①D10-2本 L=2190

②010-4本 L=2420

③06-5本 L=1960

④D6-8本 L=1200

⑥ $\phi 4-24$ 本 L=640

⑦D6-12本 L=1960


⑧D10-8本 L=150

⑤ $\phi 4-8$ 木 L=105

⑩ $\phi 4-4$ 木 L=215

010-2本 L=1860





側面図

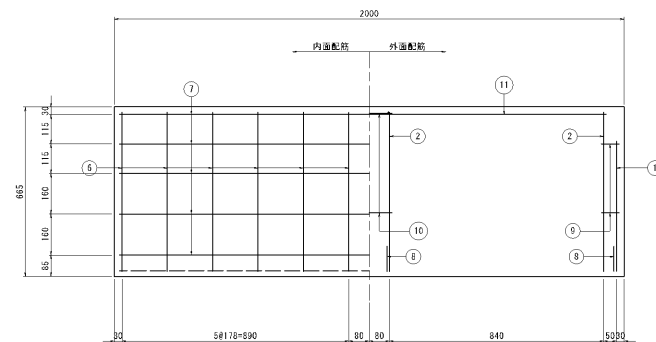


ワイドフリューム H700xB500

S=1:16


鉄筋加工図

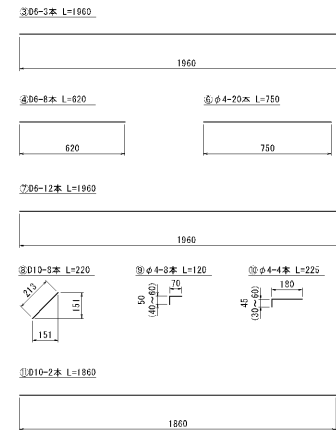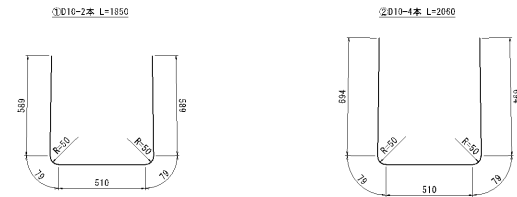


平面図

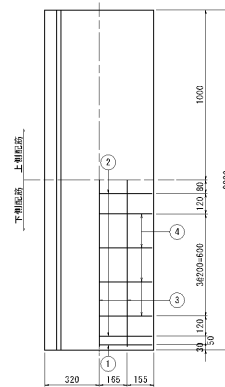

断面図




側面図

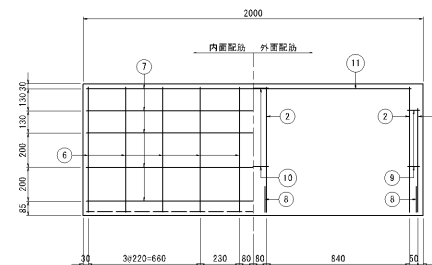

材 料 表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D10	1850	2	2.072	U	SD195A
2	D10	2060	4	4.614	U	SD195A
3	D6	1960	3	1.454	U	SD195A
4	D6	620	8	1.235	U	SD195A
5	-	-	-	-	-	-
6	φ4	750	20	1.405	U	SD195A
7	D6	1960	10	4.000	U	SD195A
8	D10	220	8	0.966	U	SD195A
9	φ4	120	8	0.095	U	SD195A
10	φ4	225	4	0.089	U	SD195A
11	D10	1860	2	2.063	U	SD195A
計				19.003		
製品質量		621	kg			



側面図

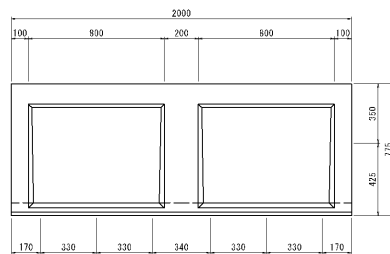


ワイドフリューム H700xB600

S=1:15


鉄筋加工図

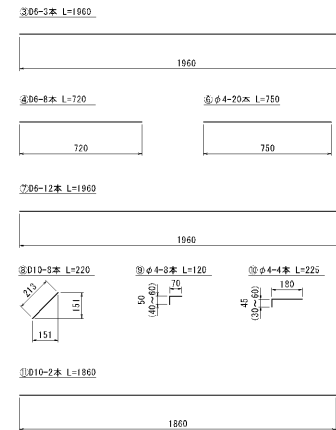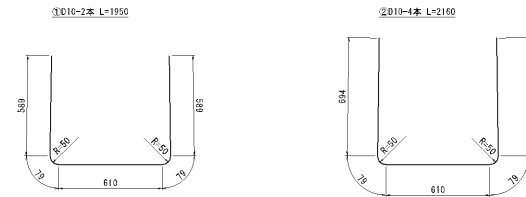


平面図

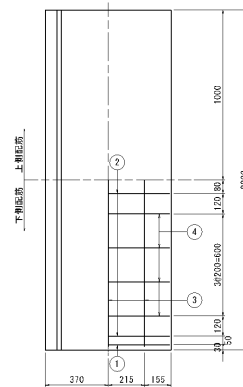


断面図



側面図

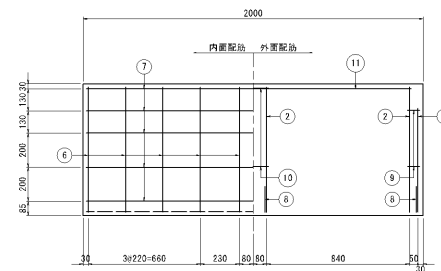

側面図

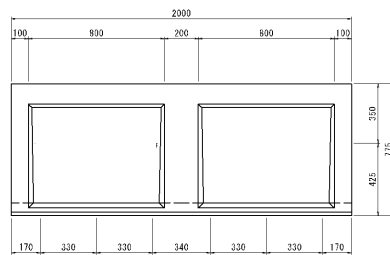


材 料 表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D10	1950	2	2.184	└┐	SD195A
2	D10	2160	4	4.838	└┐	SD195A
3	D6	1960	3	1.464	—	SD195A
4	D6	720	8	1.434	—	SD195A
5	—	—	—	—	—	—
6	φ4	750	20	1.405	—	SD195A
7	D6	1960	10	4.000	—	SD195A
8	D10	220	8	0.966	—	SD195A
9	φ4	120	8	0.095	—	SD195A
10	φ4	225	4	0.089	—	SD195A
11	D10	1860	2	2.063	—	SD195A
計				19.538		
製品重量		656	kg			


ワイドフリューム H700xB700

S=1:16


鉄筋加工図

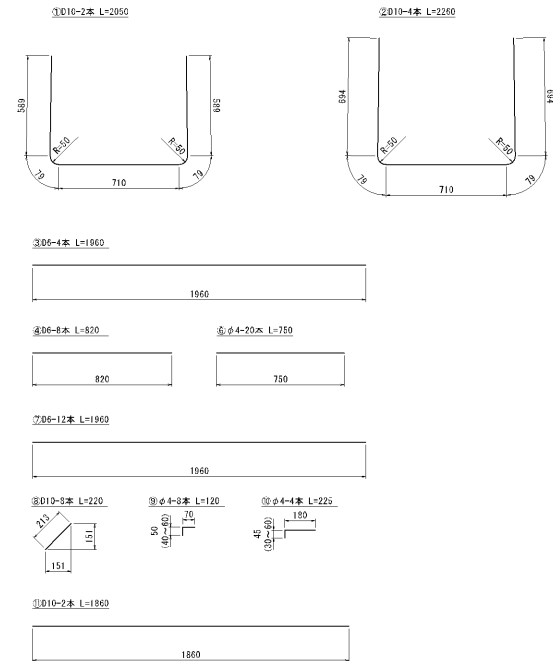


平面図

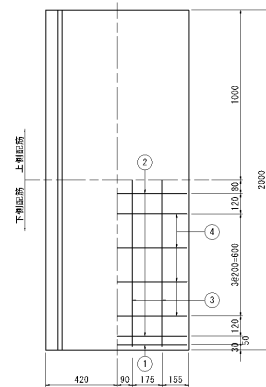


断面図



側面図

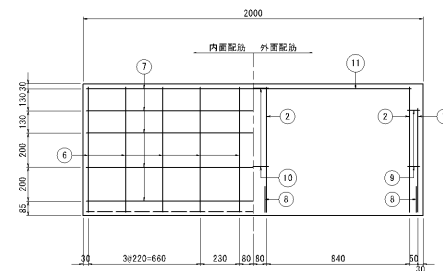

側面図

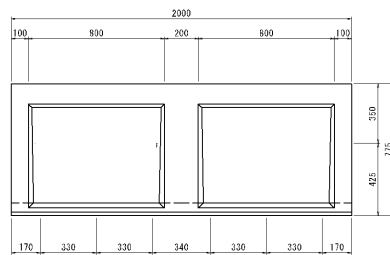


材料表 (一本当り)

種別	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄 筋	1	D10	2050	2	2.296	┌┐	SD19SA
	2	D10	2250	4	5.052	┌┐	SD19SA
	3	D6	1960	4	1.952		SD19SA
	4	D6	820	8	1.633		SD19SA
	5	-	-	-	-		-
	6	φ4	750	20	1.405		SD19SA
	7	D6	1960	10	4.000		SD19SA
	8	D10	220	8	0.966		SD19SA
	9	φ4	120	8	0.095		SD19SA
	10	φ4	225	4	0.089		SD19SA
	11	D10	1860	2	2.063		SD19SA
計					20.561		
製品重量				692	kg		

S=1:16

①D13-2本 L=2100

②013-4本 L=2420

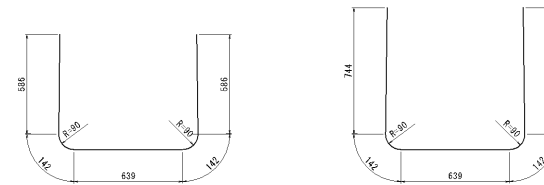



③06-3本 L=1960




④06-8本 L=850




06-12本 L=1960




①010-2本 L=1860




側面図

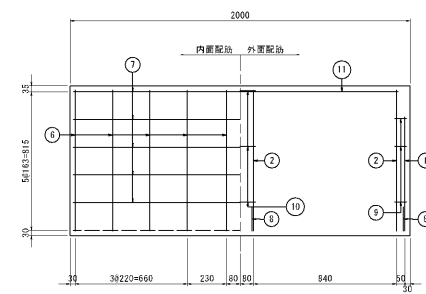


平面图

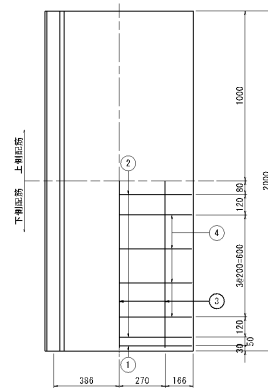

断面図



側面図

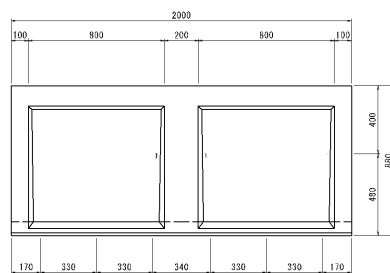


材 料 表 (一本当り)

種別	No	長さ (mm)	本数	重量 (kg)	形状	材質
鉄	1	D13 2100	2	4.179	┌┐	S275S4
	2	D13 2420	4	8.632	┌┐	S275S4
	3	D6 1960	3	1.464	┌┐	S275S4
	4	D6 850	8	1.693	┌┐	S275S4
	5	-	-	-	-	-
	6	φ4 840	20	1.663	┌┐	S275S4
	7	D6 1960	10	4.880	┌┐	S275S4
	8	D10 225	8	0.986	┌┐	S275S4
	9	φ4 120	12	0.345	┌┐	S275S4
	10	φ4 230	6	0.137	┌┐	S275S4
	11	D10 1860	2	2.083	┌┐	S275S4
防						
計				26.860		
製品重量		805	kg			


ワイドフリューム H800xB800

S=1:15

鉄筋加工図

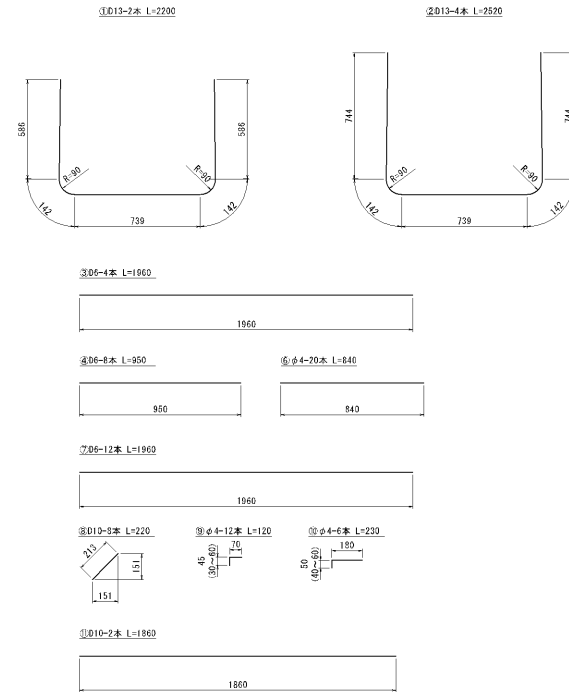


平面図

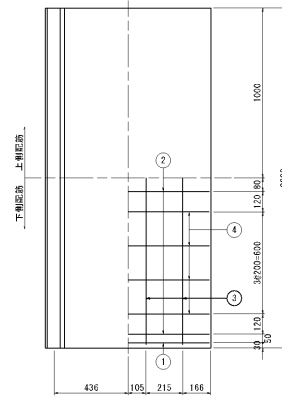


材料表 (一本当り)

種別	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄 筋	1	D13	2200	2	4.376	┌┐	SD295A
	2	D13	2520	4	10.030	┌┐	SD295A
	3	D6	1960	4	1.952	┌┐	SD295A
	4	D6	950	8	1.892	┌┐	SD295A
	5	-	-	-	-	-	-
	6	φ4	840	20	1.663	┌┐	SD295A
	7	D6	1960	10	4.880	┌┐	SD295A
	8	D10	220	8	0.986	┌┐	SD295A
	9	φ4	120	12	0.143	┌┐	SD295A
	10	φ4	230	6	0.137	┌┐	SD295A
	11	D10	1860	2	2.083	┌┐	SD295A
計					28.144		
製品重量				844	kg		


側面図

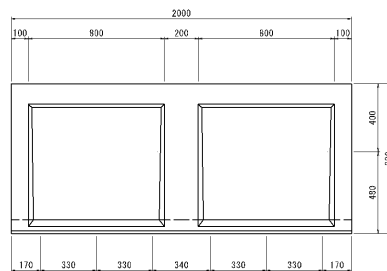

断面図




側面図

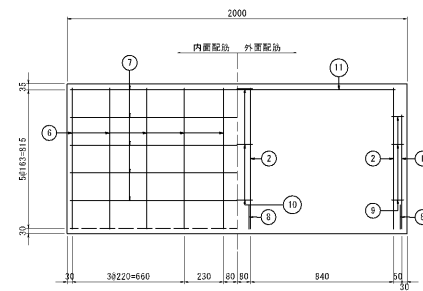


ワイドフリューム H800xB1000

S=1:15


鉄筋加工図

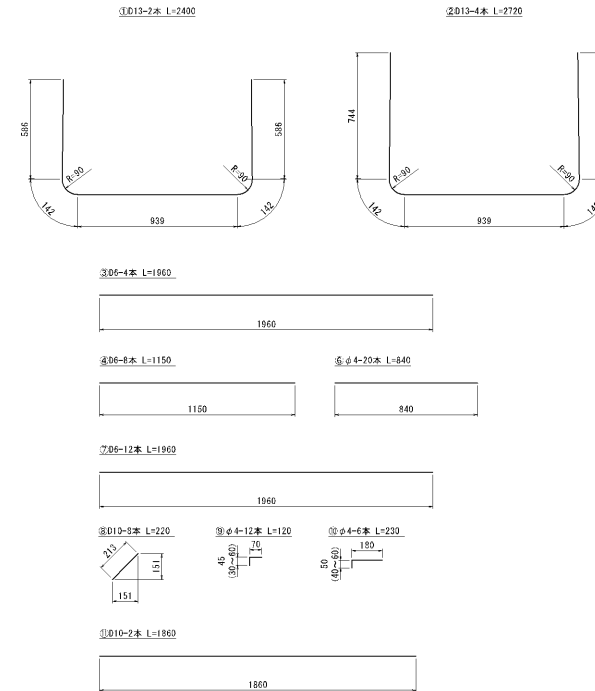


平面図

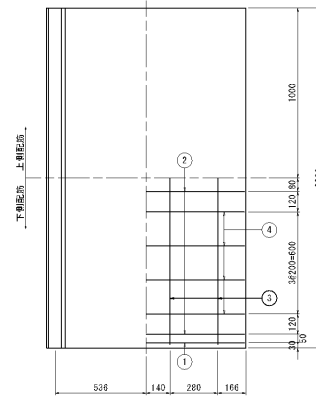


側面図

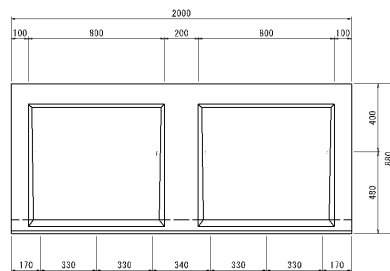

断面図



側面図

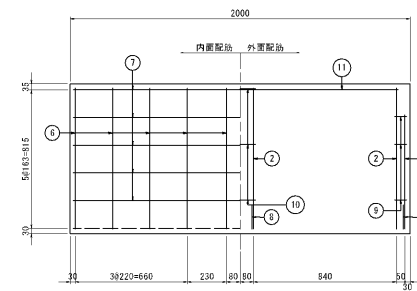


材料表 (一本当り)

種別 No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D13	2400	2	4.776	┌┐	S0295A
2	D13	2720	4	10.826	┌┐	S0295A
3	D6	1960	4	1.952	┌┐	S0295A
4	D6	1150	8	2.291	┌┐	S0295A
5	-	-	-	-	-	-
6	φ4	840	20	1.663	┌┐	S0295A
7	D6	1960	10	4.880	┌┐	S0295A
8	D10	220	8	0.986	┌┐	S0295A
9	φ4	120	12	0.143	┌┐	S0295A
10	φ4	230	6	0.137	┌┐	S0295A
11	D10	1860	2	2.083	┌┐	S0295A
計				29.737		
製品重量				919	kg	


ワイドフリューム H800xB1100

S=1:15


平面図

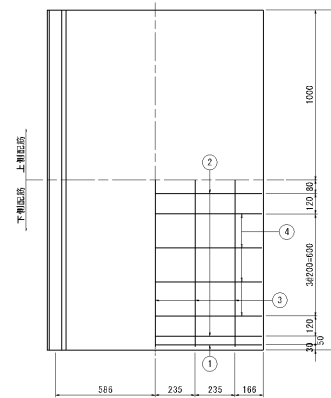


側面図

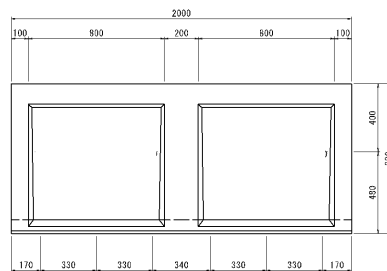

断面図



鉄筋加工図

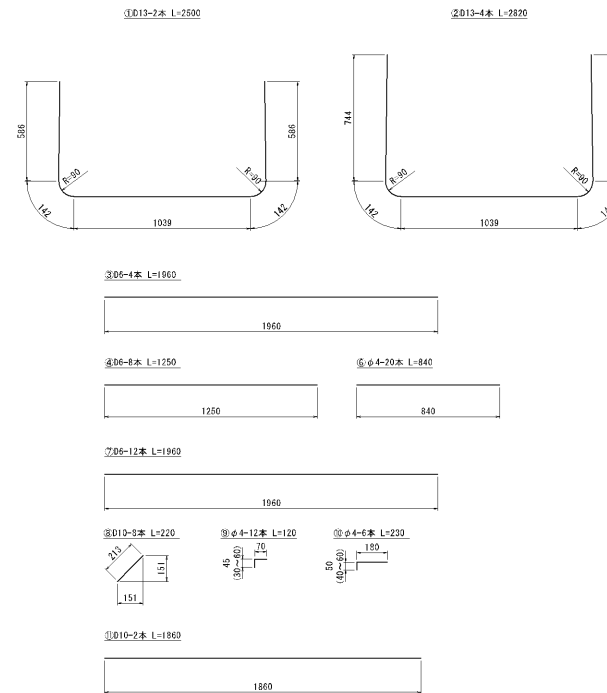



ワイドフリューム H800xB1200

S=1:15


鉄筋加工図

①D13-2本 L=2600

②D13-4本 L=2820




③D6-5本 L=1960



④D6-8本 L=1350



⑤φ4-20本 L=840




⑦D6-12本 L=1960




⑧D13-3本 L=220




⑨φ4-12本 L=120




⑩φ4-6本 L=230



⑪D10-2本 L=1860




平面図

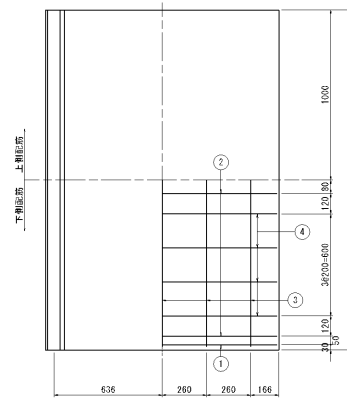


材料表 (一本当り)

種別 No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D13	2600	2	5.174	┌┐	SD295A
2	D13	2820	4	11.622	┌┐	SD295A
3	D6	1960	5	2.440	┌┐	SD295A
4	D6	1350	8	2.689	┌┐	SD295A
5	-	-	-	-	-	-
6	φ4	840	20	1.663	┌┐	SD295A
7	D6	1960	10	4.880	┌┐	SD295A
8	D10	220	8	0.986	┌┐	SD295A
9	φ4	120	12	0.143	┌┐	SD295A
10	φ4	230	6	0.137	┌┐	SD295A
11	D10	1860	2	2.083	┌┐	SD295A
計				31.917		
製品質量				994	kg	


側面図

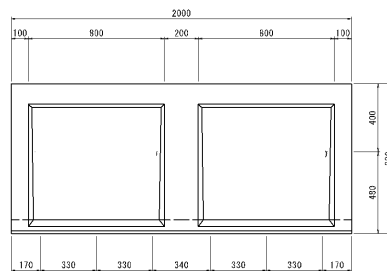

断面図

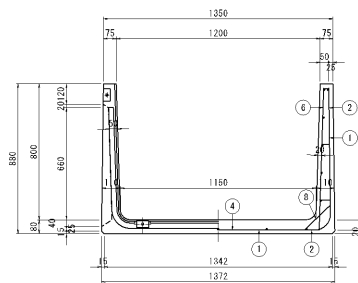

側面図

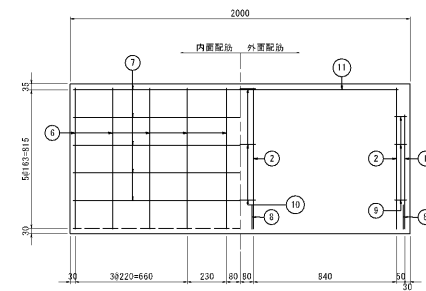



ワイドフリューム H800xB1300

S=1:16


鉄筋加工図

①D13-2本 L=2700

②D13-4本 L=3020



③D6-5本 L=1960




④D6-8本 L=1450




⑤D6-4本 L=1450



⑥φ4-20本 L=840



⑦D6-12本 L=1960



⑧D13-3本 L=220




⑨φ4-12本 L=120




⑩φ4-6本 L=230




⑪D10-2本 L=1860




平面図

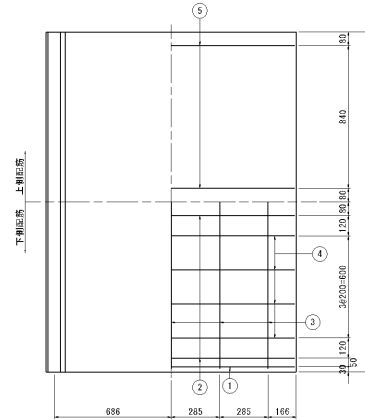


側面図

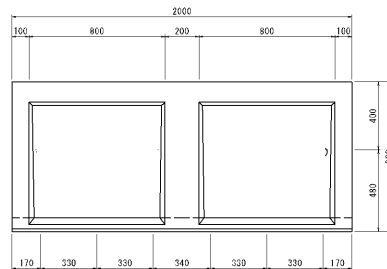

断面図

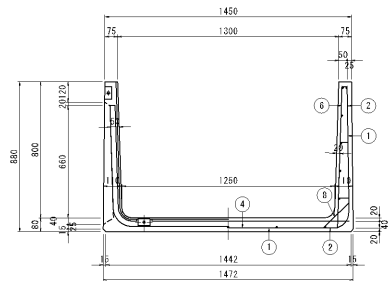

側面図

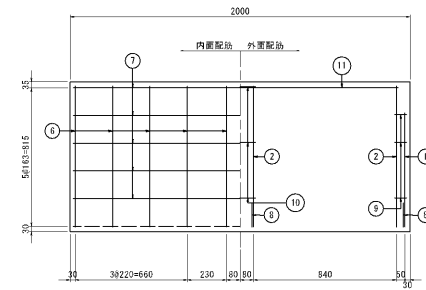


材 料 表 (一本当り)

種別No	径	長さ (mm)	本数	重量 (kg)	形状	材質
1	D13	2700	2	5.373	┌┐	SD295A
2	D13	3020	4	12.020	┌┐	SD295A
3	D6	1960	5	2.440	┌┐	SD295A
4	D6	1450	8	2.888	┌┐	SD295A
5	D6	1450	4	1.444	┌┐	SD295A
6	φ4	840	20	1.663	┌┐	SD295A
7	D6	1960	10	4.880	┌┐	SD295A
8	D10	220	8	0.986	┌┐	SD295A
9	φ4	120	12	0.143	┌┐	SD295A
10	φ4	230	6	0.137	┌┐	SD295A
11	D10	1860	2	2.083	┌┐	SD295A
計				34.057		
製品質量				1032	kg	


ワイドフリューム H900xB800

S=1:15


鉄筋加工図

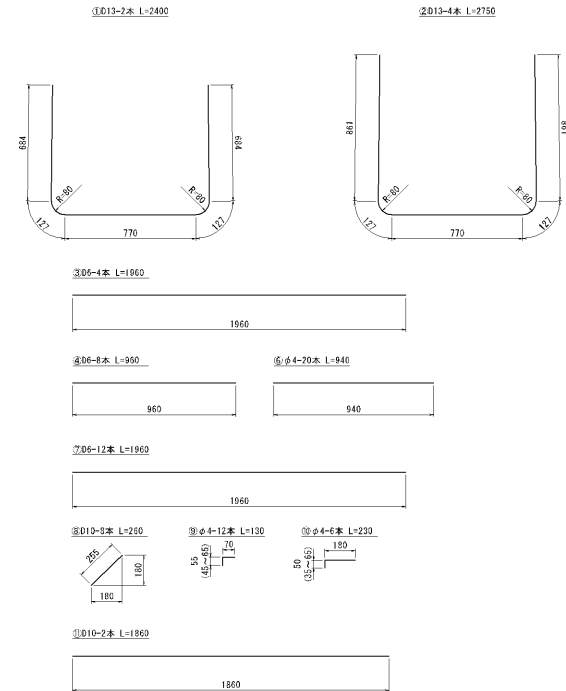


平面図

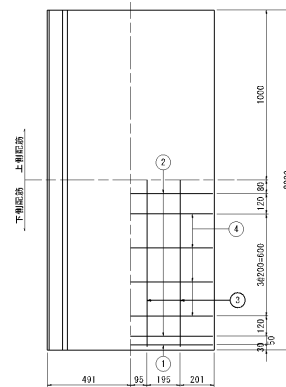


側面図

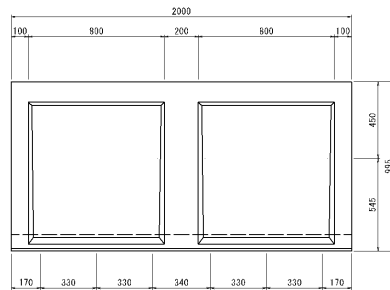

断面図



側面図

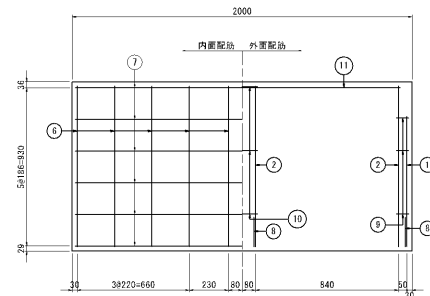

材料表 (一本当り)

種別	No	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄 筋	1	D13	2400	2	4.776	┌┐	SD295A
	2	D13	2750	4	10.945	┌┐	SD295A
	3	D6	1960	4	1.952	┌┐	SD295A
	4	D6	960	8	1.912	┌┐	SD295A
	5	-	-	-	-	-	-
	6	φ4	940	20	1.861	┌┐	SD295A
	7	D6	1960	12	5.856	┌┐	SD295A
	8	D10	260	8	1.165	┌┐	SD295A
	9	φ4	120	12	0.154	┌┐	SD295A
	10	φ4	230	6	0.137	┌┐	SD295A
	11	D10	1860	2	2.083	┌┐	SD295A
計					30.841		
製品重量			1044	kg			

S=1:16

①D13-2木 L=2600

②013-4本 L=2950



⑥ $\phi 4-20$ 本 $L=940$

⑧010-8本 L=260


⑨ $\phi 4-12$ 本 $L=130$

00·φ 4-6本 L=230



1860

下期配筋 上期配筋

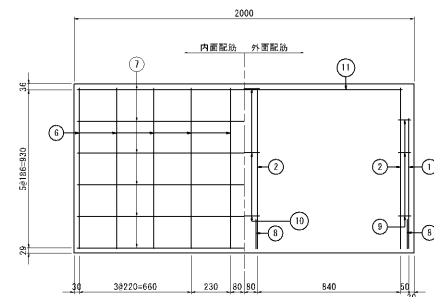

S=1:15

Technical drawing of a U-shaped part. The drawing shows a U-shaped profile with the following dimensions:

- Overall height: 900
- Overall width: 490
- Radius of the bottom corners: R-75
- Radius of the bottom corners (inner): R-10
- Radius of the bottom corners (outer): R-10

種別	No	径 (mm)	長さ (mm)	本数 (kg)	形状	材質	
鉄	1	D13	2360	2	4,696	—	S215A
	2	D13	2690	4	10,706	—	S215A
	3	D6	1960	3	1,464	—	S215A
	4	D6	670	8	1,335	—	S215A
	5	—	—	—	—	—	—
	6	φ4	1060	20	2,099	—	S215A
	7	D6	1960	14	6,833	—	S215A
	8	D10	280	8	1,254	—	S215A
	9	φ4	130	12	0,154	—	S215A
	10	φ4	240	6	0,143	—	S215A
筋	11	D10	1860	2	2,083	—	S215A
	計				30,758		
製品質量		1025		kg			

[illegible]

Figure 1 is a detailed cross-sectional diagram of a double-layered glass curtain wall. The diagram illustrates the structural components and their dimensions. The total height of the wall is 2000 mm. The width is divided into several sections: 382 mm, 20 mm, 660 mm, 230 mm, 80 mm, 80 mm, 840 mm, and 20 mm. The height is divided into sections: 35 mm, 165 mm, 501 mm, 75 mm (which is equal to 875 mm), and 90 mm. The diagram shows the internal reinforcement (内面配筋) and external reinforcement (外面配筋) of the concrete structure. Various components are labeled with circled numbers 1 through 11, indicating specific parts of the assembly such as the glass panels, mullions, and structural supports.


ワイドフリューム H1000xB1000

S=1:16


材 料 表 (一本当り)

種別	N	径	長さ (mm)	本数	重量 (kg)	形状	材質
鉄筋	1	D13	2860	2	5.691	┌	S275SA
	2	D13	3190	4	12.696	└	S275SA
	3	D6	1960	4	1.952		S275SA
	4	D6	1170	8	2.331		S275SA
	5	-	-	-	-	-	-
	6	φ4	1060	20	2.099	○	S275SA
	7	D6	1960	14	6.933		S275SA
	8	D10	280	8	1.254		S275SA
	9	φ4	130	12	0.154	○	S275SA
	10	φ4	240	6	0.143	○	S275SA
	11	D10	1860	2	2.083		S275SA
計					35.236		
製品質量				1271	kg		


平面図

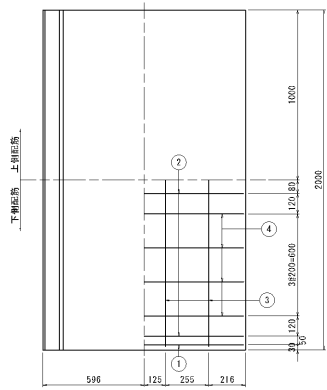


鉄筋加工図

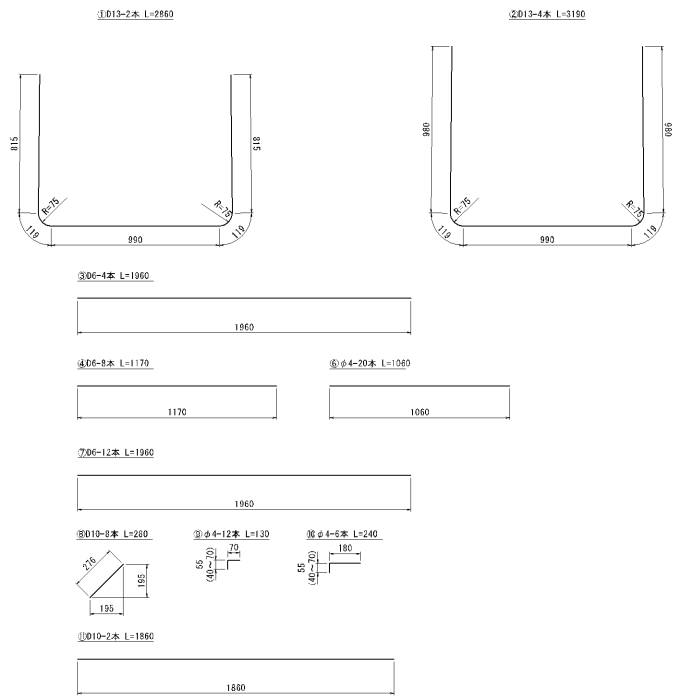


側面図

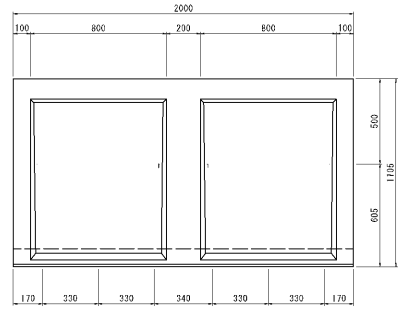

断面図



側面図

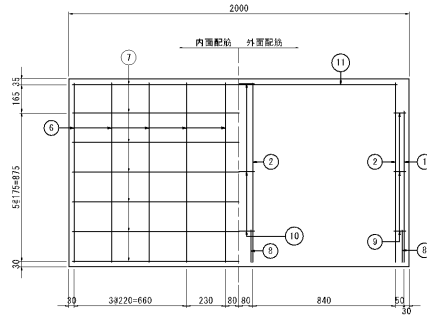


ワイドフリューム H1000xB1100

S=1:15


材 料 表 (一本当り)

種別	N	φ	径 (mm)	本数	重 量 (kg)	形 状	材 質
鉄	1	D13	2960	2	5.890	┌	S275SA
	2	D13	3290	4	13.094	└	S275SA
	3	D6	1960	5	2.440	┌	S275SA
	4	D6	1270	8	2.530	└	S275SA
	5	-	-	-	-	┌	-
	6	φ4	1060	20	2.099	└	S275SA
	7	D6	1960	14	6.833	┌	S275SA
	8	D10	780	8	1.254	└	S275SA
	9	φ4	130	12	0.154	┌	S275SA
	10	φ4	240	6	0.143	└	S275SA
	11	D10	1860	2	2.083	└	S275SA
筋							
	計				36.920		
製品質量			1321	kg			


平面図

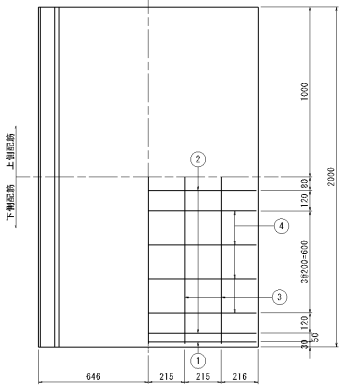


側面図

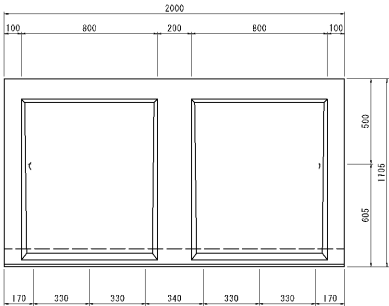


断面図

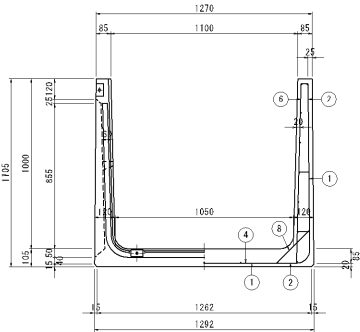

鉄筋加工図

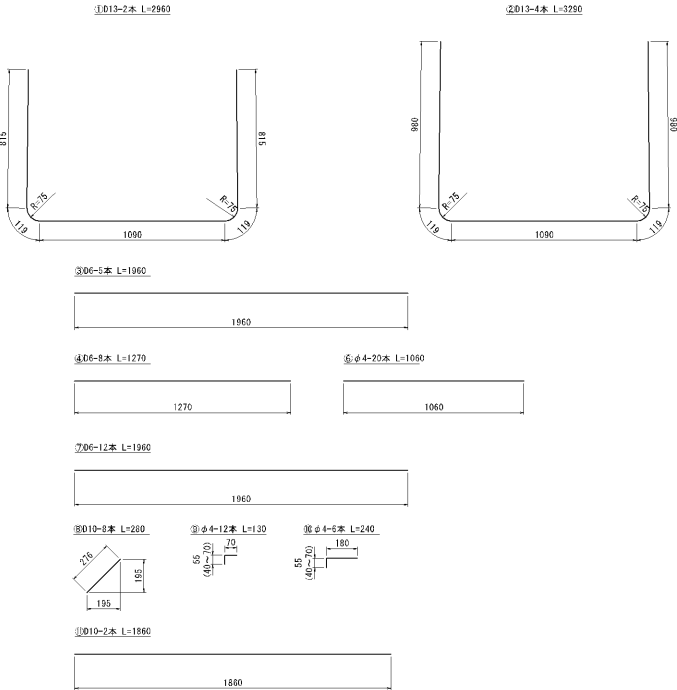

側面図

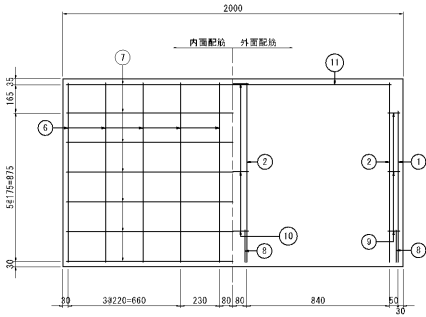

S=1:20

①D16-2木 L=3290

②D16-4木 L=3630

③D6-4木 L=1960

④D6-8木 L=1170

⑤φ4-20木 L=1260

⑦D6-16木 L=1960

⑧D10-8木 L=300

⑨φ4-12木 L=140




⑩φ4-5木 L=250

⑪D10-2木 L=1860


Figure 1 is a sectional view of a composite floor system. It shows a cross-section of a floor with a concrete slab (1) and a steel beam (2). The slab is supported by the beam. The total height of the slab is 1000 mm. The height of the beam is 300 mm. The width of the beam is 200 mm. The width of the slab is 617.5 mm. The width of the beam is 131 mm. The width of the slab is 281.5 mm. The width of the beam is 225 mm. The width of the slab is 300 mm. The width of the beam is 1200 mm. The width of the slab is 3800-600 mm. The width of the beam is 300 mm. The width of the slab is 50 mm.

類別	№	徑	長 (mm)	木數	質量 (kg)	形狀	材質
鉄	1	D16	3280	2	10.265		SD295A
	2	D16	3630	4	22.651		SD295A
	3	D8	1860	4	1.952		SD295A
	4	D6	1170	8	2.331		SD295A
	5	-	-	-	-	-	-
筋	6	φ4	1260	20	2.495		SD295A
	7	D16	1860	16	7.809		SD295A
	8	D10	300	8	1.344		SD295A
	9	φ4	140	12	0.166		SD295A
	10	φ4	250	6	0.149		SD295A
	11	D10	1860	2	2.083		SD295A
計					51.245		
型名登録			1485	kg			

Technical drawing of a double door with dimensions. The top horizontal dimension is 2000. Below it, segments are 100, 800, 200, 800, and 100. The right vertical dimension is 1510. The bottom horizontal dimension is divided into segments: 170, 330, 330, 340, 330, 330, and 170. The drawing shows a double door with two panels, each with a handle.

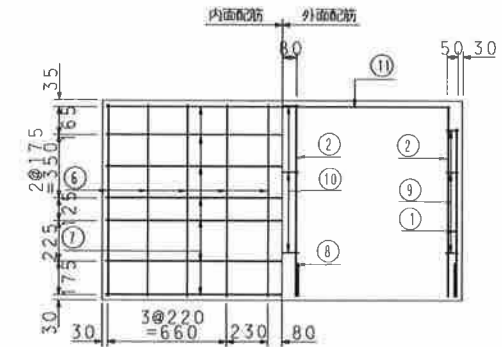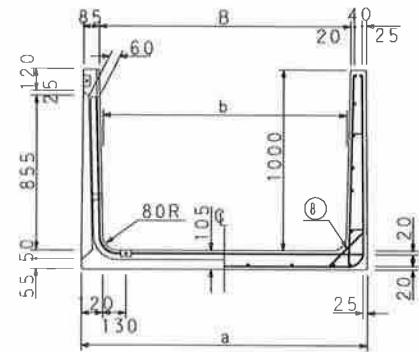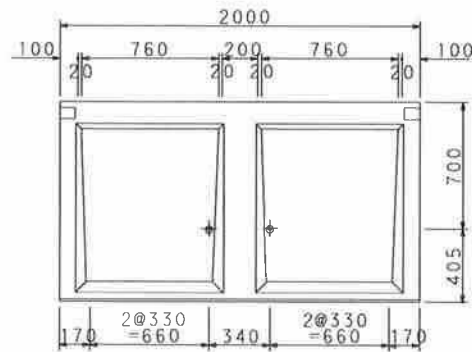

明寸法 (mm) HxB	配筋 (mm) - 種類 (本)										
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)
1000x 500	D13-2	D13-4	D6-3	D6-8	---	64-20	D6-14	D10-8	64-12	64-6	D10-2
600	*	*	*	*	---	---	*	*	*	*	*
700	*	*	*	*	---	---	*	*	*	*	*
800	*	*	D6-4	*	---	---	*	*	*	*	*
900	*	*	*	*	---	---	*	*	*	*	*
1000	*	*	*	*	---	---	*	*	*	*	*
1100	*	*	D6-5	*	---	---	*	*	*	*	*
1200	*	*	*	*	---	---	*	*	*	*	*
1300	*	*	*	*	---	---	*	*	*	*	*
1400	*	*	D6-6	*	---	---	*	*	*	*	*
1500	*	*	*	*	---	---	*	*	*	*	*
1600	*	*	*	*	D6-4	---	*	*	*	*	*
1700	*	*	D6-7	*	---	---	*	*	*	*	*
1800	*	*	*	*	---	---	*	*	*	*	*
1900	*	*	*	*	---	---	*	*	*	*	*
2000	*	*	D6-8	*	---	---	*	*	*	*	*



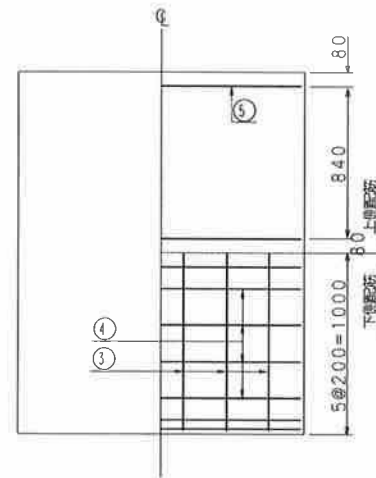


明寸法 (mm) HxB	寸法				重量
	B	b	a		kg
1000x 500	500	450	692		1025
600	600	550	792		1074
700	700	650	892		1123
800	800	750	992		1173
900	900	850	1092		1222
1000	1000	950	1192		1271
1100	1100	1050	1292		1321
1200	1200	1150	1392		1370
1300	1300	1250	1492		1419
1400	1400	1350	1592		1469
1500	1500	1450	1692		1518
1600	1600	1550	1792		1567
1700	1700	1650	1892		1617
1800	1800	1750	1992		1666
1900	1900	1850	2092		1715
2000	2000	1950	2192		1765


名 称	ワイドフリーウム	縮 尺	1/40	図 面	A4	作成日	15/4/15
規 格	H=1000 用水タイプ	図 番	WF-H-1000		区 分	製・配筋図	



和光産業株式会社

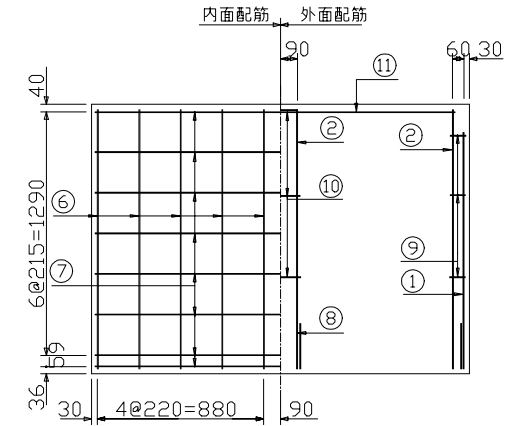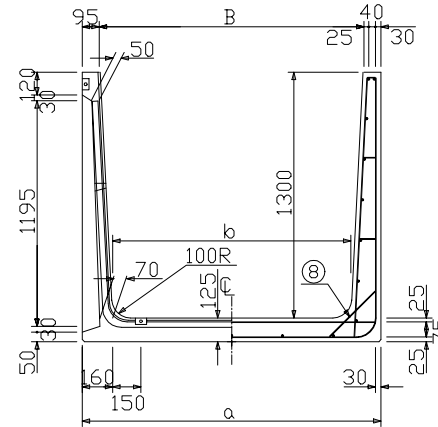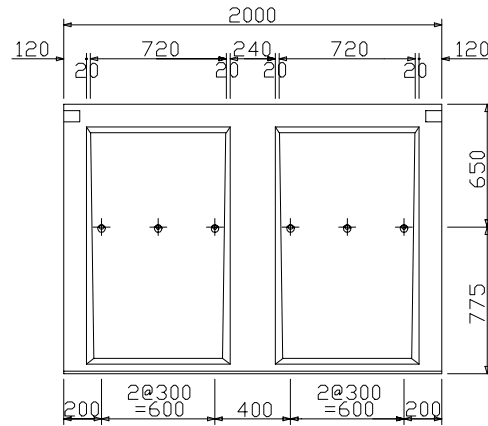

HxB	配筋(径<mm>-本数<本>)										
HxB	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
1300×800	D16-2	D16-4	D10-3	D10-6	—	φ4-20	D6-16	D10-8	φ4-12	φ4-6	D10-2
900	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
1000	〃	〃	D10-4	〃	〃	〃	〃	〃	〃	〃	〃
1100	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
1200	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
1300	〃	〃	D10-5	〃	〃	〃	〃	〃	〃	〃	〃
1400	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
1500	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
1600	〃	〃	D10-6	〃	〃	〃	〃	〃	〃	〃	〃
1700	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
1800	〃	〃	〃	〃	D10-4	〃	〃	〃	〃	〃	〃
1900	〃	〃	D10-7	〃	〃	〃	〃	〃	〃	〃	〃
2000	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2100	〃	〃	D10-8	〃	〃	〃	〃	〃	〃	〃	〃
2200	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2300	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2400	〃	〃	D10-9	〃	〃	〃	〃	〃	〃	〃	〃
2500	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2600	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃

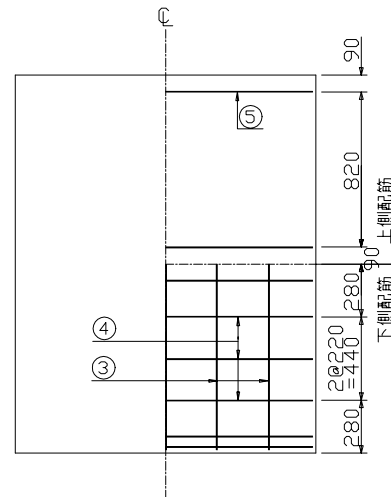

呼び寸法<mm>	寸法			参考質量
HxB	B	b	a	kg
1300×800	800	670	990	1547
900	900	770	1090	1606
1000	1000	870	1190	1665
1100	1100	970	1290	1724
1200	1200	1070	1390	1782
1300	1300	1170	1490	1841
1400	1400	1270	1590	1900
1500	1500	1370	1690	1959
1600	1600	1470	1790	2017
1700	1700	1570	1890	2076
1800	1800	1670	1990	2135
1900	1900	1770	2090	2194
2000	2000	1870	2190	2252
2100	2100	1970	2290	2311
2200	2200	2070	2390	2370
2300	2300	2170	2490	2429
2400	2400	2270	2590	2487
2500	2500	2370	2690	2546
2600	2600	2470	2790	2605

図面名称

ワイドフリューム（排水タイプ）H=1300

縮尺

1/40

色




検図

規 格


図番

作成日 04/3/23

和光産業株式会社

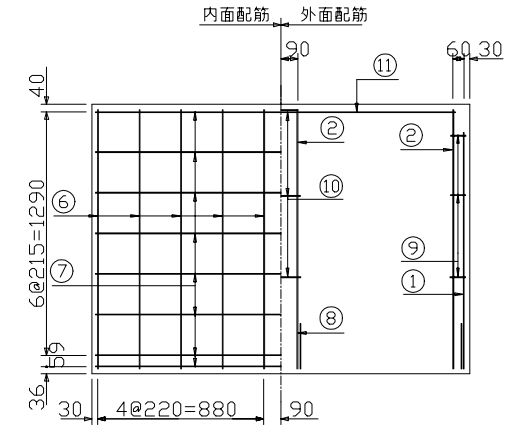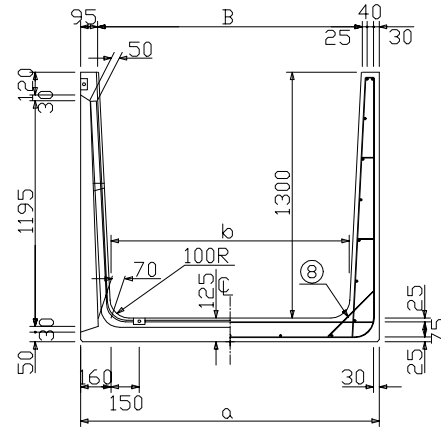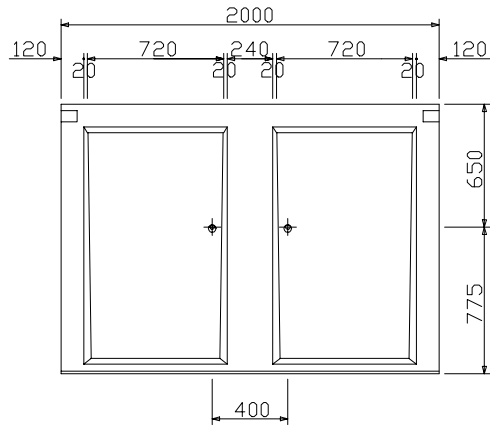

HxB	配筋(径<mm>-本数(本))										
	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
1300×800	D16-2	D16-4	D10-3	D10-6	—	φ4-20	D6-16	D10-8	φ4-12	φ4-6	D10-2
900	〃	〃	〃	〃	—	〃	〃	〃	〃	〃	〃
1000	〃	〃	D10-4	〃	—	〃	〃	〃	〃	〃	〃
1100	〃	〃	〃	〃	—	〃	〃	〃	〃	〃	〃
1200	〃	〃	〃	〃	—	〃	〃	〃	〃	〃	〃
1300	〃	〃	D10-5	〃	—	〃	〃	〃	〃	〃	〃
1400	〃	〃	〃	〃	—	〃	〃	〃	〃	〃	〃
1500	〃	〃	〃	〃	—	〃	〃	〃	〃	〃	〃
1600	〃	〃	D10-6	〃	—	〃	〃	〃	〃	〃	〃
1700	〃	〃	〃	〃	—	〃	〃	〃	〃	〃	〃
1800	〃	〃	〃	〃	D10-4	〃	〃	〃	〃	〃	〃
1900	〃	〃	D10-7	〃	〃	〃	〃	〃	〃	〃	〃
2000	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2100	〃	〃	D10-8	〃	〃	〃	〃	〃	〃	〃	〃
2200	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2300	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2400	〃	〃	D10-9	〃	〃	〃	〃	〃	〃	〃	〃
2500	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃
2600	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃	〃

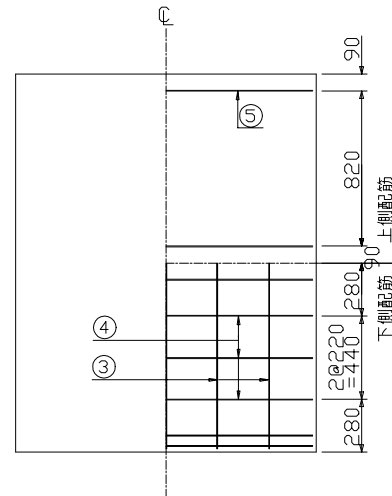

呼び寸法(mm)	寸法		mm	参考質量 kg
	B	b	a	
HxB				
1300x 800	800	670	990	1547
900	900	770	1090	1606
1000	1000	870	1190	1665
1100	1100	970	1290	1724
1200	1200	1070	1390	1782
1300	1300	1170	1490	1841
1400	1400	1270	1590	1900
1500	1500	1370	1690	1959
1600	1600	1470	1790	2017
1700	1700	1570	1890	2076
1800	1800	1670	1990	2135
1900	1900	1770	2090	2194
2000	2000	1870	2190	2252
2100	2100	1970	2290	2311
2200	2200	2070	2390	2370
2300	2300	2170	2490	2429
2400	2400	2270	2590	2487
2500	2500	2370	2690	2546
2600	2600	2470	2790	2605

図面名称

ワイドフレーム（用水タイプ）H=1300

縮尺

1/40

色

検図

規 格

図番

作成日

04/3/23

和光産業株式会社