

6, 上ふた式U形側溝及び蓋

1 種 150/180/240/300A/300B/300C/360B/450/600 × 600

2 種 150/180/240/300A/300B/300C/360B/450/600 × 600



1 種蓋 300/450/600

2 種蓋 300/600

上ぶた式U型側溝

JIS A 5372 準拠


- 1種 歩道用
- 2種 車道縦断用

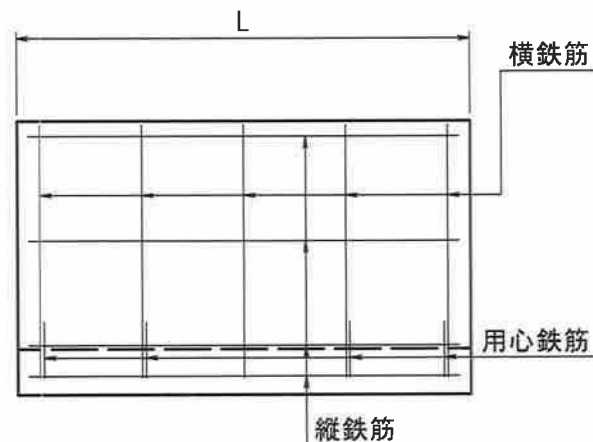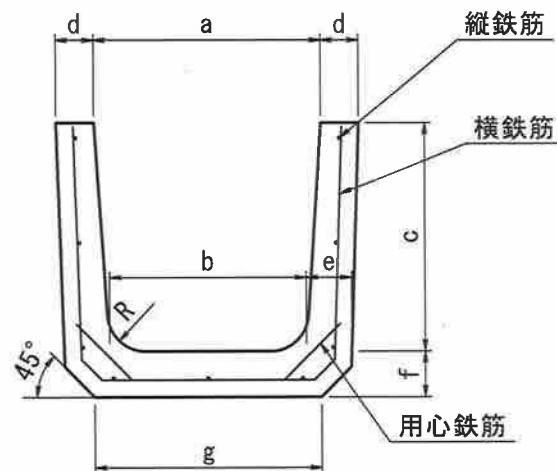

呼 称		寸 法 (mm)								参考重量 (kg)	縦鉄筋		横鉄筋		用心鉄筋1		用心鉄筋2			
		a	b	c	d	e	f	g	r		L	径 (mm)	数量(本)	径 (mm)	数量(本)	径 (mm)	数量(本)	径 (mm)	数量(本)	
1種	150	150	140	150	30	35	35	160	30	600	25	2.6	5	2.6	5					
	180	180	170	180	35	40	40	190	50		34	2.6	5	3.2	5					
	240	240	220	240	45	50	50	240			56	3.2	7	3.2	5					
	300A	300	260		50	60	60	300			71	3.2	9	4.0	5					
	300B			300			81				3.2	9	4.0	5						
	300C			360			65				360	91	3.2	11	4.0	7				
	360B	360	310	360		100		4.0				11	4.0	8						
	450	450	400	450	55	70	70	430			70	137	4.0	13	5.0	8				
	600	600	540	600	70	80	80	600				213	D6	15	D6	8				
2種	150	150	140	150	30	35	35	160		30	600	25	4.0	5	5.0	9				
	180	180	170	180	35	40	40	190	50	34		4.0	5	6.0	9					
	240	240	220	240	45	50	50	240		56		D6	7	D6	9					
	300A	300	260		50	60	60	300		71		D6	9	D10	5					
	300B			300			81			D6		9	D10	5						
	300C			360			65			360		91	D6	11	D10	5				
	360B	360	310	360		100		D6				11	D10	5						
	450	450	400	450	55	70	70	430		70		137	D6	13	D10	5				
	600	600	540	600	70	80	80	600				213	D6	15	D10	5	6.0	8	3.2	4
許容差		±2	±3	±2							±3									

上ぶた式U型側溝蓋

S=1:10

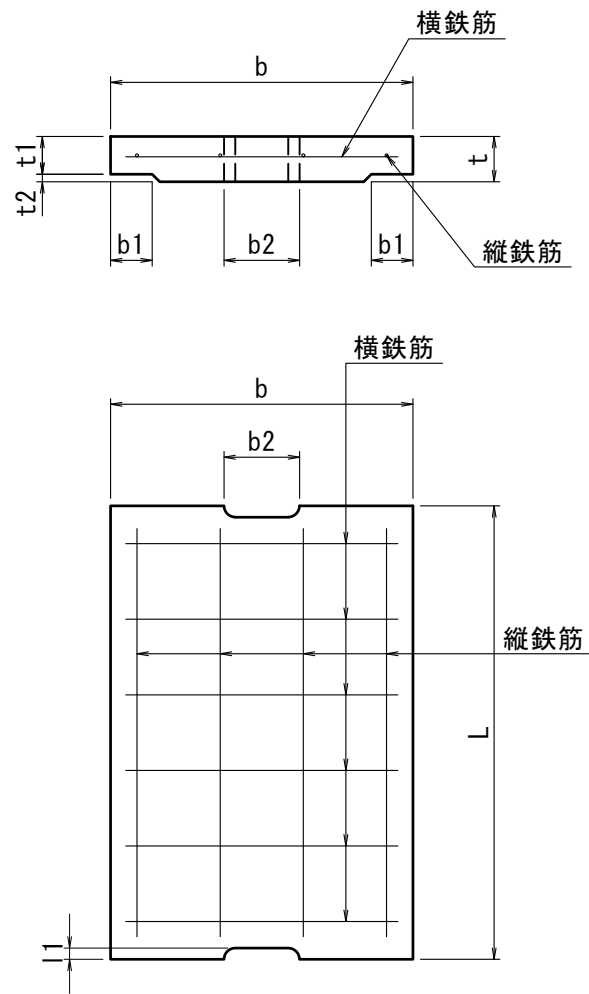

呼 称		寸 法 (mm)							参考重量 (kg)	横鉄筋		縦鉄筋		
		b	b1	b2	t	t1	t2	l1		L	径 (mm)	数量 (本)	径 (mm)	数量 (本)
1種	300	400	55	100	60	50	10	15	600	34	φ 4.0	6	φ 3.2	4
	450	560	60	120	70	60		20		56	φ 6.0	5	φ 4.0	5
	600	740	75	150	75	65		18		78	φ 6.0	6	φ 4.0	6
2種	300	400	55	100	100	85	15	15	600	56	D10	5	φ 6.0	4
	600	740	75	150	150	130	20	18		159	D10	6	φ 6.0	6
許容差		±3			±2				±3					