



落ちふた式U形側溝（本体）

(例1-300A)

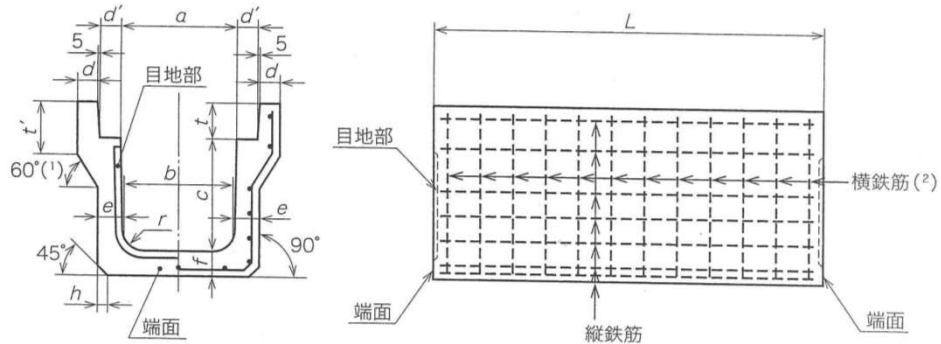

(例3-300A)

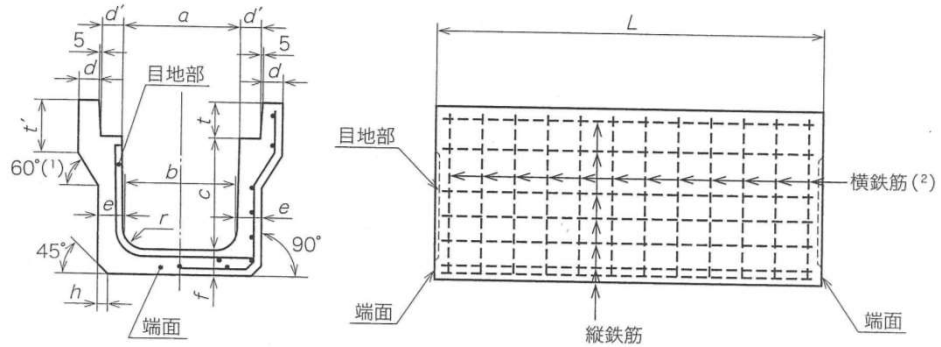

単位:mm

種類	呼び名	寸法											配筋								
		a	b	c	d	d'	e	f	h	t	t'	r	l	横鉄筋(外側筋)			横鉄筋(底版筋)			縦鉄筋	
		径	l=2m	l=1m	径	l=2m	l=1m	径	本数												
1種	250	250	230	250	40	55	55	55	20	90	120	50	2000 又は 1000	4.00	10	6	-	-	-	4.00	11
	300A		280	300			60	60													95
	300B	300	270	400			70	70						110	14						
	300C		260	500			70	70						125	15						
	400A	400	370	400	70	70	125	15	5.00	10	6	-	-	-	-	-	-	-	-		14
	400B		360	500	80	80	150	16													
	500A	500	460	500	80	80	150	16	D6	10	6	-	-	-	-	-	-	-	-		17
	500B		450	600	90	90	175	21													
3種		250	230	250	45	55	65	65	30	90	120	50	2000 又は 1000	D6	14	7	-	-	-	4.00	11
			280	300			70	70							95	140	16	8	-		-
	300B	300	270	400	50	55	80	80	40	95	140	50	2000 又は 1000	D6	19	11	10	11	6	4.00	15
	300C		260	500			70	70							110	155					21
	400A	400	370	400	55	55	80	80	40	110	155	50	2000 又は 1000	D6	23	12	12	12	6	4.00	17
	400B		360	500			80	80							125	175					23
	500A	500	460	500	60	60	90	90	40	125	155	50	2000 又は 1000	D6	25	13	13	7	6	4.00	19
	500B		450	600			90	90							175	24					
寸法の許容差		±3					-	±3	-	±6	-										

※ l=2mと1mの箇所の数字は、鉄筋本数とする。
又、1種500Bの横鉄筋のD6は、Ø6.00でもよい。