



落ちふた式U形側溝（本体）

(例1-300A)

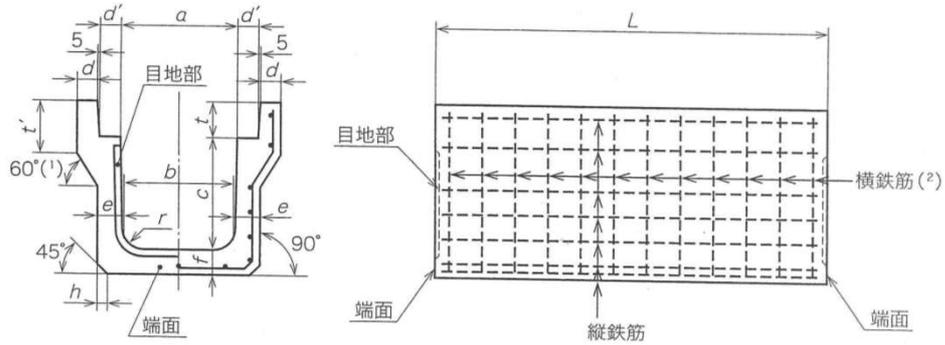

(例3-300A)

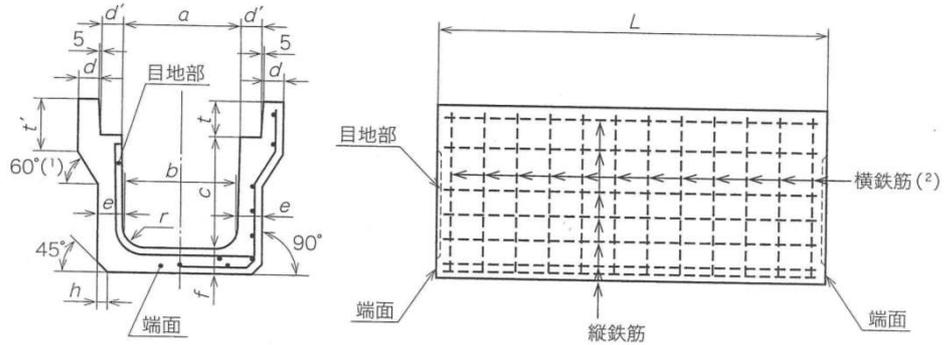

単位:mm

種類	呼び名	寸法											配筋												
		a	b	c	d	d'	e	f	h	t	t'	r	l	横鉄筋(外側筋)			横鉄筋(底版筋)			縦鉄筋					
		径	l=2m	l=1m	径	l=2m	l=1m	径	本数																
1種	250	230	250	40	55	55	55	20	90	50	2000 又は 1000	4.00	10	6	-	4.00	11								
		280	300			60	60		120																
	300	270	400			65	65		95																
		260	500			70	70		135																
	400	370	400	70	70	110	150																		
		360	500	75	75	125	150																		
	500	460	500	75	75	125	150																		
		450	600	45	60	75	75	125	150																
3種	250	250	230	250	45	65	65	30	90	120	50	2000 又は 1000	D6	14	7	D6	6	4.00	11						
	300A	280	300	50	55	70	70	40	95	140				16	8					-	-	-			
		300	270			400	80							80	110					155	19	11	10	6	
	260		500	70	70	125	175	21	11	11															
	400	370	400	55	70			80	80	125				155	175					23	12	12			
		360	500	80	80	13	7																		
	500	460	500	60	60	90	90	125	155	175				25	13										
		450	600	90	90	125	155	175																	
	寸法の許容差		±3					-	±3	-				±6	-										

※ l=2mと1mの箇所の数字は、鉄筋本数とする。
又、1種500Bの横鉄筋のD6は、Ø6.00でもよい。