


ベンチフリューム用蓋

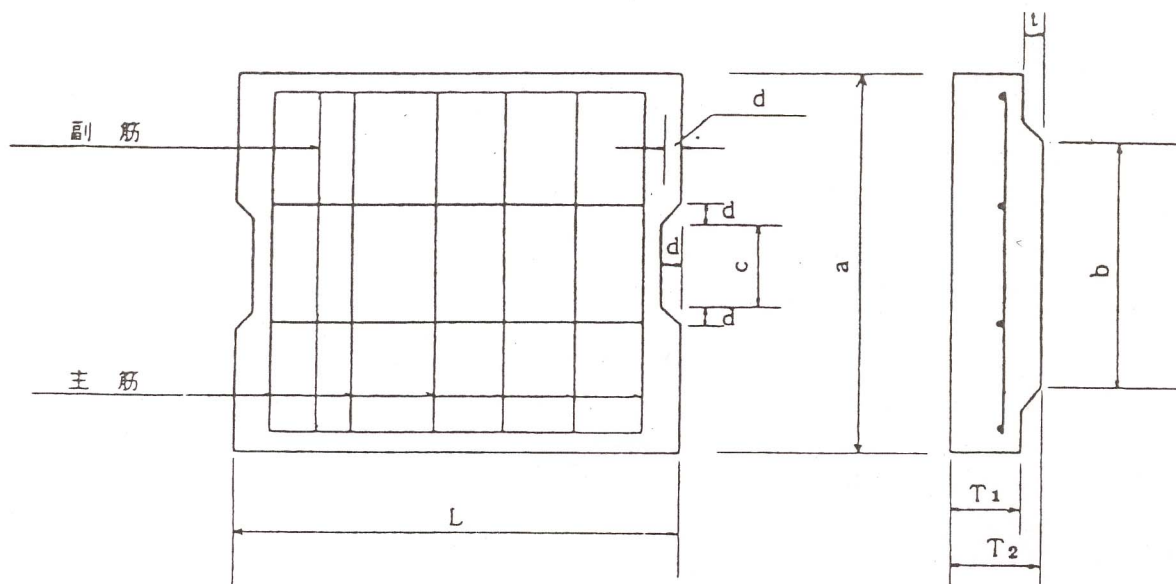

規格表

(寸法の単位mm)

	サイズ	a	b	c	d	T ₁	T ₂	t	L	主筋	副筋	参考重量
										径×本	径×本	
一 種 (T=4t 以下)	200	290	180	75	15	55	60	5	500	∅ 6×8	∅ 6×3	21
	250	340	230	90	∥	55	60	∥	∥	∅ 6×9	∥	24
	300	390	280	100	∥	65	70	∥	∥	D10×5	∥	33
	350	450	330	100	∥	65	70	∥	∥	∥	∅ 6×4	38
	400	520	380	120	∥	65	70	∥	∥	∥	∥	44
	450	570	430	120	∥	75	80	∥	∥	D10×6	D10×4	55
	500	630	480	120	∥	75	80	∥	∥	∥	∥	60
	550	680	530	150	∥	75	80	∥	∥	∥	D10×5	65
	600	730	580	150	∥	75	80	∥	∥	∥	∥	70
	650	780	630	150	∥	75	80	∥	∥	D10×7	∥	75
700	850	680	200	∥	85	90	∥	∥	∥	D10×6	92	
800	950	780	200	∥	85	90	∥	∥	D10×8	∥	103	
900	1060	880	200	∥	85	90	∥	∥	∥	∥	114	
1000	1160	980	200	∥	95	100	∥	∥	∥	∥	139	
二 種 (T=14t 以下)	200	290	180	75	15	85	90	5	500	D10×8	D10×3	31
	250	340	230	90	∥	95	100	∥	∥	D13×5	∥	41
	300	390	280	100	∥	∥	100	∥	∥	∥	D10×4	47
	350	450	330	100	∥	105	110	∥	∥	∥	∥	59
	400	520	380	120	∥	∥	110	∥	∥	∥	∥	69
	450	570	430	120	∥	115	120	∥	∥	∥	D10×5	82
	500	630	480	120	∥	∥	120	∥	∥	D13×6	∥	91
	550	680	530	150	∥	125	130	∥	∥	∥	∥	106
	600	730	580	150	∥	∥	130	∥	∥	∥	D10×6	114
	650	780	630	150	∥	135	140	∥	∥	∥	∥	131
700	850	680	200	∥	∥	140	∥	∥	∥	D13×6	143	
800	950	780	200	∥	∥	140	∥	∥	∥	∥	160	
900	1060	880	200	∥	145	150	∥	∥	D13×7	∥	191	
1000	1160	980	200	∥	155	160	∥	∥	D13×8	∥	223	

許 容 差	a 及び L	T ₁ T ₂ 及び b・c・d
	± 3	± 2