


# 鉄筋コンクリート MEP-2型 形状

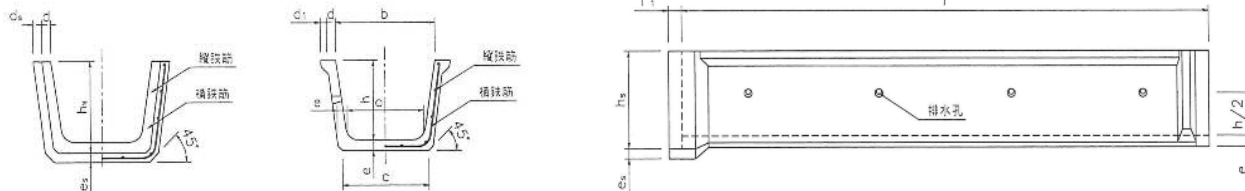

「 寸 法 表 」

呼び名 h × a	寸 法 (mm)											配 筋						参考 重量 (kg)
	b	c	d	d1	e	r	l	l1	hs	ds	es	縦鉄筋		横鉄筋		ソケット筋		
												径	本数	径	本数	径	本数	
200 × 200	260	235	30	20	35	40	2000	50	243	30	30	3.2	7	3.2	10	3.2	1	122
250 × 250	325	285	30	20	35	50	2000	50	293	30	30	3.2	8	3.2	18	3.2	1	149
300 × 300	390	340	35	25	40	50	1995	50	348	30	35	3.2	10	4.0	18	3.2	1	205
350 × 350	455	390	35	25	45	50	2000	50	403	30	35	3.2	11	4.0	20	3.2	1	255
400 × 300	420	350	40	30	50	50	2000	50	458	35	40	4.0	10	5.0	16	4.0	1	300
400 × 400	520	450	40	30	50	50	2000	50	458	35	40	4.0	11	5.0	16	4.0	1	321
400 × 500	620	550	40	30	50	50	2000	50	458	35	40	4.0	12	5.0	16	4.0	1	-
400 × 600	720	650	40	30	50	50	2000	50	458	35	40	4.0	13	5.0	16	4.0	1	-
450 × 450	585	495	40	30	50	50	2000	50	508	35	40	4.0	12	5.0	20	4.0	1	365
500 × 300	450	355	40	30	55	60	2000	50	563	35	40	4.0	12	6.0	20	4.0	1	372
500 × 400	550	455	40	30	55	60	2000	50	563	35	40	4.0	11	6.0	16	4.0	1	407
500 × 500	650	555	45	30	55	60	2000	50	563	40	45	4.0	12	6.0	16	4.0	1	441
500 × 600	750	655	45	30	55	60	2000	50	563	40	45	4.0	13	6.0	16	4.0	1	470
500 × 800	950	855	45	30	55	60	2000	50	563	40	45	4.0	14	6.0	16	4.0	1	-
600 × 300	480	365	45	30	65	60	2000	50	673	40	45	4.0	11	6.0	22	4.0	1	502
600 × 400	580	465	45	30	65	60	2000	50	673	40	45	4.0	12	6.0	22	4.0	1	540
600 × 500	680	565	45	30	65	60	2000	50	673	40	45	4.0	12	6.0	22	4.0	1	580
600 × 600	780	665	50	30	65	60	2000	50	673	45	50	4.0	12	6.0	22	4.0	1	600
600 × 800	980	865	50	30	65	60	2000	50	673	45	50	4.0	13	6.0	22	4.0	1	665
800 × 600	840	680	55	30	80	70	2000	50	888	50	55	5.0	16	D10	12	5.0	1	864
800 × 800	1040	880	55	30	80	70	2000	50	888	50	55	5.0	17	D10	12	5.0	1	970
800 × 1000	1240	1080	55	30	80	70	2000	50	888	50	55	5.0	18	D10	12	5.0	1	1040
1000 × 800	1100	875	60	30	90	80	1000	50	1098	55	60	5.0	18	D10	8	6.0	1	661
1000 × 1000	1300	1075	60	30	90	80	1000	50	1098	55	60	5.0	19	D10	8	6.0	1	710
1000 × 1200	1500	1275	60	30	90	80	1000	50	1098	55	60	5.0	20	D10	8	6.0	1	-